

## 高性能多通道音频模数转换器 (ADC)

### 特性

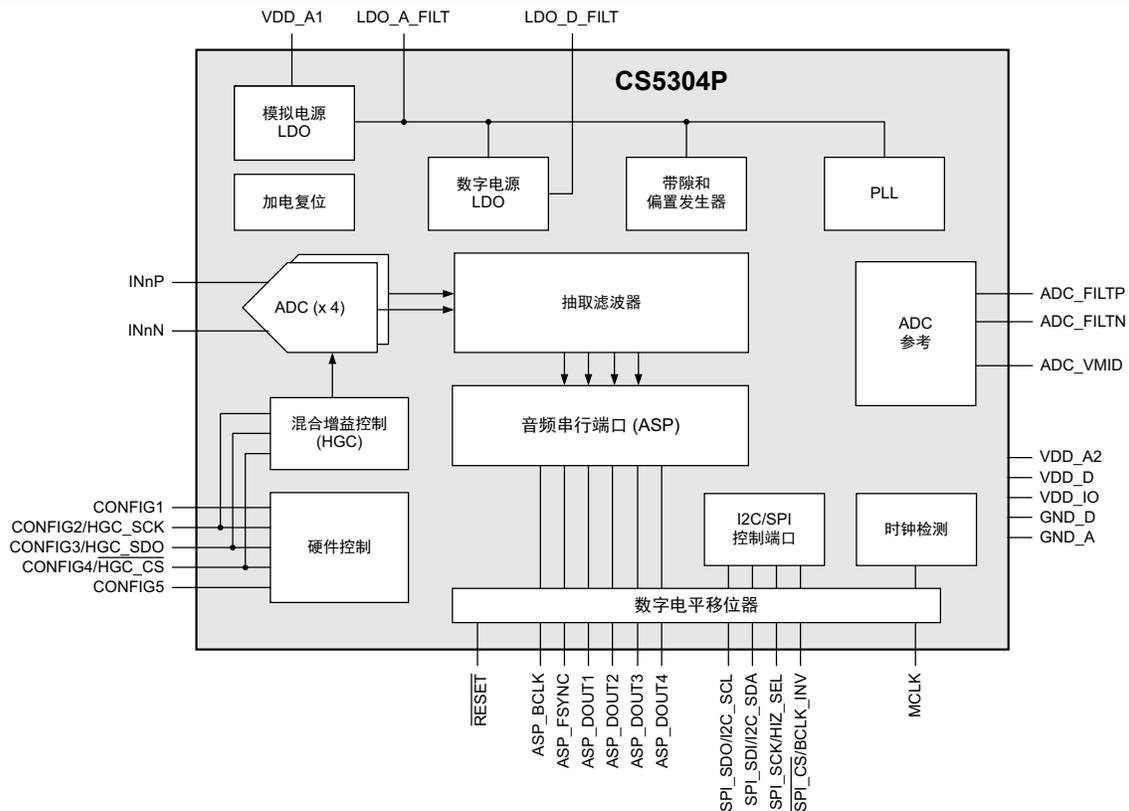
- 高性能四通道 ADC
  - 差分模拟架构
  - 高分辨率 32 位数字架构
  - 先进的多位  $\Sigma$ - $\Delta$  模数转换器 (ADC)
  - 低延迟数字滤波器和数字音量控制
- PLL 支持各种外部系统时钟参考
- 多器件采样时序对齐
- 同步控制外部前置放大器增益
- 音频串行端口 (ASP) 采样率高达 768 kHz
  - I<sup>2</sup>S、左对齐和 TDM 数据格式
- 硬件和软件控制模式
  - I<sup>2</sup>C 控制端口时钟频率高达 1 MHz
  - SPI 控制端口时钟频率高达 24 MHz
  - 无需主机处理器即可进行硬件控制
- 3.3 V 单电源供电
  - 支持 1.8 V–3.3 V 数字输入 / 输出
- 48 引脚 QFN 封装

### 规格

- 123 分贝动态范围 (A 加权)
- 129 分贝动态范围 (ADC 输入求和)
- -110 分贝总谐波失真加噪声 (THD+N)
- 在 96 kHz 采样率下, 群延迟为 4.1/Fs (慢速滚降、最小相位滤波器)
- 每通道功耗 32 mW (4 个通道启用时)
- 2 V<sub>RMS</sub> 差分模拟输入
- 高通滤波器

### 应用

- 音频 / 视频接收机
- 数字调音台
- 数字音频工作站 (DAW) 接口
- 乐器



---

## 产品概述

CS5304P 是一款高性能、32 位分辨率的四通道模数转换器 (ADC)。CS5304P 支持差分模拟输入，可通过音频串行端口 (ASP) 以高达 768 kHz 的采样率提供 32 位数字输出。CS5304P 采用了 5 阶多位  $\Sigma$ - $\Delta$  调制器，以及数字滤波和抽取技术。该 ADC 采用差分架构设计，在实现高性能的同时兼顾低功耗特性。

CS5304P 可通过支持 I<sup>2</sup>C 和串行外设接口 (SPI) 操作模式的控制接口进行配置。该器件也可在硬件模式下运行，利用外部电阻选择所需配置。硬件控制支持多种选项，包括系统时钟、音频串行端口 (ASP) 格式、采样率及数字滤波器选择。

低延迟数字滤波器针对适用的采样率进行了优化。快速或慢速滚降滤波器可与最小相位或线性相位响应结合，以适配目标信号特性需求。

CS5304P 支持对每个 ADC 输入通道关联的外部前置放大器进行同步控制。外部与内部增益设置的更新完全同步，且具备瞬态掩蔽功能，确保在所有信号电平下均能实现无缝运行。

ASP 支持 I<sup>2</sup>S、左对齐和 TDM 数据格式的多通道操作。所配备的四个数据输出引脚可支持 32 位多通道操作，最高采样率达 768 kHz。数据输出引脚的三态控制功能允许多个器件在共享总线上协同工作。

CS5304P 的时钟可源自 ASP，也可由独立时钟源提供。集成锁相环 (PLL) 可减少抖动，并支持多种参考时钟频率选项。该 ADC 采样时序以 ASP 数据帧为基准，使共享同一数据总线的多个器件能够实现时间对齐操作。

该 CS5304P 可采用 3.3 V 单电源供电，集成稳压器提供 1.2 V 数字核心电源。通过独立外部电源，数字输入 / 输出还可支持 1.8 V 逻辑电平。该器件兼具高性能与低功耗优势。

CS5304P 采用商用级 0.4 mm 间距、48 引脚扁平无引脚 (QFN) 封装，工作温度范围为 -40°C 至 +85°C。

订购信息参见第 12 节。

**Table of Contents**

<b>1 Pin Assignments and Descriptions</b>	<b>4</b>
1.1 48-Pin QFN (Top View, Through-Package)	4
1.2 QFN Pin Descriptions	4
1.3 Termination of Unused Pins	6
1.4 Electrostatic Discharge (ESD) Protection	6
<b>2 Typical Connection Diagram</b>	<b>7</b>
<b>3 Characteristics and Specifications</b>	<b>9</b>
Table 3-1. Parameter Definitions	9
Table 3-2. Recommended Operating Conditions	9
Table 3-3. Absolute Maximum Ratings	9
Table 3-4. ADC Path Characteristics	10
Table 3-5. ADC Filter Characteristics	11
Table 3-6. ADC High-Pass Filter (HPF)	12
Table 3-7. Device Power Consumption	12
Table 3-8. Digital Interface Specifications and Characteristics	12
Table 3-9. DC Characteristics	13
Table 3-10. Switching Specifications—Reset and Clock References	13
Table 3-11. Switching Specifications—Audio Serial Port (ASP)	14
Table 3-12. Switching Specifications—I <sup>2</sup> C Control Port	16
Table 3-13. Switching Specifications—SPI Control Port	17
Table 3-14. Switching Specifications—SPI Controller (Hybrid Gain Control)	18
<b>4 Functional Description</b>	<b>19</b>
4.1 Device Power and Reset	19
4.2 Hardware Configuration	19
4.3 Software Configuration	21
4.4 System Clocking	22
4.5 ADC and Analog Input	24
4.6 Digital Filter Selection	31
4.7 Audio Serial Port (ASP)	32
4.8 I <sup>2</sup> C/SPI Control Port	40
4.9 General-Purpose Output	44
4.10 Device ID	45
<b>5 Applications</b>	<b>46</b>
5.1 Input Buffer Circuit	46
<b>6 Register Quick Reference</b>	<b>48</b>
6.1 DEVID	48
6.2 CONFIG	48
6.3 INPUT_PATH	49
6.4 CTRL_KEYS	49
6.5 HGC	49
6.6 PIN_CONFIG	51
6.7 CLIP_DETECT	51
<b>7 Register Descriptions</b>	<b>52</b>
7.1 DEVID	52
7.2 CONFIG	53
7.3 INPUT_PATH	55
7.4 CTRL_KEYS	58
7.5 HGC	58
7.6 PIN_CONFIG	67
7.7 CLIP_DETECT	71
<b>8 Performance Plots</b>	<b>73</b>
8.1 ADC Filter Response	73
<b>9 Thermal Characteristics</b>	<b>84</b>
<b>10 Package Dimensions</b>	<b>84</b>
<b>11 Package Marking</b>	<b>85</b>
<b>12 Ordering Information</b>	<b>85</b>
<b>13 References</b>	<b>85</b>
<b>14 Revision History</b>	<b>85</b>

# 1 Pin Assignments and Descriptions

## 1.1 48-Pin QFN (Top View, Through-Package)

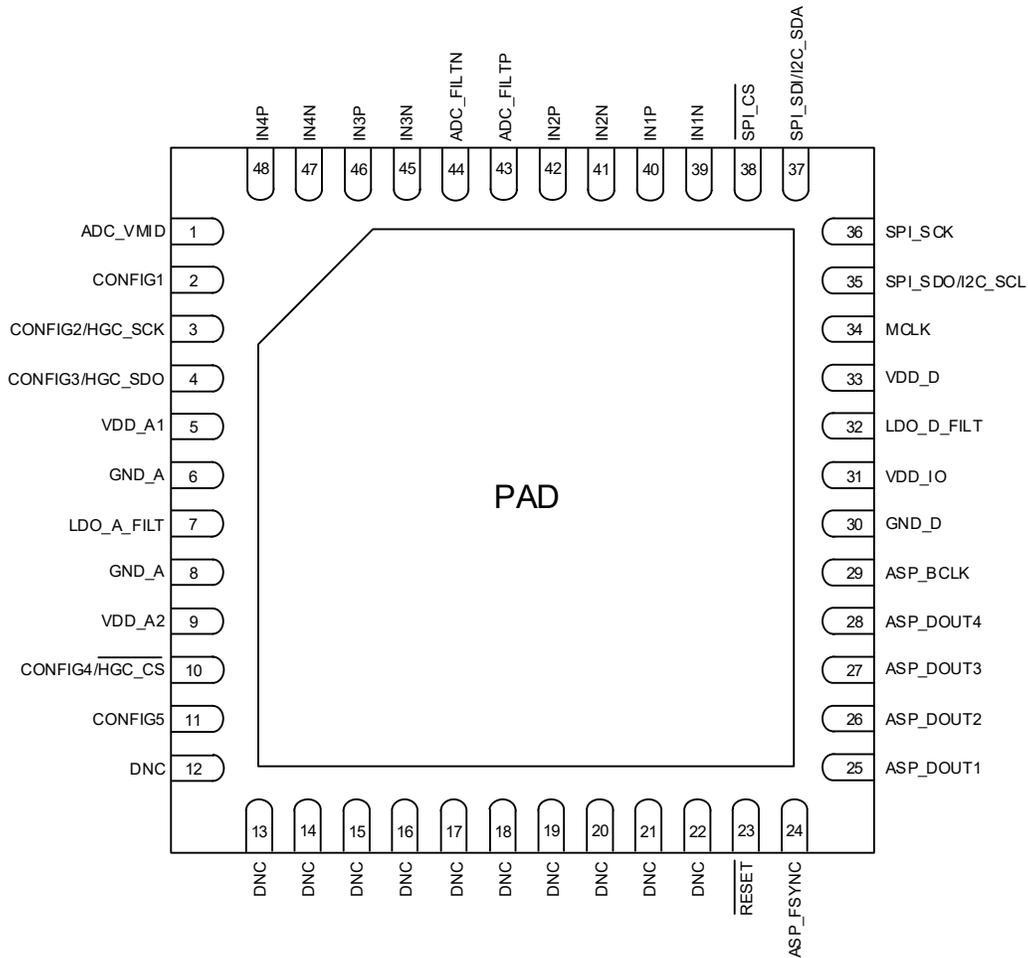


Figure 1-1. QFN 48-pin diagram (Top View, Through Package)

## 1.2 QFN Pin Descriptions

Table 1-1. QFN Pin Descriptions

Pin Name	Pin #	Power Supply	I/O	Description
<b>Digital I/O</b>				
ASP_BCLK	29	VDD_IO	I/O	Audio serial port bit clock.
ASP_FSYNC	24	VDD_IO	I/O	Audio serial port frame sync.
ASP_DOUT1	25	VDD_IO	O	Audio serial port data output.
ASP_DOUT2	26			
ASP_DOUT3	27			
ASP_DOUT4	28			
SPI_SDO/I2C_SCL	35	VDD_IO	I/O	SPI data output/I2C clock input.
SPI_SCK	36	VDD_IO	I	SPI clock.
SPI_SDI/I2C_SDA	37	VDD_IO	I/O	SPI data input/I2C data input/output.

**Table 1-1. QFN Pin Descriptions (Cont.)**

Pin Name	Pin #	Power Supply	I/O	Description
SPI_CS	38	VDD_IO	I	SPI chip select (active low).
MCLK	34	VDD_IO	I	Master clock input (active low).
RESET	23	VDD_IO	I	Hardware reset control.
<b>Analog I/O</b>				
ADC_FILT	44	VDD_A	O	ADC external capacitor connection.
ADC_FILT_P	43			ADC_FILT_P should be connected to VDD_A via a 1 Ω resistor.
ADC_VMID	1	VDD_A	O	Mid-rail voltage reference output.
CONFIG1	2	VDD_A	I/O	Hardware control pins.
CONFIG2/HGC_SCK	3			In software control mode, CONFIG2–4 support the hybrid gain control (HGC) SPI controller interface.
CONFIG3/HGC_SDO	4			
CONFIG4/HGC_CS	10			In software control mode, CONFIG5 selects the I <sup>2</sup> C target address.
CONFIG5	11			
IN1N	39	VDD_A	I	Analog Input 1.
IN1P	40			
IN2N	41	VDD_A	I	Analog Input 2.
IN2P	42			
IN3N	45	VDD_A	I	Analog Input 3.
IN3P	46			
IN4N	47	VDD_A	I	Analog Input 4.
IN4P	48			
LDO_A_FILT	7	VDD_A	O	LDO_A regulator external capacitor connection.
LDO_D_FILT	32	VDD_A	O	LDO_D regulator external capacitor connection.
<b>Power Supplies</b>				
VDD_D	33	—	—	Digital supply (powered from internal LDO)
VDD_A1	5	—	—	Analog supply
VDD_A2	9	—	—	Analog supply
VDD_IO	31	—	—	Digital I/O supply
GND_D	30	—	—	Digital ground <sup>1</sup>
GND_A	6, 8, PAD	—	—	Analog ground <sup>1</sup>
<b>No Connect</b>				
DNC	12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	—	—	Do not connect.

1. All ground pins, including the ground paddle, must be tied to a common ground plane directly underneath the CS5304P.

## 1.3 Termination of Unused Pins

Table 1-2 shows the required termination for unused pins (i.e., if the functionality of the pin is not being used). Pins not listed must be connected as shown in the typical connection drawings (see Section 2).

**Table 1-2. Termination of Unused Pins**

Name	Termination if unused
ASP_DOUTx	Float
INxP, INxN <sup>1</sup>	
SPI_SDO/I2C_SCL	Connect to ground
SPI_SCK	
SPI_SDI/I2C_SDA	
CONFIGx	
MCLK	Connect to ASP_BCLK
RESET	Connect to VDD_IO
SPI_CS	

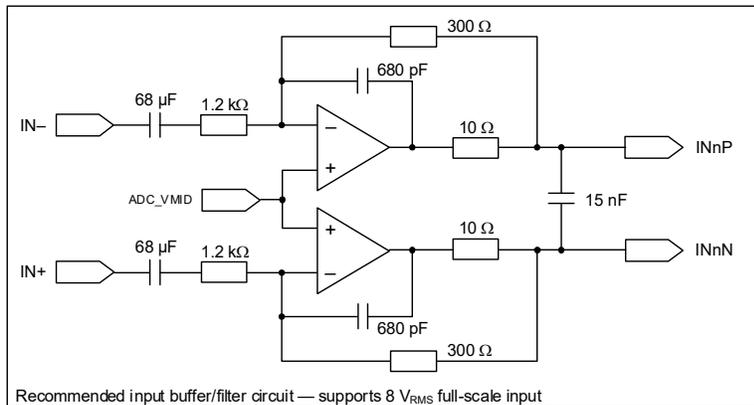
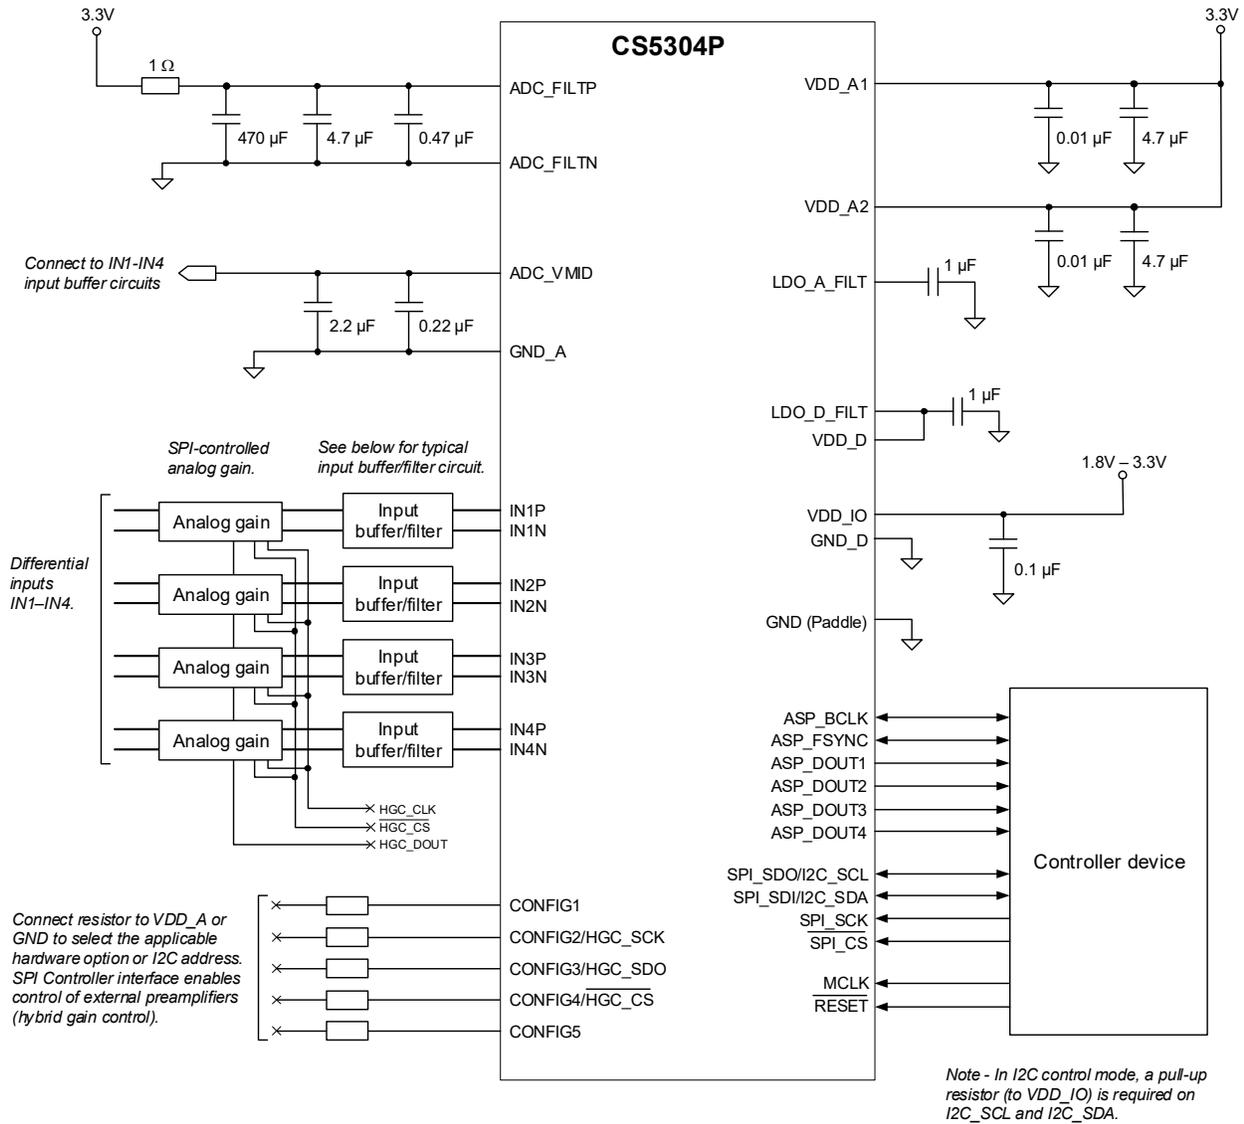
1. See Section 5.1.2 for requirements in case of single-ended input configurations.

## 1.4 Electrostatic Discharge (ESD) Protection






ESD-sensitive device. The CS5304P is manufactured on a CMOS process. Therefore, it is generically susceptible to damage from excessive static voltages. Proper ESD precautions must be taken while handling and storing this device. This device is qualified to current JEDEC ESD protection standards.

## 2 Typical Connection Diagram



**Note:** If mid-impedance input is selected, or if hardware control mode is used, the VMID reference used by the input buffer must be provided using external components as shown in Fig. 2-2.

**Figure 2-1. Typical Connections—Using Internal VMID Reference**

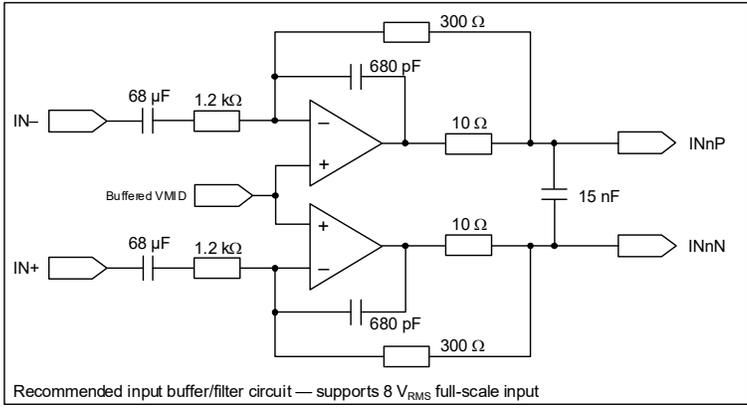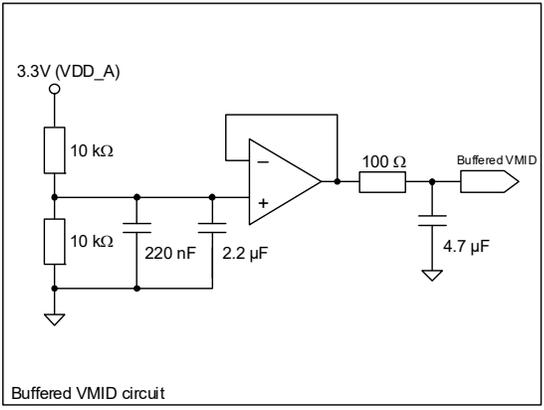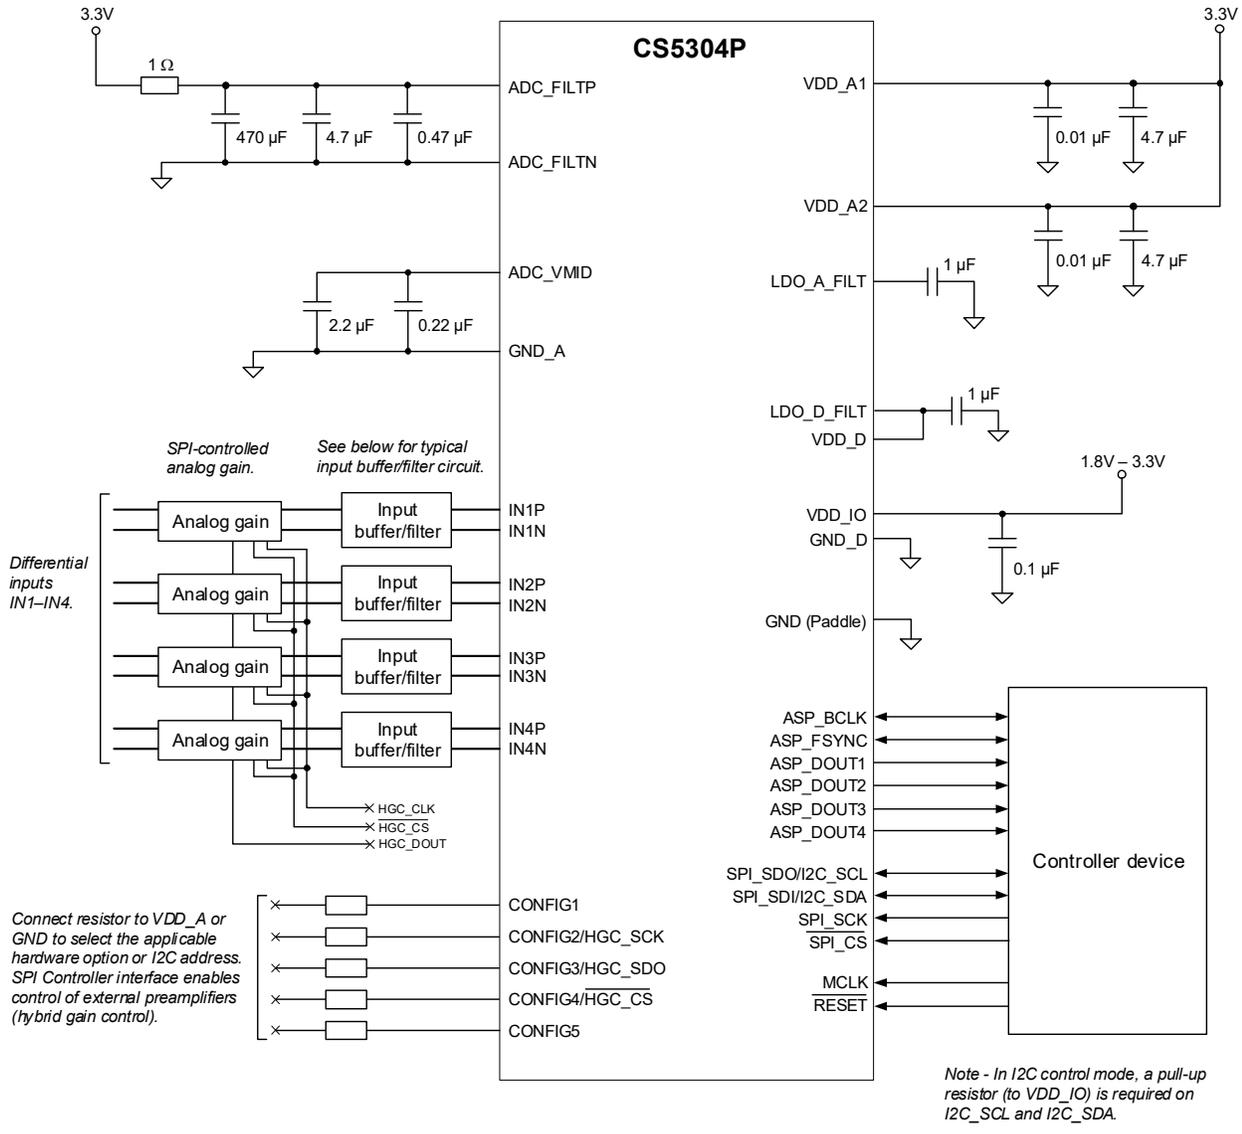

**Figure 2-2. Typical Connections—Using External VMID Reference**

### 3 Characteristics and Specifications

Table 3-1 defines parameters as they are characterized in this section. Note that default register field configurations are used unless specified otherwise in the test conditions.

**Table 3-1. Parameter Definitions**

Parameter	Definition
Channel separation	The difference in level between the active channel (driven to maximum full scale output) and the measured signal level in the idle channel at the test signal frequency. The active channel is configured and supplied with an appropriate input signal to drive a full scale output, with signal measured at the output of the associated idle channel.
Common-mode rejection ratio (CMRR)	The ratio of a specified input signal (applied to both sides of a differential input), relative to the output signal that results from it.
Signal-to-noise ratio (SNR)	The difference in level between the maximum full-scale output signal and the output with no input signal applied.
Dynamic range	The difference in level between the maximum full-scale output signal and the sum of all harmonic distortion products plus noise with a low-level input signal applied (an input signal level 60 dB below full scale is used).
Power-supply rejection ratio (PSRR)	The ratio of a specified power supply variation relative to the output signal that results from it. PSRR is measured under quiescent signal path conditions.
Total harmonic distortion plus noise (THD+N)	The ratio of the RMS sum of the harmonic distortion products plus noise in the specified bandwidth relative to the RMS amplitude of the fundamental (i.e., test frequency) output.

**Note:** Unless specified otherwise, all performance measurements are for a 10 Hz to 20 kHz bandwidth.

**Table 3-2. Recommended Operating Conditions**

Test conditions (unless specified otherwise): Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground.

Parameter		Symbol	Minimum	Maximum	Unit
DC power supply	Analog supply <sup>1</sup>	VDD_A1, VDD_A2	3.13	3.47	V
	Digital supply (powered from internal LDO) <sup>2</sup>	VDD_D	1.14	1.26	V
	Digital I/O supply	VDD_IO	1.71	3.63	V
Supply ramp up/down (all supplies)		t <sub>PWR-UD</sub>	0.01	10	ms
Ambient temperature		T <sub>A</sub>	-40	+85	°C

**Note:** The device is fully functional and meets all parametric specifications in this section if operated within the specified conditions. Functionality and parametric performance is not guaranteed or implied outside of these limits. Operation outside of these limits may adversely affect device reliability.

1. The VDD\_A1 and VDD\_A2 rails should be tied together and powered from a single supply. The associated power domain is referred to as VDD\_A.
2. The digital supply is powered from an internal LDO regulator. The VDD\_D pin must be connected to the LDO output pin, LDO\_D\_FILT.

**Table 3-3. Absolute Maximum Ratings**

Test conditions (unless specified otherwise): Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground.

Parameter		Symbol	Minimum	Maximum	Unit
DC power supply	Analog supply <sup>1</sup>	VDD_A1, VDD_A2	-0.3	4.32	V
	Digital supply	VDD_D	-0.3	1.52	V
	Digital I/O supply	VDD_IO	-0.3	4.32	V
External voltage applied to digital input/output		V <sub>INDI</sub>	-0.3	VDD_IO + 0.3	V
External voltage applied to analog inputs		V <sub>INAI</sub>	-0.3	VDD_A + 0.3	V
Input current	digital input/output	I <sub>in</sub>	—	±10	mA
	analog inputs		—	±10	mA
Ambient operating temperature		T <sub>A</sub>	-40	+115	°C
Junction operating temperature		T <sub>J</sub>	-40	+125	°C
Storage temperature		T <sub>STG</sub>	-65	+150	°C

**Caution:** Stresses beyond “Absolute Maximum Ratings” levels may cause permanent damage to the device. These levels are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in Table 3-2 is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

1. The VDD\_A1 and VDD\_A2 rails should be tied together and powered from a single supply. The associated power domain is referred to as VDD\_A.

**Table 3-4. ADC Path Characteristics**

Test conditions (unless specified otherwise): External components as shown in Fig. 2-1; VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C; 1 kHz sine wave test signal; F<sub>s</sub> = 48 kHz, 32-bit audio data, MCLK = 24.576 MHz (PLL bypass).

Parameter		Min	Typ	Max	Units
Input resistance (INnP to INnN)	Mid impedance (INxx_HIZ = 0)	—	3	—	kΩ
	High impedance (INxx_HIZ = 1)	—	100	—	kΩ
Full-scale input signal level <sup>1</sup>	0 dBFS output	—	2.0	—	V <sub>RMS</sub>
SNR	A-weighted	120	123	—	dB
	unweighted	117	120	—	dB
Dynamic range <sup>2</sup>	A-weighted	—	123	—	dB
	unweighted	—	120	—	dB
Dynamic range—ADC input summing <sup>2,3</sup>	A-weighted, 2-channel output	—	126	—	dB
	A-weighted, 1-channel output	—	129	—	dB
THD+N <sup>4</sup>	–1 dBFS output	—	–110	–104	dB
	–20 dBFS output	—	–100	—	dB
	–60 dBFS output	—	–60	—	dB
CMRR	100 mV (peak-peak) 1 kHz	—	80	—	dB
Channel separation		—	110	—	dB
Interchannel phase deviation		—	0.03	—	degree
Interchannel gain deviation		—	0.1	—	dB
Gain drift		—	±100	—	ppm/°C
PSRR (VDD_A)	100 mV (peak-peak) 1 kHz sine wave	—	65	—	dB

1. The full-scale input signal level is also the maximum analog input level, before clipping occurs. A sinusoidal input signal is assumed.

Full-scale input signal level scales with VDD\_A.

2. Dynamic range is derived by measuring the performance including the input buffer, and then deducting the contribution from the input buffer.

3. ADC input summing is described in Section 4.5.5.

4. Includes contribution from the input buffer circuit.

**Table 3-5. ADC Filter Characteristics**

Test conditions (unless specified otherwise): VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C; 1 kHz sine wave test signal, 32-bit audio data.

		Parameter	Min	Typ	Max	Units	
Fs = 32 kHz	Fast roll-off	Passband	to -3 dB corner	—	—	0.47	Fs
		Passband ripple	f ≤ 0.45 Fs	-0.092	—	0.092	dB
		Stopband attenuation	f ≥ 0.55 Fs	98	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	20.5/Fs 4.1/Fs	— —	s s
Fs = 44.1 or 48 kHz	Fast roll-off	Passband	to -3 dB corner	—	—	0.48	Fs
		Passband ripple	f ≤ 0.46 Fs	-0.011	—	0.011	dB
		Stopband attenuation	f ≥ 0.54 Fs	98	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	27.6/Fs 4.0/Fs	— —	s s
	Slow roll-off	Passband	to -3 dB corner	—	—	0.46	Fs
		Passband ripple	f ≤ 0.42 Fs	-0.099	—	0.099	dB
		Stopband attenuation	f ≥ 0.58 Fs	96	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	13.3/Fs 3.9/Fs	— —	s s
Fs = 88.2 or 96 kHz	Fast roll-off	Passband	to -3 dB corner	—	—	0.48	Fs
		Passband ripple	f ≤ 0.45 Fs	-0.006	—	0.006	dB
		Stopband attenuation	f ≥ 0.55 Fs	111	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	32.3/Fs 6.3/Fs	— —	s s
	Slow roll-off	Passband	to -3 dB corner	—	—	0.43	Fs
		Passband ripple	f ≤ 0.27 Fs	-0.011	—	0.011	dB
		Stopband attenuation	f ≥ 0.77 Fs	103	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	7.0/Fs 4.1/Fs	— —	s s
Fs = 176.4 or 192 kHz	Fast roll-off	Passband	to -3 dB corner	—	—	0.47	Fs
		Passband ripple	f ≤ 0.43 Fs	-0.009	—	0.009	dB
		Stopband attenuation	f ≥ 0.57 Fs	99	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	19.1/Fs 5.2/Fs	— —	s s
	Slow roll-off	Passband	to -3 dB corner	—	—	0.29	Fs
		Passband ripple	f ≤ 0.12 Fs	-0.010	—	0.010	dB
		Stopband attenuation	f ≥ 0.67 Fs	99	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	6.4/Fs 4.2/Fs	— —	s s
Fs = 352.8 or 384 kHz	Fast roll-off	Passband	to -3 dB corner	—	—	0.48	Fs
		Passband ripple	f ≤ 0.43 Fs	-0.010	—	0.010	dB
		Stopband attenuation	f ≥ 0.57 Fs	100	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	23.8/Fs 7.5/Fs	— —	s s
	Slow roll-off	Passband	to -3 dB corner	—	—	0.34	Fs
		Passband ripple	f ≤ 0.06 Fs	-0.001	—	0.001	dB
		Stopband attenuation	f ≥ 0.94 Fs	129	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	5.8/Fs 4.7/Fs	— —	s s
Fs = 705.6 or 768 kHz	Fast roll-off	Passband	to -3 dB corner	—	—	0.38	Fs
		Passband ripple	f ≤ 0.22 Fs	-0.009	—	0.009	dB
		Stopband attenuation	f ≥ 0.78 Fs	118	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	9.1/Fs 6.4/Fs	— —	s s
	Slow roll-off	Passband	to -3 dB corner	—	—	0.30	Fs
		Passband ripple	f ≤ 0.03 Fs	-0.008	—	0.008	dB
		Stopband attenuation	f ≥ 0.97 Fs	119	—	—	dB
		Group delay <sup>1</sup>	linear phase minimum phase	— —	7.1/Fs 6.2/Fs	— —	s s

1. Group delay is measured from the time at which a signal is presented on the input pins (INnP/INnN) to the time of the first data bit of the corresponding FSYNC frame being output on the ASP\_DOUTn pin.

**Table 3-6. ADC High-Pass Filter (HPF)**

Test conditions (unless specified otherwise): VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C; 1 kHz sine wave test signal; F<sub>s</sub> = 48 kHz, 32-bit audio data.

Parameter		Min	Typ	Max	Units
Passband	-0.01 dB corner	—	19	—	Hz
	-3 dB corner	—	1	—	Hz
Phase deviation	f = 20 Hz	—	0.001	—	degree
Filter settling time		—	0.4	—	s

**Table 3-7. Device Power Consumption**

Test conditions (unless specified otherwise): VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C; 1 kHz sine wave test signal; ASP secondary mode, load capacitance (ASP\_DOUTn) = 20 pF, F<sub>s</sub> = 48 kHz, 32-bit audio data.

Use Configuration		Typical Current (mA)		Total Power (mW)
		I <sub>VDD_A</sub>	I <sub>VDD_IO</sub>	
Reset	RESET = Logic 0	0.39	0.07	1.52
Four channels enabled	Mid impedance (IN <sub>xx_HIZ</sub> = 0)	36.1	2.1	126
	High impedance (IN <sub>xx_HIZ</sub> = 1)	67.5	2.1	230

**Table 3-8. Digital Interface Specifications and Characteristics**

Test conditions (unless specified otherwise): Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C.

Parameter		Symbol	Minimum	Maximum	Unit
Input leakage current (per pin)		I <sub>IN</sub>	—	±10	μA
Input capacitance (per pin)		—	—	5	pF
Digital I/O (VDD_IO logic—all pins except CONFIGx)	High-level output	V <sub>OH</sub>	0.9×VDD_IO	—	V
	Low-level output	V <sub>OL</sub>	—	0.1×VDD_IO	V
	High-level input	V <sub>IH</sub>	0.7×VDD_IO	—	V
	Low-level input	V <sub>IL</sub>	—	0.3×VDD_IO	V
Digital I/O (VDD_A logic—CONFIGx pins 1)	High-level output	V <sub>OH</sub>	0.9×VDD_A	—	V
	Low-level output	V <sub>OL</sub>	—	0.1×VDD_A	V


1. The CONFIGx pins are configured as digital output if HGC\_SPI\_EN is set; this is used to support the hybrid gain control (see Section 4.5.4). The CONFIGx pins also support digital output if configured as GP output (see Section 4.9).

**Table 3-9. DC Characteristics**

Test conditions (unless specified otherwise): VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C.

Parameter		Minimum	Typical	Maximum	Unit
ADC_FILT	Nominal voltage	—	3.3	—	V
ADC_VMID 1,2	Nominal voltage	—	1.65	—	V
	Maximum output current	—	0.01	—	mA
VDD_A power-on reset (POR) threshold (V <sub>POR</sub> )	VDD_A rising	1.9	—	2.7	V
	VDD_A falling	1.8	—	2.6	V
VDD_D power-on reset (POR) threshold (V <sub>POR</sub> )	VDD_D rising	0.90	—	1.05	V
	VDD_D falling	0.75	—	0.90	V

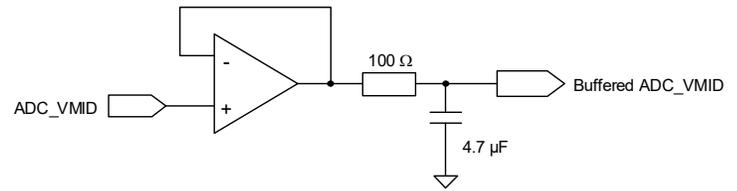1. The output current (arising from capacitor leakage and the input-buffer circuit) must be less than the maximum output current of the ADC\_VMID pin. If a larger current is required, an external VMID buffer should be used. A buffer can be provided using a standard op-amp (noise voltage < 5 nV/√Hz, input current < 10 μA). An example circuit is as follows:



2. If mid-impedance input is selected, the VMID reference used by the input buffer must be provided using external components as shown in Fig. 2-2.

**Table 3-10. Switching Specifications—Reset and Clock References**

Test conditions (unless specified otherwise): VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; T<sub>A</sub> = +25°C.

Parameter		Symbol	Minimum	Typical	Maximum	Unit	
Reset	RESET low (logic 0) pulse width	t <sub>RLPW</sub>	1	—	—	ms	
	RESET rising edge to control port active	t <sub>IRS</sub>	—	—	5	ms	
MCLK input	MCLK frequency (MCLK as clock source, PLL not used)	f <sub>MCLK</sub>	—	22.5792 24.576	—	MHz MHz	
	MCLK duty cycle (MCLK as clock source, PLL not used)	D <sub>MCLK</sub>	40	—	60	%	
	MCLK frequency tolerance (MCLK as clock source, PLL not used)	—	-1	—	1	%	
Phase-locked loop (PLL)	REFCLK input frequency (BCLK or MCLK reference) <sup>1</sup>	f <sub>REFCLK</sub>	—	2.8224 5.6448 11.2896 22.5792 3.072 6.144 12.288 24.576	—	MHz MHz MHz MHz MHz MHz MHz MHz	
		REFCLK input duty cycle	D <sub>REFCLK</sub>	45	—	55	%
		REFCLK frequency tolerance	—	-1	—	1	%
		PLL output frequency	f <sub>PLL_OUT</sub>	—	24.576 22.5792	—	MHz MHz
			F <sub>s</sub> = 32, 48, 96, 192, 384, 768 kHz F <sub>s</sub> = 44.1, 88.2, 176.4, 352.8, 705.6 kHz	—	—	—	—
		PLL output jitter	j <sub>PLL_OUT</sub>	—	500	—	psRMS
		PLL lock time	t <sub>PLL_LOCK</sub>	—	0.3	1	ms

1. Note the REFCLK input frequency must be integer-related to the sample rate. See Section 4.4 for further details.

**Table 3-11. Switching Specifications—Audio Serial Port (ASP)**

Test conditions (unless specified otherwise): VDD\_A = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; input timings are measured at V<sub>IL</sub> and V<sub>IH</sub> thresholds, output timings are measured at V<sub>OL</sub> and V<sub>OH</sub> thresholds for VDD\_IO logic (as specified in Table 3-8); T<sub>A</sub> = 25°C.

Parameter 1,2,3,4,5		Symbol	Minimum	Maximum	Unit	
Secondary Mode, VDD_IO = 3.3 V	ASP_FSYNC input sample/frame rate	F <sub>s</sub>	32	768	kHz	
	ASP_FSYNC pulse width	t <sub>HI:FSYNC</sub>	1/f <sub>ASP_BCLK</sub>	—	ns	
	ASP_BCLK frequency	f <sub>BCLK</sub>	2.048	24.576	MHz	
	ASP_BCLK high period	t <sub>HI:BCLK</sub>	18	—	ns	
	ASP_BCLK low period	t <sub>LO:BCLK</sub>	18	—	ns	
	ASP_FSYNC setup time before ASP_BCLK latching edge	t <sub>SU:FSYNC</sub>	5	—	ns	
	ASP_FSYNC hold time after ASP_BCLK latching edge	t <sub>H:FSYNC</sub>	5	—	ns	
	ASP_DOUT delay after ASP_BCLK launching edge	t <sub>D:BCLK-DOUT</sub>	half-cycle mode, load = 50 pF	0	10	ns
	ASP_DOUT delay after ASP_BCLK launching edge		full-cycle mode, load = 150 pF	0	12	ns
	ASP_DOUT Hi-Z delay after ASP_BCLK latching edge	t <sub>DLY:HIZ</sub>	half-cycle mode, load = 50 pF	0	9	ns
	ASP_DOUT Hi-Z delay after ASP_BCLK latching edge		full-cycle mode, load = 150 pF	0	9	ns
	ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge	t <sub>DLY:EN</sub>	half-cycle mode, load = 50 pF	0	10	ns
ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge	full-cycle mode, load = 150 pF		10	28	ns	
ASP_x load capacitance	ASP_DOUTx	—	0	150	pF	
Primary Mode, VDD_IO = 3.3 V	ASP_FSYNC output sample/frame rate	F <sub>s</sub>	32	768	kHz	
	ASP_BCLK frequency	f <sub>BCLK</sub>	2.8224	24.576	MHz	
	ASP_BCLK duty cycle	D <sub>BCLK</sub>	PLL enabled, MCLK duty cycle 40–60%	45	55	%
			PLL bypass, BCLK < 22.5792 MHz, MCLK 40–60%	45	55	%
			PLL bypass, BCLK ≥ 22.5792 MHz, MCLK 45–55%	42	58	%
			PLL bypass, BCLK ≥ 22.5792 MHz, MCLK 40–60%	37	63	%
	ASP_FSYNC delay time after ASP_BCLK launching edge	t <sub>D:BCLK-FSYNC</sub>	0	20	ns	
	ASP_DOUT delay after ASP_BCLK launching edge	t <sub>D:BCLK-DOUT</sub>	half-cycle mode, load = 50 pF	0	11	ns
	ASP_DOUT delay after ASP_BCLK launching edge		full-cycle mode, load = 150 pF	0	13	ns
	ASP_DOUT Hi-Z delay after ASP_BCLK latching edge	t <sub>DLY:HIZ</sub>	half-cycle mode, load = 50 pF	0	10	ns
ASP_DOUT Hi-Z delay after ASP_BCLK latching edge	full-cycle mode, load = 150 pF		0	10	ns	
ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge	t <sub>DLY:EN</sub>	half-cycle mode, load = 50 pF	0	15	ns	
ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge		full-cycle mode, load = 150 pF	7	28	ns	
ASP_x load capacitance	ASP_BCLK	—	0	50	pF	
	ASP_FSYNC		0	50	pF	
	ASP_DOUTx		0	150	pF	
Secondary Mode, VDD_IO = 1.8 V	ASP_FSYNC input sample/frame rate	F <sub>s</sub>	32	768	kHz	
	ASP_FSYNC pulse width	t <sub>HI:FSYNC</sub>	1/f <sub>ASP_BCLK</sub>	—	ns	
	ASP_BCLK frequency	f <sub>BCLK</sub>	2.048	24.576	MHz	
	ASP_BCLK high period	t <sub>HI:BCLK</sub>	18	—	ns	
	ASP_BCLK low period	t <sub>LO:BCLK</sub>	18	—	ns	
	ASP_FSYNC setup time before ASP_BCLK latching edge	t <sub>SU:FSYNC</sub>	5	—	ns	
	ASP_FSYNC hold time after ASP_BCLK latching edge	t <sub>H:FSYNC</sub>	5	—	ns	
	ASP_DOUT delay after ASP_BCLK launching edge	t <sub>D:BCLK-DOUT</sub>	half-cycle mode, load = 50 pF	0	15	ns
	ASP_DOUT delay after ASP_BCLK launching edge		full-cycle mode, load = 150 pF	0	17	ns
	ASP_DOUT Hi-Z delay after ASP_BCLK latching edge	t <sub>DLY:HIZ</sub>	half-cycle mode, load = 50 pF	0	12	ns
	ASP_DOUT Hi-Z delay after ASP_BCLK latching edge		full-cycle mode, load = 150 pF	0	12	ns
	ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge	t <sub>DLY:EN</sub>	half-cycle mode, load = 50 pF	0	15	ns
ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge	full-cycle mode, load = 150 pF		11	33	ns	
ASP_x load capacitance	ASP_DOUTx	—	0	150	pF	


**Table 3-11. Switching Specifications—Audio Serial Port (ASP) (Cont.)**

Test conditions (unless specified otherwise): VDD\_A = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; input timings are measured at V<sub>IL</sub> and V<sub>IH</sub> thresholds, output timings are measured at V<sub>OL</sub> and V<sub>OH</sub> thresholds for VDD\_IO logic (as specified in Table 3-8); T<sub>A</sub> = 25°C.


Parameter 1,2,3,4,5		Symbol	Minimum	Maximum	Unit	
Primary Mode, VDD_IO = 1.8 V	ASP_FSYNC output sample/frame rate	F <sub>s</sub>	32	768	kHz	
	ASP_BCLK frequency	f <sub>BCLK</sub>	2.8224	24.576	MHz	
	ASP_BCLK duty cycle	PLL enabled, MCLK duty cycle 40–60%	D <sub>BCLK</sub>	45	55	%
		PLL bypass, BCLK < 22.5792 MHz, MCLK 40–60%		45	55	%
		PLL bypass, BCLK ≥ 22.5792 MHz, MCLK 45–55%		39	61	%
		PLL bypass, BCLK ≥ 22.5792 MHz, MCLK 40–60%		34	66	%
	ASP_FSYNC delay time after ASP_BCLK launching edge	t <sub>D:BCLK-FSYNC</sub>	0	20	ns	
	ASP_DOUT delay after ASP_BCLK launching edge	half-cycle mode, load = 50 pF	t <sub>D:BCLK-DOUT</sub>	0	16	ns
		full-cycle mode, load = 150 pF		0	18	ns
ASP_DOUT Hi-Z delay after ASP_BCLK latching edge	half-cycle mode, load = 50 pF	t <sub>DLY:HiZ</sub>	0	13	ns	
	full-cycle mode, load = 150 pF		0	13	ns	
ASP_DOUT delay from Hi-Z after ASP_BCLK launching edge	half-cycle mode, load = 50 pF	t <sub>DLY:EN</sub>	0	15	ns	
	full-cycle mode, load = 150 pF		7	34	ns	
ASP_x load capacitance	ASP_BCLK	—	0	50	pF	
	ASP_FSYNC	—	0	50	pF	
	ASP_DOUTx	—	0	150	pF	

1. The ASP\_BCLK launching edge is selectable. Half-cycle mode = ASP\_BCLK launching edge is opposite to latching edge. Full-cycle mode = ASP\_BCLK launching edge is same as latching edge.

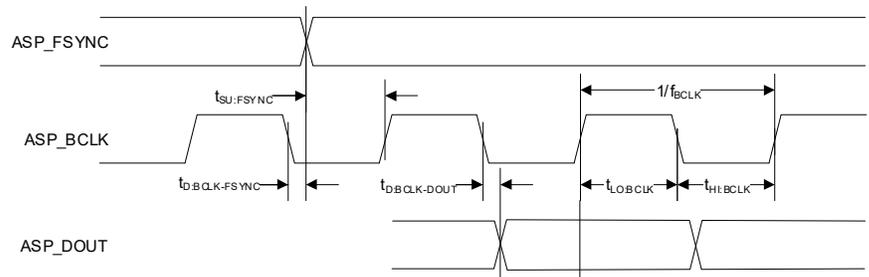
2. ASP timing in I<sup>2</sup>S and Left-Justified Modes  
 Note that ASP\_BCLK can be inverted if required; the figure shows the default polarity in half-cycle mode.



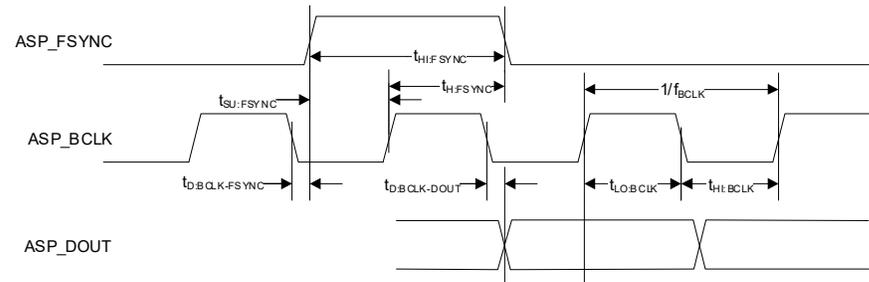
3. ASP timing in TDM Mode  
 Note that ASP\_BCLK can be inverted if required; the figure shows the default polarity in half-cycle mode.



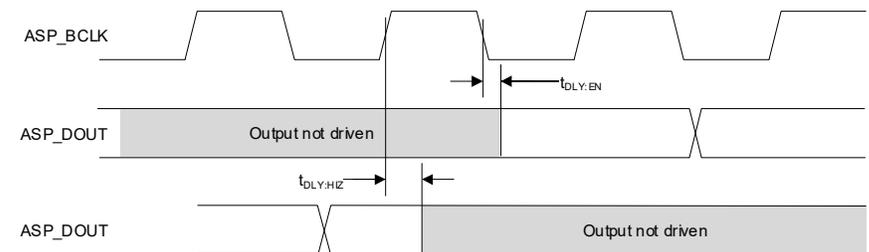4. ASP\_DOUT timing for multiple devices sharing the audio serial port bus—half-cycle mode.



5. ASP\_DOUT timing for multiple devices sharing the audio serial port bus—full-cycle mode.

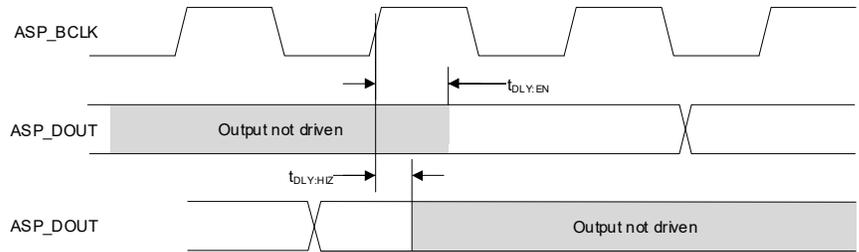


**Table 3-12. Switching Specifications—I<sup>2</sup>C Control Port**

Test conditions (unless specified otherwise): VDD\_A = 3.3 V; VDD\_IO = 1.71–3.63 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; input timings are measured at V<sub>IL</sub> and V<sub>IH</sub> thresholds, output timings are measured at V<sub>OL</sub> and V<sub>OH</sub> thresholds for VDD\_IO logic (as specified in Table 3-8); T<sub>A</sub> = 25°C.

Parameter <sup>1,2</sup>	Symbol	Minimum	Maximum	Unit	
SCL clock frequency	f <sub>SCL</sub>	—	1000	kHz	
Clock low time	t <sub>LOW</sub>	500	—	ns	
Clock high time	t <sub>HIGH</sub>	260	—	ns	
Start condition hold time (before first clock pulse)	t <sub>HDST</sub>	260	—	ns	
Setup time for repeated start	t <sub>SUST</sub>	260	—	ns	
Rise time of SCL and SDA	f <sub>SCL</sub> ≤ 100 kHz	t <sub>RC</sub>	600	1000	ns
	100 kHz < f <sub>SCL</sub> ≤ 400 kHz		180	300	ns
	400 kHz < f <sub>SCL</sub> ≤ 1000 kHz		72	120	ns
Fall time of SCL and SDA	f <sub>SCL</sub> ≤ 100 kHz	t <sub>FC</sub>	6.5	300	ns
	100 kHz < f <sub>SCL</sub> ≤ 400 kHz		6.5	300	ns
	400 kHz < f <sub>SCL</sub> ≤ 1000 kHz		6.5	120	ns
Rise time variation between SDA and SCL	—	—	1.67	x	
Fall time variation between SDA and SCL	f <sub>SCL</sub> ≤ 100 kHz	—	—	100	ns
	100 kHz < f <sub>SCL</sub> ≤ 400 kHz	—	—	100	ns
	400 kHz < f <sub>SCL</sub> ≤ 1000 kHz	—	—	75	ns
Setup time for stop condition	t <sub>SUSP</sub>	260	—	ns	
SDA setup time to SCL rising	t <sub>SUD</sub>	50	—	ns	
SDA input hold time from SCL falling <sup>3</sup>	t <sub>HDDI</sub>	0	—	ns	
Output data valid (Data/ACK) <sup>4</sup>	f <sub>SCL</sub> ≤ 100 kHz	t <sub>VDDO</sub>	—	3450	ns
	100 kHz < f <sub>SCL</sub> ≤ 400 kHz		—	900	ns
	400 kHz < f <sub>SCL</sub> ≤ 1000 kHz		—	450	ns
Bus free time between transmissions	t <sub>BUF</sub>	500	—	ns	
SDA bus capacitance	C <sub>B</sub>	—	550	pF	
SCL/SDA pull-up resistance	R <sub>P</sub>	500	—	Ω	
Pulse width of spikes to be suppressed	t <sub>ps</sub>	0	50	ns	

1. All timing is relative to thresholds specified in Table 3-8, V<sub>IL</sub> and V<sub>IH</sub> for input signals, and V<sub>OL</sub> and V<sub>OH</sub> for output signals.

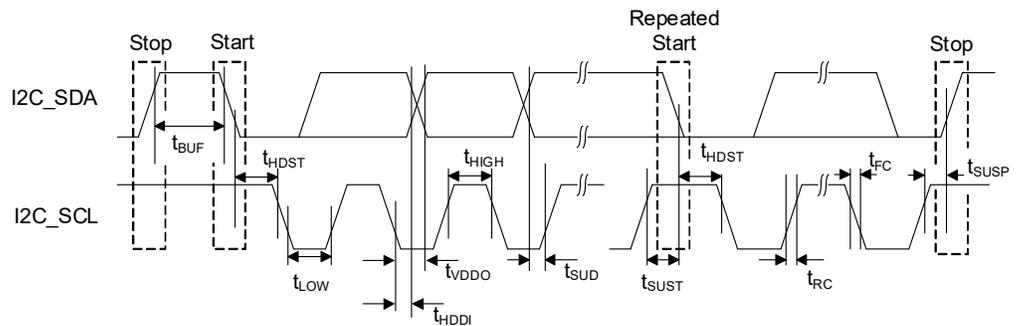2. I<sup>2</sup>C control-port timing.



3. Data must be held long enough to bridge the transition time, t<sub>FC</sub>, of SCL.


4. Time from falling edge of SCL until data output is valid.

**Table 3-13. Switching Specifications—SPI Control Port**

Test conditions (unless specified otherwise): VDD\_A = 3.3 V; VDD\_IO = 1.71–3.63 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; input timings are measured at V<sub>IL</sub> and V<sub>IH</sub> thresholds, output timings are measured at V<sub>OL</sub> and V<sub>OH</sub> thresholds for VDD\_IO logic (as specified in Table 3-8); T<sub>A</sub> = 25°C.

Parameter <sup>1</sup>	Symbol	Minimum	Maximum	Unit
SPI_SCK frequency	f <sub>SCY</sub>	—	24	MHz
SPI_CS falling edge to SPI_SCK rising edge	t <sub>SSU</sub>	5	—	ns
SPI_SCK falling edge to SPI_CS rising edge	t <sub>SHO</sub>	0.5	—	ns
SPI_SCK pulse width low	t <sub>SCL</sub>	18.5	—	ns
SPI_SCK pulse width high	t <sub>SCH</sub>	18.5	—	ns
SPI_SDI to SPI_SCK setup time	t <sub>DSU</sub>	5	—	ns
SPI_SDI to SPI_SCK hold time	t <sub>DHO</sub>	2.5	—	ns
SPI_SCK falling edge to SPI_SDO transition	t <sub>DL</sub>	0	15	ns
SPI_CS rising edge to SPI_SDO output high-Z	—	0	15	ns
Bus free time between active SPI_CS	t <sub>SH</sub>	20	—	ns

1. SPI control-port timing.

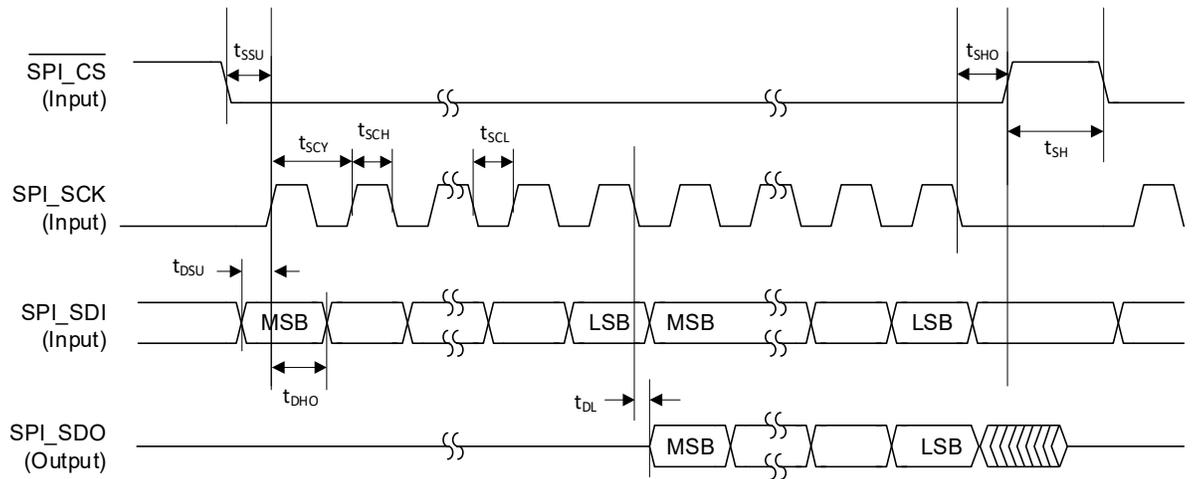


**Table 3-14. Switching Specifications—SPI Controller (Hybrid Gain Control)**


Test conditions (unless specified otherwise): VDD\_A = VDD\_IO = 3.3 V; VDD\_D = 1.2 V (powered from internal LDO); Ground = GND = GND\_A = GND\_D = 0 V; voltages are with respect to ground; output timings are measured at V<sub>OL</sub> and V<sub>OH</sub> thresholds for VDD\_A logic (as specified in Table 3-8); T<sub>A</sub> = 25°C.

Parameter <sup>1,2</sup>	Symbol	Minimum	Maximum	Unit
HGC_SCK frequency	f <sub>SCY</sub>	—	12.288	MHz
HGC_CS falling edge to HGC_SCK rising edge	t <sub>CSU</sub>	30	—	ns
HGC_SCK falling edge to HGC_CS rising edge	t <sub>CHO</sub>	30	—	ns
HGC_SCK pulse width low	t <sub>SCL</sub>	40	—	ns
HGC_SCK pulse width high	t <sub>SCH</sub>	40	—	ns
HGC_SCK falling edge to HGC_SDO transition	t <sub>DL</sub>	-15	15	ns
		C <sub>LOAD</sub> (HGC_SDO) = 30 pF		
		C <sub>LOAD</sub> (HGC_SDO) = 60 pF		ns

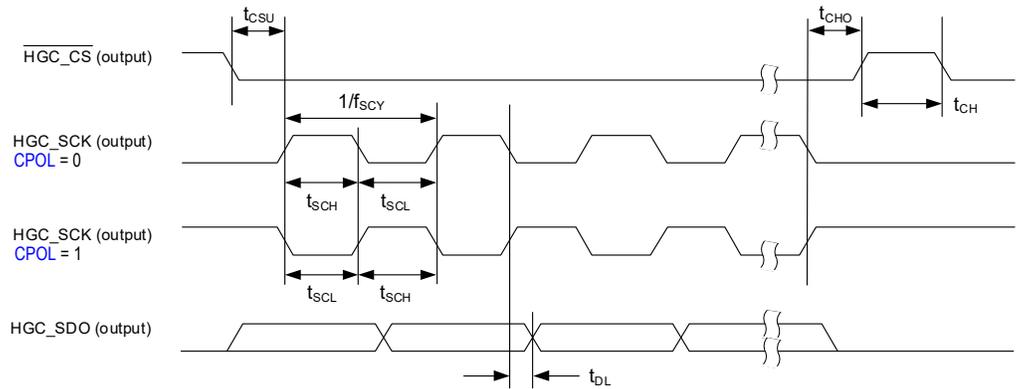1. SPI Controller timing, C<sub>PHA</sub> = 0.



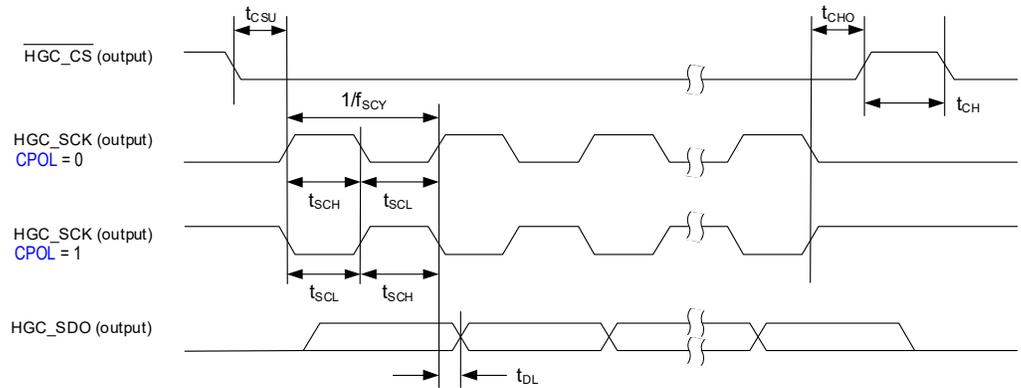2. SPI Controller timing, C<sub>PHA</sub> = 1.



## 4 Functional Description

### 4.1 Device Power and Reset

The CS5304P is powered using VDD\_A1, VDD\_A2, VDD\_D, and VDD\_IO external supplies.

**Notes:** The VDD\_A1 and VDD\_A2 rails should be tied together and powered from a single supply. The associated power domain is referred to as VDD\_A.

The digital supply, VDD\_D, is powered from an internal LDO regulator. The output of the LDO regulator is provided on the LDO\_D\_FILT pin—the VDD\_D pin should be connected to LDO\_D\_FILT.

There are no power-sequencing requirements—supplies can be enabled in any order.

The CS5304P is in reset if the  $\overline{\text{RESET}}$  pin is asserted (Logic 0), or if the VDD\_A or VDD\_D supply is below the respective reset threshold defined in [Table 3-9](#).

All ground pins, including the ground paddle, must be tied to a common ground plane directly underneath the CS5304P.

### 4.2 Hardware Configuration

The CS5304P supports hardware and software control modes. In hardware mode, the device configuration is determined entirely by external resistors connected to the hardware-control pins. In software mode, the I<sup>2</sup>C/SPI control port is used to configure the device.

In hardware mode, the audio serial port (ASP) configuration is selected using the CONFIG1 and CONFIG2 pins as described in [Table 4-1](#). See [Section 4.4](#) for more details of the sample-rate selection. See [Section 4.7](#) for more details of the ASP operation.

**Table 4-1. Hardware Control—ASP Configuration**

Pin Name	Pin Configuration		Description
CONFIG1	Pull-up to VDD_A	0 $\Omega$	Software control mode (I <sup>2</sup> C/SPI)
		4.7 k $\Omega$	ASP Primary Mode, 44.1 kHz, 48 kHz sample rate
		22 k $\Omega$	ASP Primary Mode, 88.2 kHz, 96 kHz sample rate
		100 k $\Omega$	ASP Primary Mode, 176.4 kHz, 192 kHz sample rate
	Pull-down to GND_A	100 k $\Omega$	ASP Secondary Mode, 176.4 kHz, 192 kHz sample rate
		22 k $\Omega$	ASP Secondary Mode, 88.2 kHz, 96 kHz sample rate
		4.7 k $\Omega$	ASP Secondary Mode, 44.1 kHz, 48 kHz sample rate
		0 $\Omega$	ASP Secondary Mode, autodetect sample rate <sup>1</sup>
CONFIG2	Pull-up to VDD_A	0 $\Omega$	ASP TDM Mode—minimum time slots <sup>2</sup>
		4.7 k $\Omega$	ASP TDM Mode—maximum time slots <sup>3</sup> , data output on BCLK falling edge (half-cycle mode) <sup>4</sup>
		22 k $\Omega$	ASP TDM Mode—maximum time slots <sup>3</sup> , data output on BCLK rising edge (full-cycle mode) <sup>5</sup>
		100 k $\Omega$	—
	Pull-down to GND_A	100 k $\Omega$	—
		22 k $\Omega$	—
		4.7 k $\Omega$	ASP Left-Justified Mode
		0 $\Omega$	ASP I <sup>2</sup> S Mode

1. Valid sample rates for autodetect are 32, 44.1, 48, 88.2, 96, 176.4, and 192 kHz.

2. The ASP data format is configured to support the minimum number of time slots necessary for the 4-channel CS5304P output.

3. The ASP data format is configured to support the maximum number of time slots for the applicable BCLK rate.

4. Half-cycle mode = ASP\_DOUT launching edge (BCLK falling) is opposite to the receiving-device latching edge (BCLK rising).

5. Full-cycle mode = ASP\_DOUT launching edge (BCLK rising) is same as the receiving-device latching edge.

If the ASP is configured for TDM data format with maximum time slots, the TDM slot selection is determined using the CONFIG3 pin as described in [Table 4-2](#). See [Section 4.7](#) for more details of the ASP TDM modes.

**Table 4-2. Hardware Control—TDM Slot Selection**

Pin Name	Pin Configuration		Description
CONFIG3	Pull-up to VDD_A	0 Ω	Slots 12–15 [1]
		4.7 kΩ	
		22 kΩ	Slots 8–11 [1]
		100 kΩ	
	Pull-down to GND_A	100 kΩ	Slots 4–7 [2]
		22 kΩ	Slots 0–3
4.7 kΩ			
		0 Ω	

1. Slots 8–15 are only valid in 16-slot TDM Mode.

2. Slots 4–7 are only valid in 8-slot or 16-slot TDM Mode.

The ASP channel-ordering configuration is determined using the CONFIG4 pin as described in [Table 4-3](#). See [Section 4.7.5](#) for more details of the ASP reverse channel-order option.

**Table 4-3. Hardware Control—ASP Channel Order**

Pin Name	Pin Configuration		Channel Order
CONFIG4	Pull-up to VDD_A	4.7 kΩ	Default
	Pull-down to GND_A	4.7 kΩ	Reversed

In hardware mode, the digital filter selection is determined using the CONFIG5 pin as described in [Table 4-4](#). See [Section 4.6](#) for more details of the digital filters.

**Table 4-4. Hardware Control—Digital Filter Selection**

Pin Name	Pin Configuration		Description
CONFIG5	Pull-up to VDD_A	0 Ω	Minimum phase, slow roll-off, HPF bypass
		4.7 kΩ	Minimum phase, fast roll-off, HPF bypass
		22 kΩ	Linear phase, slow roll-off, HPF bypass
		100 kΩ	Linear phase, fast roll-off, HPF bypass
	Pull-down to GND_A	100 kΩ	Linear phase, fast roll-off, HPF enabled
		22 kΩ	Linear phase, slow roll-off, HPF enabled
		4.7 kΩ	Minimum phase, fast roll-off, HPF enabled
		0 Ω	Minimum phase, slow roll-off, HPF enabled

In hardware mode, the device configuration is latched when reset is released (either power-on reset or deassertion of the  $\overline{\text{RESET}}$  pin). In hardware mode, the configuration cannot be changed while the device is operational. To update the device configuration, the  $\overline{\text{RESET}}$  pin must be asserted (Logic 0), or the device power cycled, in order to read new settings on the CONFIGx pins.

If software mode is selected (i.e., CONFIG1 is connected to VDD\_A), the ASP configuration and digital-filter selection are controlled by register writes via the applicable control interface. Unused CONFIGx pins should be terminated as described in [Section 1.3](#).

**Notes:** In software mode, the CONFIG2, CONFIG3, and CONFIG4 pins can optionally be used to support the hybrid gain control function (see [Section 4.5.4](#)).

In software mode, the CONFIG5 pin is used to select the I<sup>2</sup>C target address (see [Section 4.8](#)). If the SPI control interface is used, it is recommended to connect the CONFIG5 pin to GND.

### 4.2.1 Control Sequence for Device Start-Up

To ensure correct ADC behavior, additional control requirements must be followed to reset the ADCs. The control sequence in [Table 4-5](#) must be executed after power is initially applied.

**Table 4-5. Control Sequence for Start-Up**

Step	Description
1	Apply power and deassert $\overline{\text{RESET}}$ (Logic 1)
2	Wait 2 ms
3	Assert $\overline{\text{RESET}}$ (Logic 0)
4	Wait 1 ms
5	Deassert $\overline{\text{RESET}}$ (Logic 1)

**Note:** If the  $\overline{\text{RESET}}$  pin cannot be controlled independently, the same effect can be achieved by disabling the VDD\_IO supply to assert  $\overline{\text{RESET}}$ . The  $\overline{\text{RESET}}$  pin must be tied to VDD\_IO in this case.

## 4.3 Software Configuration

Software control mode is enabled if the CONFIG1 pin is connected to VDD\_A. In software control mode, the CS5304P is configured by writing to control registers using the control port.

The control port supports I<sup>2</sup>C and SPI modes of operation; the applicable mode is detected automatically on the respective interface pins. In I<sup>2</sup>C mode, the target address is selectable using the CONFIG5 pin. See [Section 4.8](#) for further details of the I<sup>2</sup>C/SPI control port.

In software control mode, [GLOBAL\\_EN](#) is used as the global control field for enabling/disabling the CS5304P functions. The device should be configured using the applicable control registers before setting [GLOBAL\\_EN](#).

**Note:** The clocking ([Section 4.4](#)) and ASP ([Section 4.7](#)) control registers are only valid on the rising edge of [GLOBAL\\_EN](#). Writing to these registers has no effect at any other time. It is recommended to select the disabled state ([GLOBAL\\_EN](#) = 0) before writing to these registers.

A reset of the CS5304P can be triggered by writing 0x5A to the [SW\\_RESET](#) field. A software reset disables all functions and sets the control registers to their default states.

### 4.3.1 Control Sequences for Device Start-Up

To ensure correct ADC behavior, the [GLOBAL\\_EN](#) bit must be toggled to reset the ADCs. The control sequence in [Table 4-6](#) must be executed each time the [GLOBAL\\_EN](#) bit is used to enable the device.

**Table 4-6. Control Sequence for ADC Reset**

Step	Description
1	Configure the device, including setting the required ADC-enable bits ( <a href="#">INx_ADC_EN</a> )
2	Set <a href="#">GLOBAL_EN</a>
3	Clear <a href="#">GLOBAL_EN</a>
4	Set <a href="#">GLOBAL_EN</a>

If the clocking configuration uses the PLL (i.e., if `SYSCLK_SRC = 1`), a sequence of register writes must be applied to ensure correct PLL behavior. The control sequence in [Table 4-7](#) must be executed after `GLOBAL_EN` is set.

**Note:** After setting `GLOBAL_EN`, a delay of 1 ms (or more) is required before executing the control sequence.

**Table 4-7. Control Sequence for PLL Operation**

Step	Register	Value
1	0x0100	0x003B
2	0x0100	0x0079
3	0x0120	0x001C
4	0x0614	0x007F
5	0x0612	0x7692
6	0x0614	0x003F
7	0x0614	0x007F
8	0x0120	0x0018
9	0x0534	0x0001

## 4.4 System Clocking


Clocking for the CS5304P is provided from the ASP interface (BCLK) or else using the dedicated MCLK input.

In software control mode, the integrated PLL can be used to generate the internal system clock from the external reference. The MCLK signal can be used as a direct clock reference, bypassing the PLL. If BCLK is selected as the clock reference, the PLL is always used and cannot be bypassed.

**Note:** The PLL is not supported in hardware control mode.

In ASP Secondary Mode, the FSYNC input is used to control the ADC sample timing, enabling multiple CS5304P devices to operate synchronously in a system. See [Section 4.7](#) for more details of the ASP.

The clocking architecture is illustrated in [Fig. 4-1](#).

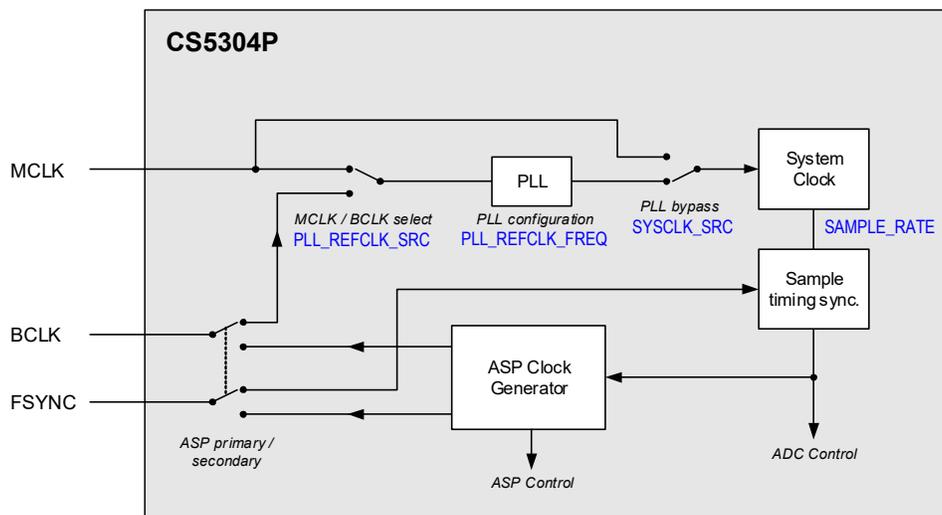

**Figure 4-1. System Clocking**

### 4.4.1 Hardware Control Mode

In hardware control mode, the system clock is provided using the MCLK input. The frequency must be 24.576 MHz (for 48 kHz-related sample rates), or 22.5792 MHz (for 44.1 kHz-related sample rates).

The sample rate is selected using the CONFIG1 pin as described in [Section 4.2](#). Sample rates 44.1 kHz–192 kHz can be configured, or else the autodetect option (32 kHz–192 kHz) automatically configures the device according to the ASP interface clock signals. Note the autodetect sample-rate option is only valid if the ASP is operating in Secondary Mode (see [Section 4.7](#)).

The sample rate must be related to the MCLK input as follows:

- MCLK = 24.576 MHz. Supports sample rates 32, 48, 96, 192 kHz
- MCLK = 22.5792 MHz. Supports sample rates 44.1, 88.2, 176.4 kHz

Note that, if the ASP is configured in Secondary Mode, the external clocks (MCLK, BCLK, and FSYNC) must be derived from a common clock source, i.e., the clocks must be synchronized.

## 4.4.2 Software Control Mode

In software (I<sup>2</sup>C/SPI) control mode, the clocking configuration is selected using the following control fields:

- The sample rate is configured using [SAMPLE\\_RATE](#). Sample rates 32 kHz–768 kHz can be configured, or else the autodetect option automatically configures the device according to the ASP interface clock signals. The sample rate must be related to the system clock reference as described in [Table 4-9](#).

Note that the sample-rate autodetect option is only valid if all the following conditions are met:

- Sample rate is 32 kHz–192 kHz
- The clock reference source is MCLK (with or without PLL)
- ASP is operating in Secondary Mode (see [Section 4.7](#))

- The system clock source is selected using [SYSCLK\\_SRC](#). The clock source can be either MCLK or the output from the PLL. If MCLK is selected (i.e., PLL bypass), the MCLK frequency must be 24.576 MHz (for 48 kHz-related sample rates) or 22.5792 MHz (for 44.1 kHz-related sample rates).
- The input reference to the PLL is selected using [PLL\\_REFCLK\\_SRC](#). The reference can be either MCLK or BCLK. Note the BCLK reference is only valid if the ASP is operating in Secondary Mode.
- The frequency of the PLL input reference is configured using [PLL\\_REFCLK\\_FREQ](#).

If the clocking configuration uses the PLL (i.e., if [SYSCLK\\_SRC](#) = 1), a sequence of register writes must be performed after the device is enabled using [GLOBAL\\_EN](#). See [Section 4.3.1](#) for further details.

If BCLK is configured as the clock source, the BCLK and MCLK pins must be connected together.

The supported clocking configurations are summarized in [Table 4-8](#).

**Table 4-8. System Clock Configuration**

<a href="#">SYSCLK_SRC</a>	<a href="#">PLL_REFCLK_SRC</a>	Description	Reference Frequency	Sample Rate Autodetect Supported
0	X	MCLK reference, PLL bypass	24.576 MHz or 22.5792 MHz	Yes
1	1	MCLK reference, PLL enabled <sup>1</sup>	Configured by <a href="#">PLL_REFCLK_FREQ</a>	Yes
1	0	BCLK reference, PLL enabled <sup>1,2</sup>		No

1. See [Section 4.3.1](#) for start-up control requirements if the PLL is used.

2. If BCLK is configured as the clock source, the BCLK and MCLK pins must be connected together.

The sample rate must be related to the system clock reference as described in [Table 4-9](#).

**Table 4-9. Sample Rate Options**

Reference Frequency (MHz)	PLL_REFCLK_FREQ	Sample Rate (kHz) <sup>1</sup>
2.8224	00	44.1, 88.2, 176.4, 352.8, 705.6
5.6448	01	
11.2896	10	
22.5792	11	
3.072	00	32, 48, 96, 192, 384, 768
6.144	01	
12.288	10	
24.576	11	

1. Sample rate is configured using [SAMPLE\\_RATE](#).

Note that, if MCLK is configured as the clock source (with or without PLL) and the ASP is configured in Secondary Mode, the external clocks (MCLK, BCLK, and FSYNC) must be derived from a common clock source, i.e., the clocks must be synchronized.

## 4.5 ADC and Analog Input

The CS5304P supports four analog input channels, each incorporating a high-performance sigma-delta analog-to-digital converter (ADC). Digital volume and mute control is provided on each input channel.

Note that the digital volume and mute controls are supported in software (I<sup>2</sup>C/SPI) control mode only. In hardware control mode, all channels are enabled with 0 dB gain.

### 4.5.1 ADC Path Enable

The analog input and ADC paths are enabled using [IN<sub>x</sub>\\_ADC\\_EN](#) (where x indicates the channel number 1–4).

**Note:** For each pair of ADC input paths (1–2 or 3–4) both paths must always be configured in the same state (enabled or disabled). For example, input path 1 should not be enabled without also enabling input path 2.

The polarity of the ADC output can be inverted using [IN<sub>x</sub>\\_INV](#) for the respective channel.

The CS5304P supports selectable impedance on the input pins. The mid-impedance option is configured by default. The input pins can be configured high impedance by setting [IN12\\_HIZ](#) or [IN34\\_HIZ](#). Each control bit configures a pair of input channels. Note that power consumption is increased in the high-impedance configuration.

### 4.5.2 Digital Volume and Mute

The ADC signal path incorporates a digital volume control, supporting a gain range of –127.5 dB to 0 dB in 0.5 dB steps. Volume ramping and digital mute is also supported.

The digital volume is configured using [IN<sub>x</sub>\\_VOL](#) for the respective input channel. The digital mute is enabled by setting [IN<sub>x</sub>\\_MUTE](#).

Writing to the volume or mute fields has no effect on the signal path until a 1 is written to [IN\\_VU](#). Writing 1 to [IN\\_VU](#) causes the volume and mute settings to be updated on all input paths simultaneously.

When the volume or mute is changed, the gain of the affected signal paths is ramped up or down to the new setting. For increasing gain, the rate is controlled by [IN\\_RAMP\\_RATE\\_INC](#); for decreasing gain, the rate is controlled by [IN\\_RAMP\\_RATE\\_DEC](#).

**Note:** The [IN\\_RAMP\\_RATE\\_INC](#) and [IN\\_RAMP\\_RATE\\_DEC](#) fields should not be changed while a volume ramp is in progress.

### 4.5.3 Input Clip Warning

The CS5304P provides a clip-warning function on the ADC input paths; this can be used to provide a warning of large or clipped signal levels. The clip warning is indicated using latching status bits, and can also be configured as a logic output on a hardware pin.

The clip-warning threshold level is configured using [IN\\_CLIP\\_THRESH](#). The selected level applies to all input paths.

If an input signal exceeds the clip-warning threshold, the [IN<sub>x</sub>\\_CLIP\\_WARN](#) bit is set (where x indicates the channel number 1–4). These bits are latching fields which, once set, remain set until a 1 is written to the respective bits. These bits can be polled at any time or in response to the logic output signal being asserted.

The clip-warning status can be configured as a logic output on a hardware pin. This is supported on different pins by setting the applicable control bit shown in [Table 4-10](#).

The logic output is active low, i.e., Logic 0 if the clip-warning threshold is exceeded on any input path. The logic output can be either CMOS driven or open drain; this is selected using [CLIP\\_OP\\_CFG](#).

**Table 4-10. Clip Warning Output**

Pin Name	Power Supply 1	Output Enable	Notes
CONFIG4	VDD_A	<a href="#">CONFIG4_CLIP_EN</a>	Clip-warning output is not supported if hybrid gain control (see <a href="#">Section 4.5.4</a> ) is used.
CONFIG3	VDD_IO	<a href="#">CONFIG3_CLIP_EN</a>	
CONFIG2	VDD_IO	<a href="#">CONFIG2_CLIP_EN</a>	
SPI_CS	VDD_IO	<a href="#">SPI_CS_CLIP_EN</a>	Clip-warning output is not supported if the SPI control port (see <a href="#">Section 4.8.2</a> ) is used.
ASP_DOUT4	VDD_IO	<a href="#">ASP_DOUT4_CLIP_EN</a>	Clip-warning output is not supported if the ASP (see <a href="#">Section 4.7</a> ) is configured for 705.6 kHz or 768 kHz sample rate.
ASP_DOUT3	VDD_IO	<a href="#">ASP_DOUT3_CLIP_EN</a>	
ASP_DOUT2	VDD_IO	<a href="#">ASP_DOUT2_CLIP_EN</a>	

1. The digital I/O logic levels for each pin are defined with respect to the applicable power supply. See [Table 3-8](#) for details.


### 4.5.4 Hybrid Gain Control (HGC)

The CS5304P provides the capability to control an external preamplifier (or PGA) associated with the ADC input path. The combination of internal and external gain can be used to optimize the dynamic range of the signal path across a wide range of signal levels.

In typical applications, separate gain stages are provided for analog and digital control of the signal path. The analog stage provides a coarse gain control; the digital stage enables fine adjustment. The CS5304P enables external (analog) and internal (digital) gain adjustments to be fully synchronized across the combined gain range.

A configurable transient-masking function is integrated with the gain-control circuits; this enables seamless gain adjustment by actively suppressing the switching transients often associated with the analog gain selection.

The external PGA is controlled by the CS5304P using a serial interface implemented on the CONFIG pins as shown in [Fig. 4-2](#). Multiple PGAs can be independently controlled in a daisy-chain configuration.

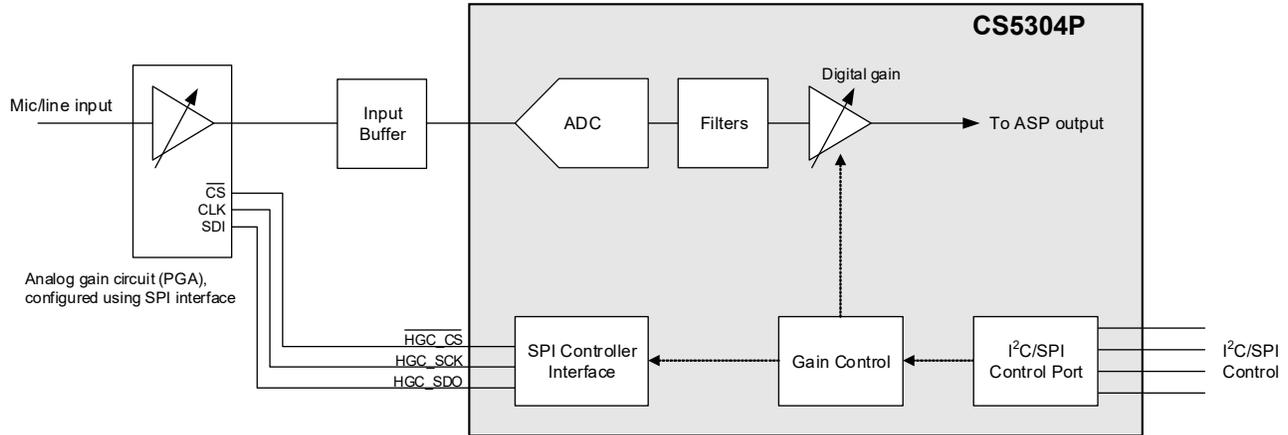

**Figure 4-2. Hybrid Gain Control**

To configure the signal path, the host processor writes control data to the CS5304P, which then forwards the data to the external PGAs using the serial interface. Zero-cross detection is used to synchronize the PGA configuration with the input signal and with the CS5304P digital volume control, ensuring seamless operation across the combined gain range.

Volume ramping is supported on the internal digital volume (see [Section 4.5.2](#)); the volume ramp is coordinated with the external PGA control, enabling smooth transitions across the full range of the internal and external gain selections.

The SPI controller interface can also be used to control auxiliary functions associated with the analog input path (e.g., high-pass filter, pad, or phantom power) using a port expander or similar external IC.

#### 4.5.4.1 SPI Controller Interface Configuration

The SPI controller interface is supported using the CONFIG2, CONFIG3, and CONFIG4 pins, which must be configured for the SPI function if required. The SPI function is enabled using `HGC_SPI_EN`. The interface comprises three connections as follows:

- CONFIG2/HGC\_SCK = Clock output
- CONFIG3/HGC\_SDO = Data output
- CONFIG4/HGC\_CS = Chip select ( $\overline{CS}$ ), active low

**Note:** The SPI interface connections are powered by VDD\_A. The digital I/O levels for these pins are referenced to nominal 3.3 V logic (see [Table 3-8](#)).


The CS5304P configures the analog gain circuits using a bit pattern which is transmitted to each of the connected devices in a daisy-chain manner. The bit pattern is shifted through each of the connected devices, allowing each device to be individually controlled via a shared data interface.

The SPI interface is fully configurable and flexible to support a wide variety of external gain-control implementations. The SPI data definition is not fixed on the CS5304P; the SPI data can be configured to support whatever bit patterns are required in the specific application.

The number of bits associated with each connected device is configured using the `CHx_BIT_PATT_LENGTH` field for the respective audio channel. This field should be set to 0 for any audio channel where there is no associated device to be controlled.

A maximum of two auxiliary devices can also be controlled (e.g., for high-pass filter, pad, or phantom-power selection). The number of bits associated with the auxiliary devices is configured using the respective `AUXx_BIT_PATT_LENGTH` field. This field should be set to 0 if there is no associated device to be controlled.

Typical connections are shown in Fig. 4-3. Note the CS5304P transmits the bit patterns in the sequence AUX2, AUX1, ... CH4, CH2, CH1. The daisy-chain wiring of the external devices must be in the order shown in Fig. 4-3, to ensure each device is configured with its corresponding bit pattern.

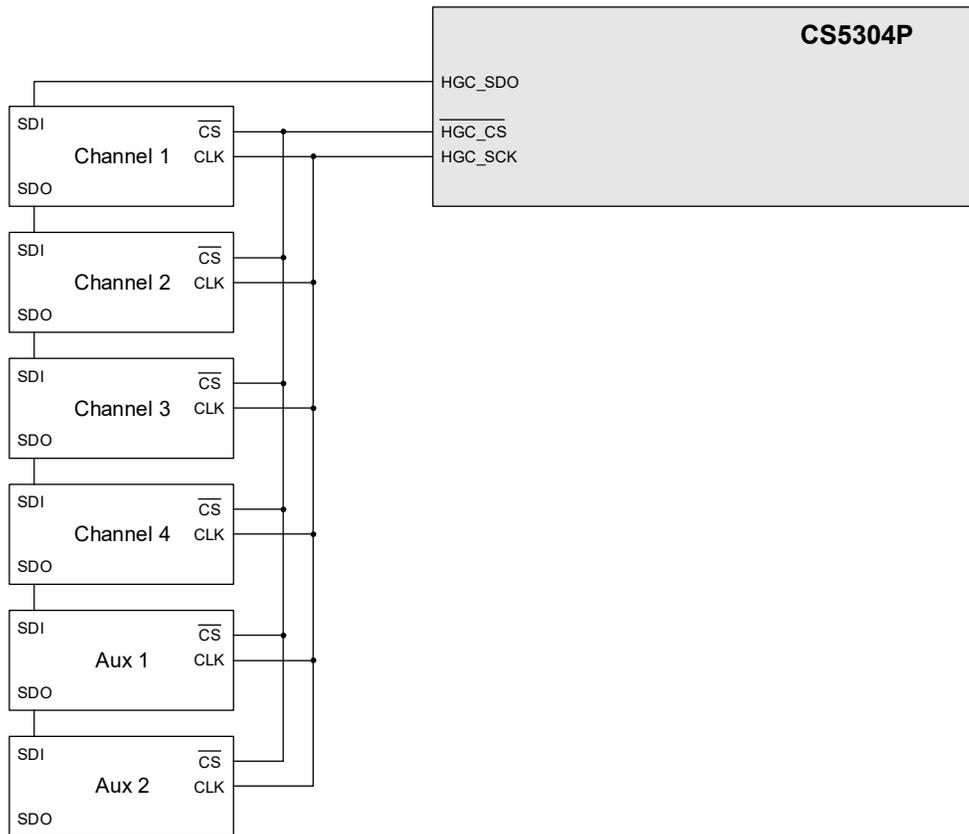

**Figure 4-3. Hybrid Gain Interface Connections**

The SPI controller is configurable to support different timing and signal-polarity options. The **CPOL** bit controls the polarity of the clock output; the **CPHA** bit controls which phase of the clock cycle the data output is valid. See Table 3-14 for timing specifications.

The SPI clock rate is derived as an integer division of the system clock frequency (24.576 MHz for 48 kHz-related sample rates, or 22.5792 MHz for 44.1 kHz-related sample rates). The SPI clock rate is configured using **SCK\_DIV**. The fastest SPI clock rate is 12.288 MHz or 11.2896 MHz, depending on sample rate. Slower clock rates can be used to ensure correct timing of the bus signals in applications where a large load capacitance is connected to the SPI outputs.

The minimum idle period between SPI transactions is configured using **CS\_IDLE\_DUR**. The delay between the falling  $\overline{\text{CS}}$  edge and the first SCK edge is configured using **CS\_FALL\_DELAY**. The minimum delay between the last SCK edge and the rising  $\overline{\text{CS}}$  edge is configured using **CS\_RISE\_DELAY**.

Note that, in normal operation, the timing of the rising  $\overline{\text{CS}}$  edge is controlled by the zero-cross detection; the **CS\_RISE\_DELAY** field determines the minimum delay.

The  $\overline{\text{CS}}$  output is asserted low at the start of each SPI transaction; the SPI controller then transmits the bit patterns for as many audio/aux channels as are configured with a non-zero bit-pattern length. After all the bit patterns have been transmitted,  $\overline{\text{CS}}$  is set high to complete the transaction (see Section 4.5.4.2 for further details on timing).

#### 4.5.4.2 Gain Control Optimization

The CS5304P provides tunable parameters to minimize any audible artifacts when changing the gain configuration.

After a bit pattern has been clocked out to configure the analog gain circuits, the CS5304P waits for a zero-cross detection in the affected audio channel before completing the SPI transaction by deasserting the  $\overline{CS}$  signal. This ensures the gain change is aligned with the zero crossing, on the assumption that deasserting the  $\overline{CS}$  (Logic 1) causes the new gain setting to be applied immediately in the external circuit. A timeout for zero-cross detection is configured using [ZC\\_TIMEOUT](#).

The digital gain for each signal path is controlled internally to the CS5304P. After the analog gain is updated, a delay is applied before updating the digital gain. The delay is used to account for the time difference between the analog gain being updated and the change in signal level reaching the gain-control block. The delay, configured using [DIG\\_GAIN\\_DELAY](#), is used to align the analog and digital gain updates in the audio stream.

The [DIG\\_GAIN\\_DELAY](#) field should be set equal to the sum of the external path delay (analog gain circuit + input buffer) and the ADC filter group delay. The ADC filter characteristics are specified in [Table 3-5](#). The combined delay should be rounded down for the purposes of selecting the nearest [DIG\\_GAIN\\_DELAY](#) option.

A transient-masking function is also available; this is enabled using [TM\\_EN](#). If enabled, the CS5304P repeats one audio sample for the duration of the transient period, masking the artifact arising from the gain change.

The [TM\\_DELAY](#) field defines the time from the analog gain update to the onset of the transient masking. The duration of the masking is configured using [TM\\_HOLD\\_TIME](#).

Transient masking is most effective on low-amplitude signals and is not recommended for larger signals. The CS5304P incorporates a level detector to selectively determine whether the masking should be applied. The transient-masking level detector is enabled on each audio channel using the respective [CHx\\_TM\\_LD\\_EN](#) bit. The level detector calculates the signal level using an exponential moving average (EMA) function; the time constant is configurable using [TM\\_LD\\_TIME](#).

If the level detector is enabled, the threshold for transient masking is configured using [TM\\_LD\\_THRESH](#)—masking is applied if the signal level is below the threshold. If the level detector is disabled, transient masking is applied regardless of the signal level.

#### 4.5.4.3 Audio Channel Gain Control

The host processor configures the analog and digital gain for each audio channel by writing to the respective [CHx\\_ANA\\_GAIN](#) and [CHx\\_DIG\\_GAIN](#) fields. The host also writes the [CHx\\_BIT\\_PATT](#) fields to provide the bit pattern to configure the external device for the required analog gain.

**Note:** The bit pattern is a maximum of 32 bits (the size is configured using [CHx\\_BIT\\_PATT\\_LENGTH](#)). If the bit pattern is 16 bits or less, it is stored in the [CHx\\_BIT\\_PATT\\_1](#) field. The MSB represents the first-transmitted bit of the pattern; one or more of the LSBs may be unused, depending on the size of the bit pattern. If the bit pattern is more than 16 bits, the remaining bits are stored in [CHx\\_BIT\\_PATT\\_0](#).

The analog and digital gain settings do not become effective immediately on updating the control fields. Writing 1 to [CHx\\_UPDATE](#) indicates the settings for the respective audio channel have been updated and are ready to be applied; the CS5304P services each updated channel in turn and applies the respective gain settings at the earliest opportunity. Note that the exact timing varies, dependent on the zero-cross detection for each affected channel.

The [BUSY\\_STS](#) bit, if set, indicates that gain updates are pending for one or more audio channels (i.e., gain settings have been written to the CS5304P, but not yet applied to the respective audio paths). The bit is cleared automatically when all updates have been applied to the respective channels.

Note that the gain settings and bit patterns for each audio channel can be written at any time, regardless of whether an earlier update is currently pending for that channel.

If ADC input summing is enabled (see [Section 4.5.5](#)), the combined paths are configured using the control registers associated with the lowest-numbered ADC in the group. For example, the ADC3+ADC4 group is configured using the IN3/ADC3 control registers. The SPI-controlled gain function is only supported for the lowest-numbered ADC in the group; the bit pattern length ([CHx\\_BIT\\_PATT\\_LENGTH](#)) must be set to 0 for all other input channels in each group.

If an audio channel is enabled, but does not have any associated SPI-controlled external gain circuit, the analog gain and digital gain for the respective channel must be maintained at 0 dB (default).

For efficiency of the host-processor interactions, the [CHx\\_BIT\\_PATT](#), [CHx\\_ANA\\_GAIN](#), and [CHx\\_DIG\\_GAIN](#) fields can be written as a contiguous block (i.e., one auto-incrementing I<sup>2</sup>C/SPI write operation). The [CHx\\_UPDATE](#) bit can be set in the same I<sup>2</sup>C/SPI operation as writing to the corresponding [CHx\\_DIG\\_GAIN](#).

**Note:** If [CHx\\_UPDATE](#) is written 0 when updating the volume/bit-pattern fields, the settings are latched internally but the updates are not applied to the audio path and do not cause the [BUSY\\_STS](#) bit to be set. Writing 0 to [CHx\\_UPDATE](#) is used in the initialization steps described in [Section 4.5.4.6](#). The hybrid gain control must be initialized as described in [Section 4.5.4.6](#) before writing 1 to any of the [CHx\\_UPDATE](#) bits.

#### 4.5.4.4 Gain Ramping Control


The CS5304P supports independent control of the analog (coarse) and digital (fine) gain stages of the input path. When the digital gain is updated, the gain is ramped up or down to the new value; the ramp rate is configurable as described in [Section 4.5.2](#). When the analog gain is updated, the CS5304P uses digital control to provide a ramped response, masking the larger step size of the analog gain.

For example, if the analog gain is increased by 3 dB, the gain step is initially canceled out by decreasing the digital gain by -3 dB. Following this, the digital gain is smoothly ramped up by 3 dB to give the desired overall gain.

Gain ramping is supported for changes in analog gain up to a maximum step size of ±15 dB. Note that the digital adjustment used to cancel the initial analog step is supported using a combination of the digital gain and digital volume functions; this enables support for step changes in analog gain that exceed the ±12 dB digital gain control range.

Note there is no restriction on whether the analog, digital, or both gains are updated in the same operation—the gain ramping is supported for all combinations.

The gain ramping is illustrated in [Fig. 4-4](#). In the example shown, the analog gain is updated from 0 dB to 3 dB. The digital gain is updated from 2 dB to 1 dB. The digital gain is initially set to -1 dB and then ramped to give a smooth transition from 2 dB to 4 dB in the overall (analog + digital) response.

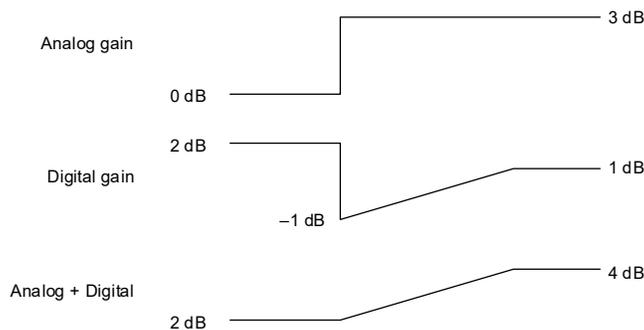

**Figure 4-4. Gain Ramping**

The gain ramping is configurable using [STEP\\_RAMP\\_EN](#). If this bit is set (default), the CS5304P uses a step change in the digital gain to mask the analog gain steps. If this bit is clear, there is no masking of the analog gain steps.

**Note:** If gain ramping is enabled ([STEP\\_RAMP\\_EN](#) = 1), the volume increasing/decreasing ramp rates must be set to nonzero values. See [Section 4.5.2](#) to configure the volume ramp rates.

#### 4.5.4.5 Auxiliary Device Control

The host processor configures the auxiliary devices by writing to the respective `AUXx_BIT_PATT` fields. Each field contains the bit pattern to configure the respective external device as required.

**Note:** The bit pattern is a maximum of 32 bits (the size is configured using `AUXx_BIT_PATT_LENGTH`). If the bit pattern is 16 bits or less, it is stored in the `AUXx_BIT_PATT_1` field. The MSB represents the first-transmitted bit of the pattern; one or more of the LSBs may be unused, depending on the size of the bit pattern. If the bit pattern is more than 16 bits, the remaining bits are stored in `AUXx_BIT_PATT_0`.

If the auxiliary bit patterns are updated, the new settings are latched internally and are not reflected in the SPI data output until a 1 is written to `INIT_UPDATE`. Note that the host processor must confirm that the gain controller is idle (`BUSY_STS = 0`) before writing to `INIT_UPDATE`.

#### 4.5.4.6 Initialization

The hybrid gain controller must be initialized to ensure correct gain-ramping behavior. The host processor should configure the bit patterns, analog gain, and digital gain fields for all channels—writing `CHx_UPDATE = 0` for each audio channel—and then write 1 to `INIT_UPDATE` to transmit the bit patterns and initialize the internal gain-control algorithms. Note that the host processor must confirm that the gain controller is idle (`BUSY_STS = 0`) before writing to `INIT_UPDATE`.

**Note:** There is no zero-cross detection or transient masking when using `INIT_UPDATE`, so audible artifacts may occur. It is recommended to mute all audio channels (using `INx_MUTE`) to suppress any unintended transients.

Writing to `INIT_UPDATE` has no effect if `BUSY_STS = 1`, indicating that gain updates are pending for one or more audio channels. The host processor can cancel any pending gain updates by writing 1 to `ABORT`—this can be used to return the controller to the idle state as quickly as possible, in readiness for initializing the system with a new configuration.

If the `ABORT` bit is written, the CS5304P does not become idle until it has finished applying the updates to the audio channel currently being processed. The host processor must always check the controller is idle (`BUSY_STS = 0`) before writing to `INIT_UPDATE`.

**Note:** Any gain updates that are canceled using the `ABORT` bit may result in an inconsistency between the register map and the respective internal/external gain settings. The `ABORT` bit should only be used as part of a control sequence that also uses `INIT_UPDATE` to apply a new configuration to all channels.

### 4.5.5 ADC Input Summing

The ADC signal paths can be combined in groups of two or four channels; this can be used to achieve enhanced dynamic-range performance on the respective paths.

The ADC input summing is configured using `IN_SUM_MODE`. The supported options are described in [Table 4-11](#).


**Note:** The `IN_SUM_MODE` field should not be changed while `GLOBAL_EN` is set. The `GLOBAL_EN` bit should always be cleared before writing to `IN_SUM_MODE`.

**Table 4-11. ADC Input Summing**

Configuration	Description	Input Summing Configuration
Default	4-channel output	ADC1–ADC4 as individual ADCs
ADCs combined in groups of two	2-channel output	ADC1+ADC2 ADC3+ADC4
ADCs combined as a group of four	1-channel output	ADC1+ADC2+ADC3+ADC4

If the ADC paths are combined, the respective analog input connections must be linked together to provide the same input to each of the respective ADC channels. Typical connections are shown in Fig. 4-5.

The combined ADC paths are configured using the control registers associated with the lowest-numbered ADC in the group. For example, the ADC3+ADC4 group is configured using the IN3/ADC3 control registers.

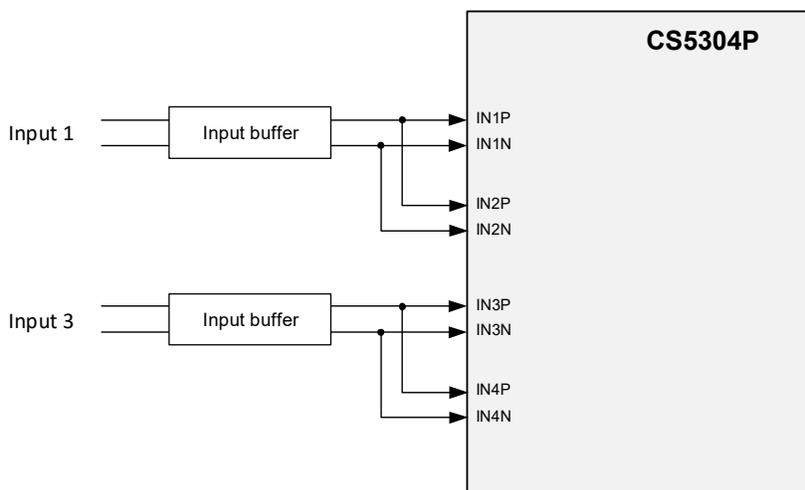

**Figure 4-5. Input Summing**

### 4.5.6 External Components

The analog input channels are supported using external buffer circuits, also incorporating anti-alias filters. A typical buffer circuit is shown in Fig. 2-1; the typical buffer circuit shown produces a full-scale (0 dBFS) output from a 8 V<sub>RMS</sub> differential input.

Note that a common-mode bias must be applied to the input pins; this is typically derived from the VMID reference as shown in Fig. 2-1. Other input-buffer circuit topologies are also possible, including support for single-ended input signals.

The CS5304P input impedance is configurable as described in Section 4.5.1. The design of the input buffer circuit must take account of the applicable input impedance.

- If high-impedance input is selected, the VMID reference used by the input buffer can be provided from the ADC\_ VMID output, as shown in Fig. 2-1.
- If mid-impedance input is selected, the VMID reference used by the input buffer must be provided using external components as shown in Fig. 2-2.
- In hardware control mode, the default (mid-impedance) configuration is selected; in this case, the VMID reference must be connected as shown in Fig. 2-2.

## 4.6 Digital Filter Selection

The ADC input path incorporates a decimation filter and a high-pass filter. Four types of decimation filter are supported:

- Fast roll-off, minimum phase
- Fast roll-off, linear phase
- Slow roll-off, minimum phase
- Slow roll-off, linear phase

The minimum-phase filters offer the lowest latency and an impulse response with no pre-ringing, at the expense of potential in-band phase distortion. The linear-phase filters have no phase distortion, but also higher latency and a symmetric impulse response.

The slow roll-off filters offer the best impulse response and signal clarity across the audio bandwidth, minimizing latency and phase distortion up to 20 kHz. The fast roll-off filters maximize the signal bandwidth (as a function of the selected sample rate), and widen the stop band to a lower minimum frequency.

In hardware control mode, the filter selection is determined by the CONFIG5 pin (see [Section 4.2](#)). In software (I<sup>2</sup>C/SPI) control mode, the decimation filter is selected using `IN_FILTER_SEL`; the high-pass filter is enabled using `IN_HPF_EN`.

Performance plots showing the characteristics of the different filters are shown in [Section 8](#).

## 4.7 Audio Serial Port (ASP)

The multichannel ASP supports the output of digital audio samples from the CS5304P. The ASP can be configured as a primary or secondary interface, and supports I<sup>2</sup>S, left-justified, and TDM data formats. The audio samples can be distributed across four data lines, enabling additional bandwidth and flexibility.

Timing specifications for the ASP are described in [Table 3-11](#). An option is supported to drive the output data (DOUT) on the rising or falling BCLK edge; driving on the rising edge (assuming noninverted BCLK polarity) can be used to support a larger load capacitance by increasing the time between the launching edge from the CS5304P and the sampling edge at the receiving device.

In hardware control mode, the ASP data format is determined by the CONFIGx pins (see [Section 4.2](#)). In software (I<sup>2</sup>C/SPI) control mode, the ASP data format is configured using register fields.


In hardware mode, sample rates 32 kHz–192 kHz are supported. In software mode, the CS5304P supports sample rates 32 kHz–768 kHz.

### 4.7.1 Primary and Secondary Operation


The ASP interface can operate as a primary or secondary interface. In the primary configuration, the BCLK and FSYNC signals are generated by the CS5304P. In the secondary configuration, the BCLK and FSYNC pins are inputs, allowing another device to drive the respective signals.

In hardware control mode, the ASP is configured as a primary or secondary interface using the CONFIG1 pin (see [Section 4.2](#)). In software control mode, the ASP primary/secondary configuration is selected using `ASP_PRIMARY`.

The ASP operation as a primary or secondary interface is illustrated in [Fig. 4-6](#) and [Fig. 4-7](#).

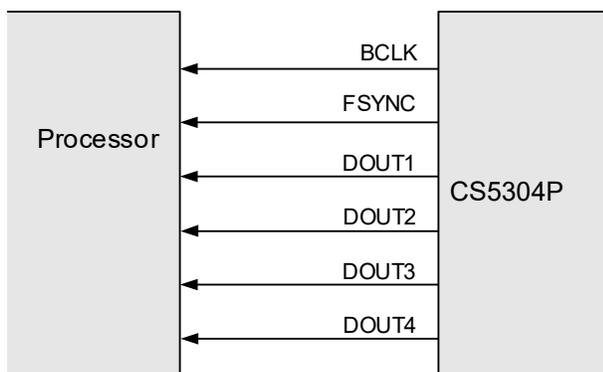

**Figure 4-6. Primary Mode**

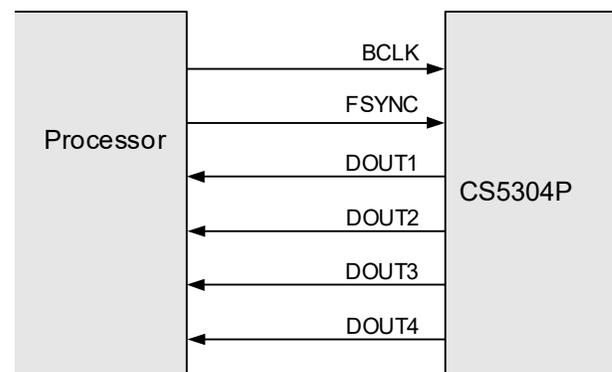


**Figure 4-7. Secondary Mode**

### 4.7.2 ASP Data Formats

The ASP interface can be configured to operate in I<sup>2</sup>S, left-justified, or TDM data formats as illustrated in Fig. 4-8 through Fig. 4-10. The data-bit order is MSB first in each case; data words are encoded in 2's complement (signed, fixed-point) format. Each audio sample is allocated a time slot within the FSYNC frame. Multiple data lines provide capacity to support different audio channels concurrently on different data pins.

- In I<sup>2</sup>S Mode, the MSB is valid on the second BCLK rising edge following a FSYNC transition. The other bits up to the LSB are valid on each successive BCLK cycle. Depending on word length, BCLK frequency, and sample rate, there may be unused BCLK cycles between the LSB of one sample and the MSB of the next.


I<sup>2</sup>S Mode data format is shown in Fig. 4-8.

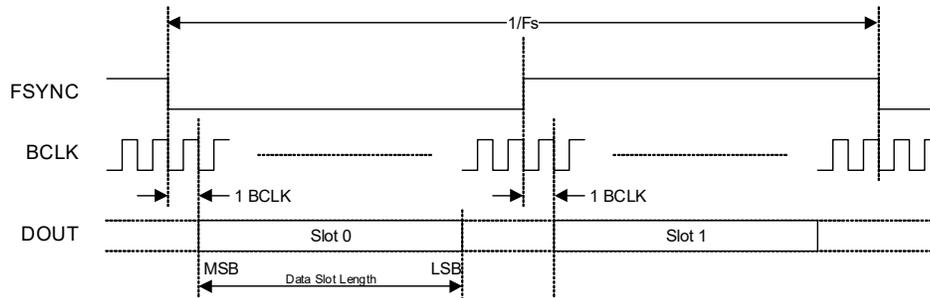

**Figure 4-8. I<sup>2</sup>S Data Format**

- In Left-Justified Mode, the MSB is valid on the first BCLK rising edge following a FSYNC transition. The other bits up to the LSB are valid on each successive BCLK cycle. Depending on word length, BCLK frequency, and sample rate, there may be unused BCLK cycles between the LSB of one sample and the MSB of the next.

Left-Justified Mode data format is shown in Fig. 4-9.

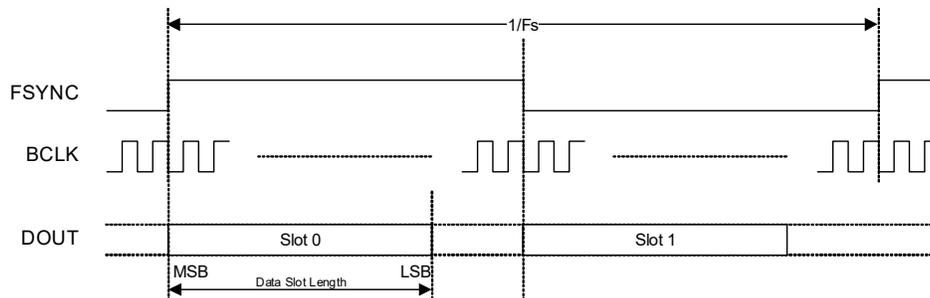


**Figure 4-9. Left-Justified Data Format**

- In TDM modes, the MSB of the first channel is valid on the second BCLK rising edge following the rising FSYNC edge. Subsequent channels follow immediately after the previous one. Depending on word length, BCLK frequency, and sample rate, there may be unused BCLK cycles between the LSB of the last channel data and the start of the next FSYNC frame.

In Primary Mode, the FSYNC output resembles the frame pulse shown in Fig. 4-10. In Secondary Mode, the FSYNC pulse duration can be anything less than  $1/F_s$ , provided the falling edge of the frame pulse occurs at least one BCLK period before the rising edge of the next frame pulse.

TDM Mode data format is shown in Fig. 4-10.

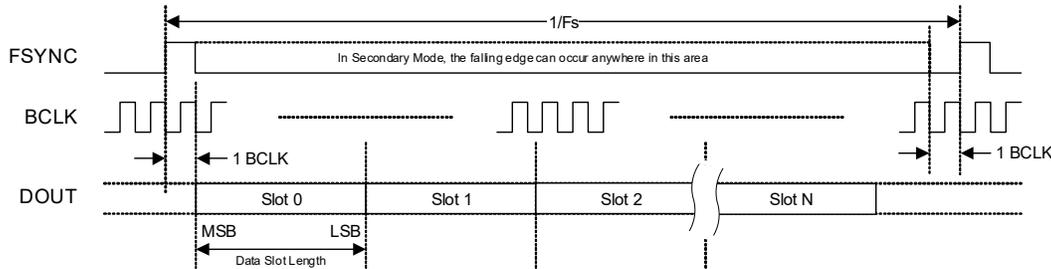

**Figure 4-10. TDM Data Format**


### 4.7.3 ASP Configuration

In hardware control mode, the ASP data format is determined by the CONFIG1 and CONFIG2 pins (see Section 4.2).


In software control mode, the ASP data format is configured using `SAMPLE_RATE` and `ASP_FORMAT`. If ASP Primary Mode is selected (see Section 4.7.1), the BCLK frequency is configured using `ASP_BCLK_FREQ`.

In software control mode, the BCLK polarity is selected using `ASP_BCLK_INV`. The polarity selection is valid in primary and secondary modes, and determines whether the data is valid for sampling on the rising edge or the falling edge.

The BCLK polarity is illustrated in Fig. 4-11 and Fig. 4-12. Note that, in hardware control mode, the BCLK polarity is assumed to be noninverted.

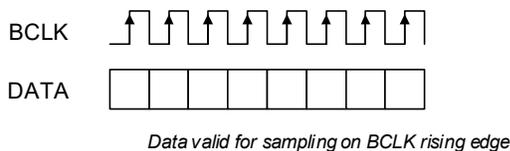

**Figure 4-11. Noninverted BCLK**

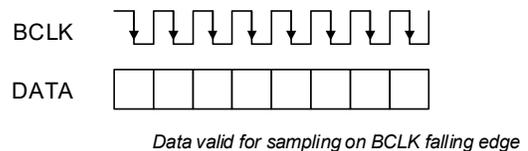

**Figure 4-12. Inverted BCLK**

In TDM Mode, the two data-format options are supported as follows:

- TDM Mode—minimum time slots. The ASP data format is configured to support the minimum number of time slots necessary for the 4-channel CS5304P output. This mode allows the BCLK rate to be as low as possible, equating to a minimum of 32 BCLK cycles per audio sample.
- TDM Mode—maximum time slots. The ASP data format is configured to support the maximum number of time slots for the applicable BCLK rate. The mode is designed for the maximum BCLK rate (22.5792 MHz for 44.1 kHz-related sample rates, or 24.576 MHz for 48 kHz-related sample rates), enabling the maximum possible bandwidth on the ASP data bus to be shared with other devices.

Note that, for sample rates >96 kHz, the TDM data format is the same regardless of the minimum/maximum time-slot option.

If the ASP is configured for TDM Mode with maximum time slots, the output data (DOUT) can be driven either on the rising or falling BCLK edge. Driving on the rising edge (assuming noninverted BCLK polarity) can be used to support a larger load capacitance by increasing the time between the launching edge from the CS5304P and the sampling edge at the receiving device.

Note that the ASP timing options are dependent on the behavior of the receiving device. It is assumed, for noninverted BCLK, the data is sampled on the rising BCLK edge. Similarly, for inverted BCLK, it is assumed the data is sampled on the falling BCLK edge.

The DOUT drive options for half-cycle and full-cycle mode are described in [Table 4-12](#). In full-cycle mode, the output data is driven on the same BCLK edge as it is sampled (i.e., one full BCLK cycle before the sampling edge).

**Table 4-12. TDM Mode (Maximum Time Slots)—DOUT Drive Timing**

TDM Mode <sup>1</sup>	BCLK Polarity <sup>2</sup>	DOUT launching (drive) edge	DOUT latching (sampling) edge
Half-cycle	Noninverted	BCLK falling	BCLK rising
	Inverted	BCLK rising	BCLK falling
Full-cycle	Noninverted	BCLK rising	BCLK rising
	Inverted	BCLK falling	BCLK falling

1. The TDM variant is selected using the CONFIG2 pin (in hardware control mode) or [ASP\\_FORMAT](#) (in software control mode).

2. The BCLK polarity is selected using [ASP\\_BCLK\\_INV](#) in software control mode. In hardware control mode, the polarity is assumed noninverted.

The ASP configuration depends on the sample rate and the selected data format as described in [Table 4-13](#). The output data is provided on one or more ASP\_DOUTx pins, depending on the selected data format.

**Table 4-13. ASP Data Format**

ASP Format <sup>1</sup>	ASP Sample Rate <sup>2,3</sup>	DOUT pins used	Time slots per frame <sup>4</sup>	BCLK <sup>5,6</sup>
I <sup>2</sup> S, Left-Justified	32 kHz	2	2	BCLK ≥ 64 fs <sup>[7]</sup>
	44.1 kHz, 48 kHz	2	2	BCLK ≥ 64 fs
	88.2 kHz, 96 kHz	2	2	BCLK ≥ 64 fs
	176.4 kHz, 192 kHz	2	2	BCLK ≥ 64 fs
	352.8 kHz, 384 kHz	2	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	—	—	—
	Autodetect (32 kHz–192 kHz)	2	2	BCLK ≥ 64 fs
TDM—minimum time slots	32 kHz	1	4	BCLK ≥ 128 fs <sup>[7]</sup>
	44.1 kHz, 48 kHz	1	4	BCLK ≥ 128 fs
	88.2 kHz, 96 kHz	1	4	BCLK ≥ 128 fs
	176.4 kHz, 192 kHz	1	4	BCLK = 128 fs
	352.8 kHz, 384 kHz	2	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	4	1	BCLK = 32 fs
	Autodetect (32 kHz–192 kHz)	1	4	BCLK ≥ 128 fs
TDM—maximum time slots	32 kHz	1	16	BCLK ≥ 512 fs <sup>[7]</sup>
	44.1 kHz, 48 kHz	1	16	BCLK = 512 fs
	88.2 kHz, 96 kHz	1	8	BCLK = 256 fs
	176.4 kHz, 192 kHz	1	4	BCLK = 128 fs
	352.8 kHz, 384 kHz	2	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	4	1	BCLK = 32 fs
	Autodetect (32 kHz–192 kHz)	1	4	BCLK ≥ 128 fs

1. The ASP format is selected using the CONFIG2 pin (in hardware control mode) or [ASP\\_FORMAT](#) (in software control mode).

2. The sample rate is selected using the CONFIG1 pin (in hardware control mode) or [SAMPLE\\_RATE](#) (in software control mode).

3. Sample rates 32 kHz–768 kHz supported in software control mode, 32 kHz–192 kHz in hardware control mode.

4. Time slots per frame is the number of data-sample time slots supported on each of the active DOUT pins.

5. The BCLK rate must be a constant integer multiple of the sample rate (fs).


6. In ASP primary mode (hardware control), the BCLK frequency is the minimum specified rate. In ASP primary mode (software control), the BCLK frequency is configured using [ASP\\_BCLK\\_FREQ](#).

7. In ASP primary mode, the specified minimum BCLK frequency for 32 kHz sample rate is not supported. The available options correspond to 96 fs, 192 fs, 384 fs, or 768 fs.

The ASP data format in I<sup>2</sup>S, Left-Justified, and TDM interface modes as illustrated in Fig. 4-13 through Fig. 4-17. Refer to Table 4-13 for the applicable definition.

- If I<sup>2</sup>S data format is selected, the ASP supports audio channels 1–4 as shown in Fig. 4-13. The minimum BCLK rate is 64 fs (where fs is the sample rate). A higher BCLK frequency can be used, resulting in unused BCLK cycles between the LSB of one sample and the MSB of the next.


Note that the output data is provided on ASP\_DOUT1 and ASP\_DOUT2; the ASP\_DOUT3 and ASP\_DOUT4 pins are not used.

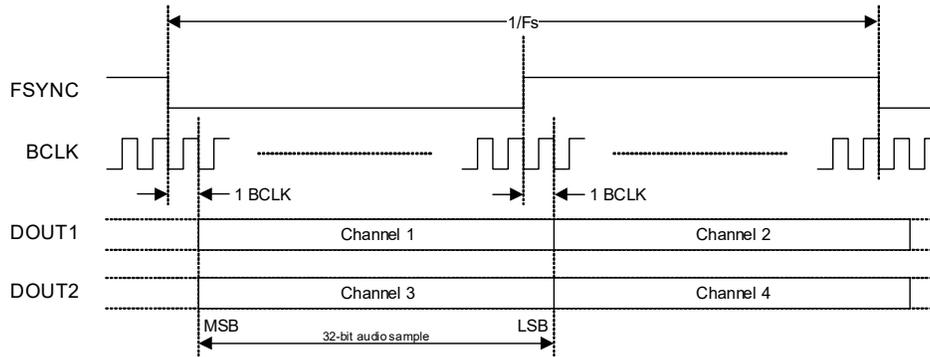

**Figure 4-13. I<sup>2</sup>S Data Format**

- If Left-Justified data format is selected, the ASP supports audio channels 1–4 as shown in Fig. 4-14. The minimum BCLK rate is 64 fs (where fs is the sample rate). A higher BCLK frequency can be used, resulting in unused BCLK cycles between the LSB of one sample and the MSB of the next.

Note that the output data is provided on ASP\_DOUT1 and ASP\_DOUT2; the ASP\_DOUT3 and ASP\_DOUT4 pins are not used.

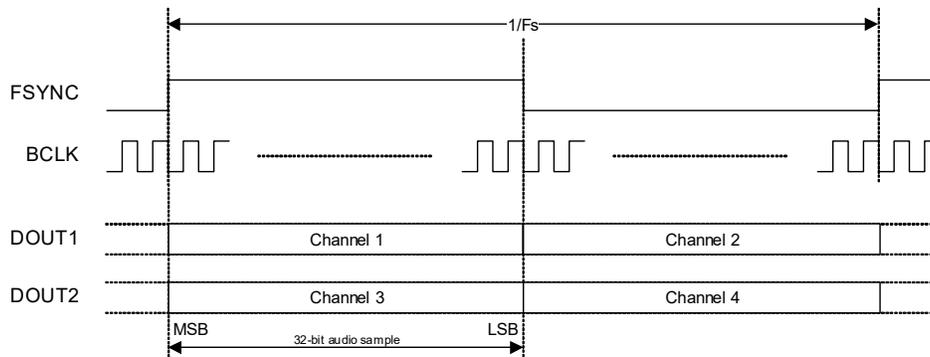

**Figure 4-14. Left-Justified Data Format**


- In TDM Mode, the FSYNC frame is configured for 1, 2, 4, 8, or 16 slots as specified in Table 4-13. In 8- and 16-slot modes, the slot assignment for audio channels 1–4 is selected using the CONFIG3 pin (in hardware control mode—see Section 4.2) or else using ASP\_TDM\_SLOT (in software control mode). In 1-, 2-, and 4-slot modes, the default slot assignment (slots 0–3) should be selected.

The BCLK rate is related to the sample rate (fs) as described in Table 4-13. Where applicable, the BCLK rate can be higher than the stated minimum, resulting in additional unused BCLK cycles between the last slot in the frame and the start of the next frame.

The ASP\_DOUTn pins are high impedance if the CS5304P is not transmitting data, allowing other devices on the bus to transmit data during any unused time slots.

In 4-, 8-, and 16-slot modes, the output data is provided on ASP\_DOUT1; the ASP\_DOUT2, ASP\_DOUT3, and ASP\_DOUT4 pins are not used.


The 8-slot TDM format is shown in Fig. 4-15. In the example shown, audio channels 1–4 occupy TDM slots 0–3 respectively.

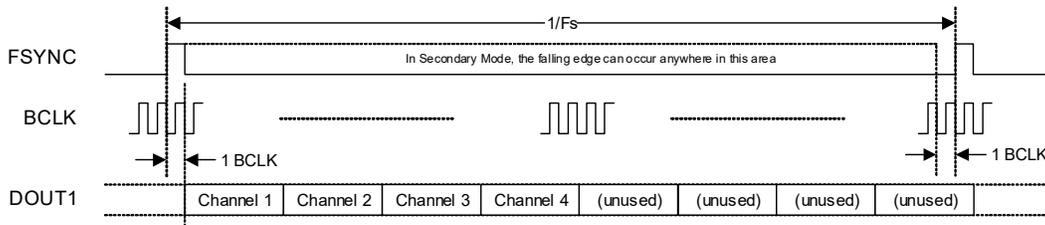

**Figure 4-15. TDM Data Format—1 x DOUT**

In 2-slot mode, the output data is provided on ASP\_DOUT1 and ASP\_DOUT2. Note the 2-slot format is used to support 352.8 kHz and 384 kHz sample rates only.


The 2-slot TDM format is shown in Fig. 4-16.

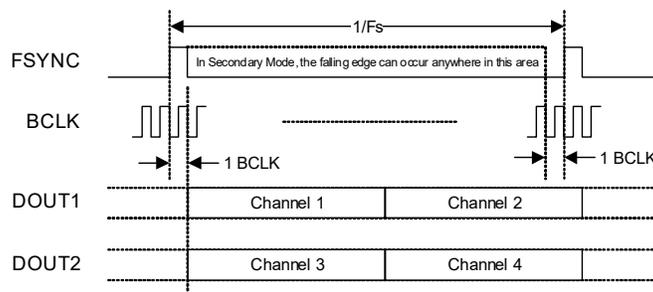

**Figure 4-16. TDM Data Format—2 x DOUT**

In 1-slot mode, the output data is provided on ASP\_DOUT1, ASP\_DOUT2, ASP\_DOUT3, and ASP\_DOUT4. Note the 1-slot format is used to support 705.6 kHz and 768 kHz sample rates only.

The 1-slot TDM format is shown in Fig. 4-17.

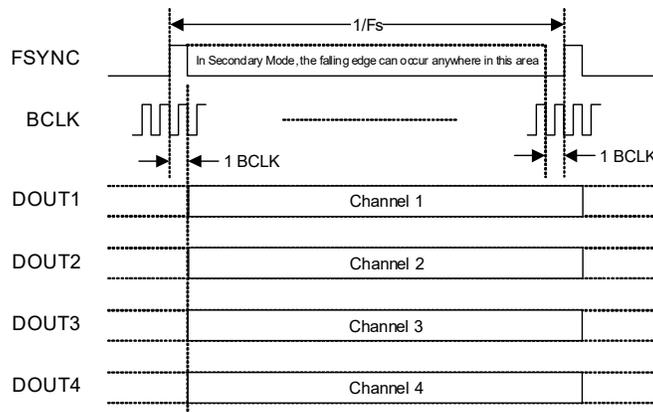

**Figure 4-17. TDM Data Format—4 x DOUT**

#### 4.7.4 Input Channel Summing

The ADC signal paths can be combined as described in Section 4.5.5; this can be used to achieve enhanced performance on the respective paths. If the ADC paths are combined, the ASP data format is redefined as a 2- or 1-channel output.


If the input channels are combined in groups of two, the CS5304P supports a 2-channel output. The ASP configuration depends on the sample rate and the selected data format as described in Table 4-14. The output data is provided on ASP\_DOUT1 in most cases; the ASP\_DOUT2 pin is used for 705.6 kHz/768 kHz operation only.

**Table 4-14. ASP Data Format—2-channel**


ASP Format <sup>1</sup>	ASP Sample Rate <sup>2</sup>	DOUT pins used	Time slots per frame <sup>3</sup>	BCLK <sup>4,5</sup>
I <sup>2</sup> S, Left-Justified	32 kHz	1	2	BCLK ≥ 64 fs <sup>[6]</sup>
	44.1 kHz, 48 kHz	1	2	BCLK ≥ 64 fs
	88.2 kHz, 96 kHz	1	2	BCLK ≥ 64 fs
	176.4 kHz, 192 kHz	1	2	BCLK ≥ 64 fs
	352.8 kHz, 384 kHz	1	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	—	—	—
	Autodetect (32 kHz–192 kHz)	1	2	BCLK ≥ 64 fs
TDM—minimum time slots	32 kHz	1	2	BCLK ≥ 64 fs <sup>[6]</sup>
	44.1 kHz, 48 kHz	1	2	BCLK ≥ 64 fs
	88.2 kHz, 96 kHz	1	2	BCLK ≥ 64 fs
	176.4 kHz, 192 kHz	1	2	BCLK ≥ 64 fs
	352.8 kHz, 384 kHz	1	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	2	1	BCLK = 32 fs
	Autodetect (32 kHz–192 kHz)	1	2	BCLK ≥ 64 fs
TDM—maximum time slots	32 kHz	1	16	BCLK ≥ 512 fs <sup>[6]</sup>
	44.1 kHz, 48 kHz	1	16	BCLK = 512 fs
	88.2 kHz, 96 kHz	1	8	BCLK = 256 fs
	176.4 kHz, 192 kHz	1	4	BCLK = 128 fs
	352.8 kHz, 384 kHz	1	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	2	1	BCLK = 32 fs
	Autodetect (32 kHz–192 kHz)	1	4	BCLK ≥ 128 fs

1. The ASP format is selected using [ASP\\_FORMAT](#).
2. The sample rate is selected using [SAMPLE\\_RATE](#).
3. Time slots per frame is the number of data-sample time slots supported on each of the active DOUT pins.
4. The BCLK rate must be a constant integer multiple of the sample rate (fs).
5. fs = sample rate. In ASP primary mode, the BCLK frequency is configured using [ASP\\_BCLK\\_FREQ](#).
6. In ASP primary mode, the specified minimum BCLK frequency for 32 kHz sample rate is not supported. The available options correspond to 96 fs, 192 fs, 384 fs, or 768 fs.


The 2-channel ASP format is illustrated in Fig. 4-18 through Fig. 4-21.

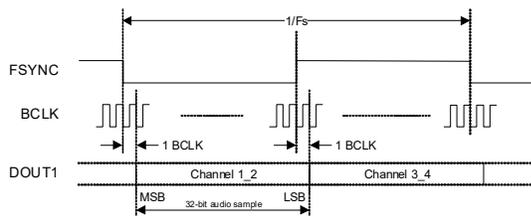


**Figure 4-18. I<sup>2</sup>S Data Format**

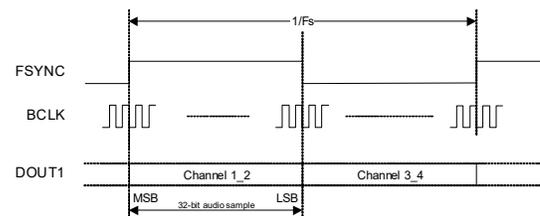

**Figure 4-19. Left-Justified Data Format**

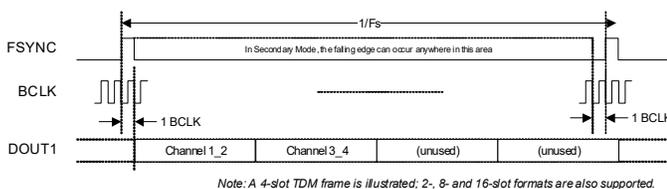

**Figure 4-20. TDM Data Format—1 x DOUT**

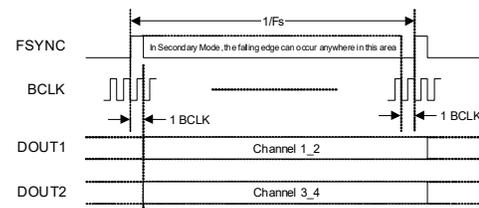

**Figure 4-21. TDM Data Format—2 x DOUT**


If the input channels are combined in a group of four, the CS5304P supports a 1-channel output. The ASP configuration depends on the sample rate and the selected data format as described in [Table 4-15](#). The output data is provided on ASP\_DOUT1; the ASP\_DOUT2, ASP\_DOUT3 and ASP\_DOUT4 pins are not used.

**Table 4-15. ASP Data Format—1-channel**


ASP Format <sup>1</sup>	ASP Sample Rate <sup>2</sup>	DOUT pins used	Time slots per frame <sup>3</sup>	BCLK <sup>4,5</sup>
I <sup>2</sup> S, Left-Justified	32 kHz	1	2	BCLK ≥ 64 fs <sup>[6]</sup>
	44.1 kHz, 48 kHz	1	2	BCLK ≥ 64 fs
	88.2 kHz, 96 kHz	1	2	BCLK ≥ 64 fs
	176.4 kHz, 192 kHz	1	2	BCLK ≥ 64 fs
	352.8 kHz, 384 kHz	1	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	—	—	—
	Autodetect (32 kHz–192 kHz)	1	2	BCLK ≥ 64 fs
TDM—minimum time slots	32 kHz	1	1	BCLK ≥ 64 fs <sup>[6]</sup>
	44.1 kHz, 48 kHz	1	1	BCLK ≥ 64 fs
	88.2 kHz, 96 kHz	1	1	BCLK ≥ 32 fs
	176.4 kHz, 192 kHz	1	1	BCLK ≥ 32 fs
	352.8 kHz, 384 kHz	1	1	BCLK ≥ 32 fs
	705.6 kHz, 768 kHz	1	1	BCLK = 32 fs
	Autodetect (32 kHz–192 kHz)	1	1	BCLK ≥ 64 fs
TDM—maximum time slots	32 kHz	1	16	BCLK ≥ 512 fs <sup>[6]</sup>
	44.1 kHz, 48 kHz	1	16	BCLK = 512 fs
	88.2 kHz, 96 kHz	1	8	BCLK = 256 fs
	176.4 kHz, 192 kHz	1	4	BCLK = 128 fs
	352.8 kHz, 384 kHz	1	2	BCLK = 64 fs
	705.6 kHz, 768 kHz	1	1	BCLK = 32 fs
	Autodetect (32 kHz–192 kHz)	1	4	BCLK ≥ 128 fs

1. The ASP format is selected using [ASP\\_FORMAT](#) (in software control mode).
2. The sample rate is selected using [SAMPLE\\_RATE](#) (in software control mode).
3. Time slots per frame is the number of data-sample time slots supported on each of the active DOUT pins.
4. The BCLK rate must be a constant integer multiple of the sample rate (fs).
5. fs = sample rate. In ASP primary mode, the BCLK frequency is configured using [ASP\\_BCLK\\_FREQ](#).
6. In ASP primary mode, the specified minimum BCLK frequency for 32 kHz sample rate is not supported. The available options correspond to 96 fs, 192 fs, 384 fs, or 768 fs.


The 1-channel ASP format is illustrated in [Fig. 4-22](#) through [Fig. 4-24](#).

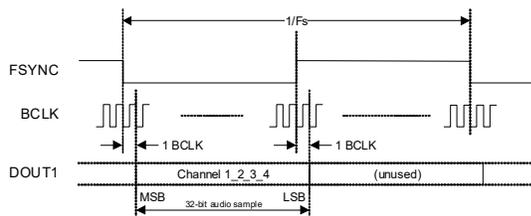

**Figure 4-22. I<sup>2</sup>S Data Format**

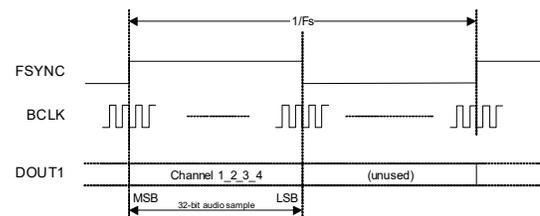

**Figure 4-23. Left-Justified Data Format**

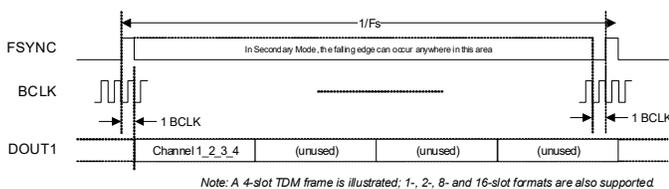


**Figure 4-24. TDM Data Format**

### 4.7.5 ASP Channel Reverse Order


The CS5304P supports an option to reverse the ASP channel order. If the reverse channel order is selected, the ASP data format is reconfigured to output the channels in the opposite order to the default order shown in [Section 4.7.3](#) and [Section 4.7.4](#).

The reverse channel-order option can be used to ease PCB layout constraints, enabling the ASP data ordering to be aligned with the external pin connections, regardless of the orientation of the device on the PCB.

The reverse channel order is illustrated in [Fig. 4-25](#) and [Fig. 4-26](#). The I<sup>2</sup>S data format is shown as an example; the equivalent channel substitutions are supported in left-justified and TDM format also.

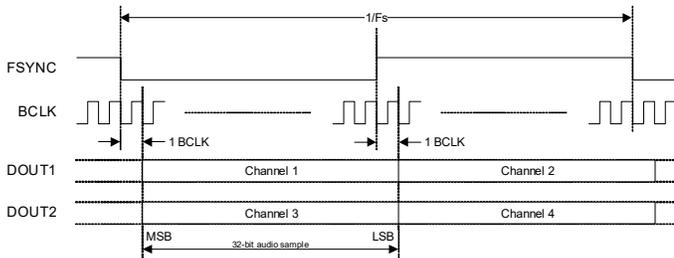

**Figure 4-25. Default Channel Order**

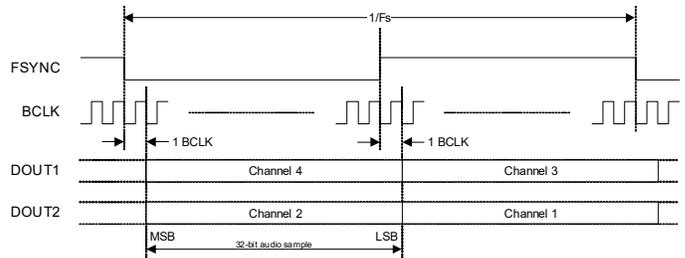

**Figure 4-26. Reverse Channel Order**

In hardware control mode, the ASP channel order is selected using the CONFIG4 hardware control pin, as described in [Section 4.2](#). In software (I<sup>2</sup>C/SPI) control mode, the ASP channel order is selected using [ASP\\_CH\\_REVERSE](#).

## 4.8 I<sup>2</sup>C/SPI Control Port

The CS5304P incorporates a control port, supporting I<sup>2</sup>C or SPI modes of operation. In software control mode, the CS5304P is configured by writing to control registers using the control port.

The control port is automatically configured in I<sup>2</sup>C mode or SPI mode following the first valid I<sup>2</sup>C/SPI activity detected after power-on or hardware reset.

### 4.8.1 I<sup>2</sup>C Control Port

The I<sup>2</sup>C control port is supported using the I2C\_SCL and I2C\_SDA pins.

The CS5304P is a target device on the I<sup>2</sup>C bus—SCL is a clock input, while SDA is a bidirectional data pin. To allow arbitration of multiple targets (and/or multiple controllers) on the same interface, the CS5304P transmits Logic 1 by tristating the SDA pin, rather than pulling it high. An external pull-up resistor is required to pull the SDA line high so that the Logic 1 can be recognized by the controller.

In order to allow many devices to share a single two-wire control bus, every device on the bus has a unique 8-bit device address (this is not the same as the address of each register in the CS5304P). Note that the LSB of the device address is the read/write bit; this bit is set to Logic 1 for read and Logic 0 for write.

The I<sup>2</sup>C device address is configured using the CONFIG5 pin as described in [Table 4-16](#).

**Table 4-16. I<sup>2</sup>C Address Selection—CONFIG5 pin**

Pin Configuration	I <sup>2</sup> C Address	
Pull-up to VDD_A	0 Ω	0x9E (write), 0x9F (read)
	4.7 kΩ	0x9C (write), 0x9D (read)
	22 kΩ	0x9A (write), 0x9B (read)
	100 kΩ	0x98 (write), 0x99 (read)
Pull-down to GND_A	100 kΩ	0x96 (write), 0x97 (read)
	22 kΩ	0x94 (write), 0x95 (read)
	4.7 kΩ	0x92 (write), 0x93 (read)
	0 Ω	0x90 (write), 0x91 (read)

The host device indicates the start of data transfer with a high-to-low transition on SDA while SCL remains high. This indicates that a device address and subsequent address/data bytes follow. The CS5304P responds to the start condition and shifts in the next 8 bits on SDA (8-bit device address, including read/write bit, MSB first). If the device address received matches the device address of the CS5304P, the CS5304P responds by pulling SDA low on the next clock pulse (ACK). If the device address is not recognized or the R/W bit is set incorrectly, the CS5304P returns to the idle condition and waits for a new start condition.

If the device address matches the device address of the CS5304P, the data transfer continues. The controller indicates the end of data transfer with a low-to-high transition on SDA while SCL remains high. After receiving a complete address and data sequence the CS5304P returns to the idle state and waits for another start condition. If a start or stop condition is detected out of sequence at any point during data transfer (i.e., SDA changes while SCL is high), the device returns to the idle condition.

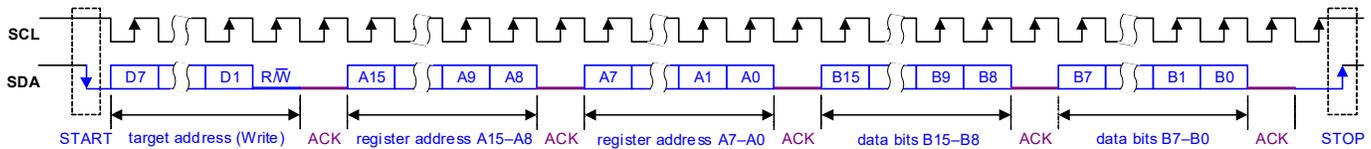
The I<sup>2</sup>C interface uses a 16-bit register address and 16-bit data words. The register address must be aligned to a 16-bit word boundary (i.e., the LSB must be 0). Note that the full I<sup>2</sup>C message protocol also includes a device address, a read/write bit, and other signaling bits (see Fig. 4-27 and Fig. 4-28).

The CS5304P supports the following read and write operations:

- Single write
- Single read
- Multiple write
- Multiple read

Continuous (multiple) read and write modes allow register operations to be scheduled faster than is possible with single register operations. In these modes, the CS5304P automatically increments the register address after each data word. Successive data words can be input/output every two data bytes.


The I<sup>2</sup>C protocol for a single, 16-bit register write operation is shown in Fig. 4-27.



*Note: The SDA pin is used as input for the control register address and data; SDA is pulled low by the receiving device to provide the acknowledge (ACK) response*

**Figure 4-27. Control Interface I<sup>2</sup>C Register Write**

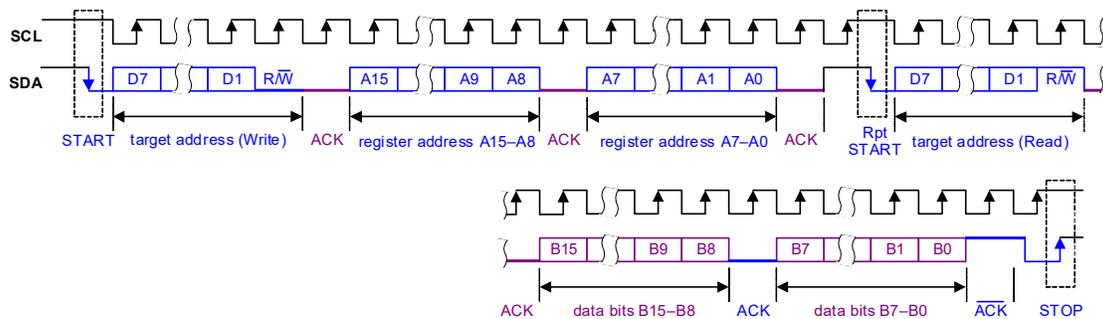The I<sup>2</sup>C protocol for a single, 16-bit register read operation is shown in Fig. 4-28.



*Note: The SDA pin is driven by both the controller and target devices in turn to transfer target address, register address, data and ACK responses*

**Figure 4-28. Control Interface I<sup>2</sup>C Register Read**

The control interface also supports other register operations; the interface protocol for these operations is shown in Fig. 4-29 through Fig. 4-32. The terminology used in the following figures is detailed in Table 4-17.

**Table 4-17. Control Interface (I2C) Terminology**

Terminology	Description
S	Start condition
Sr	Repeated start
A	Acknowledge (SDA low)
$\bar{A}$	No Acknowledge (SDA high)
P	Stop condition
$\overline{R/W}$	Read/not Write: 0 = Write, 1 = Read
[White field]	Data flow from bus controller to CS5304P
[Gray field]	Data from CS5304P to bus controller

Fig. 4-29 shows a single register write to a specified address.

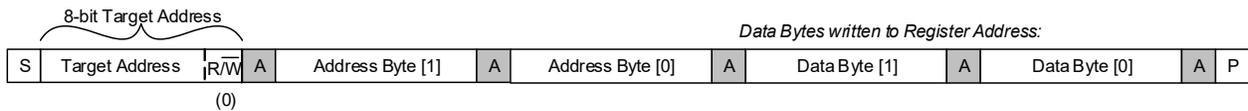

**Figure 4-29. Single-Register Write to Specified Address**

Fig. 4-30 shows a single register read from a specified address.

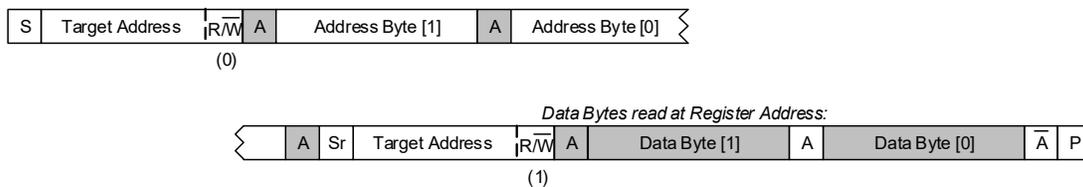

**Figure 4-30. Single-Register Read from Specified Address**

Fig. 4-31 shows a multiple register write to a specified address.


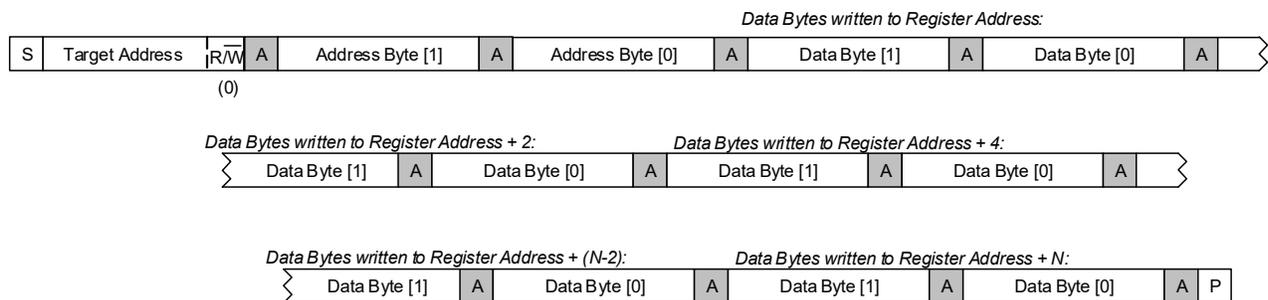

**Figure 4-31. Multiple-Register Write to Specified Address**

Fig. 4-32 shows a multiple register read from a specified address.

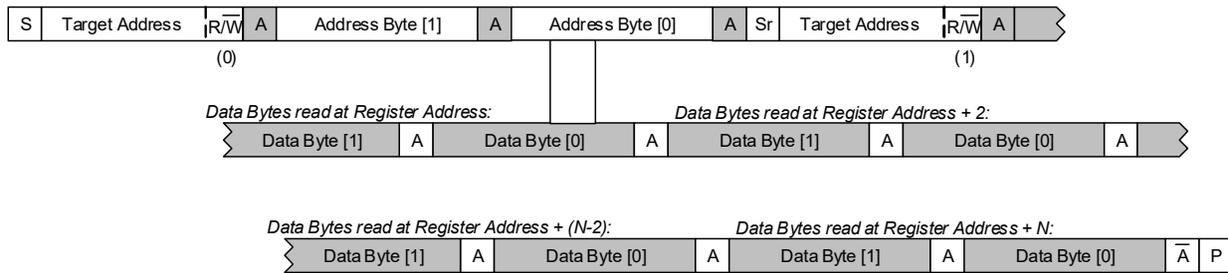

**Figure 4-32. Multiple-Register Read from Specified Address**

## 4.8.2 SPI Interface

The SPI interface is supported using the  $\overline{\text{SPI\_CS}}$ , SPI\_SCK, SPI\_SDI, and SPI\_SDO pins.

The SDI (data-input) pin supports the following behavior:

- In write operations ( $\overline{\text{R/W}} = 0$ ), the SDI pin input is driven by the controlling device.
- In read operations ( $\overline{\text{R/W}} = 1$ ), the SDI pin is ignored following receipt of the valid register address.

The SDO (data-output) pin supports the following behavior:


- If  $\overline{\text{CS}}$  is asserted (Logic 0), the SDO output is actively driven when outputting data and is high impedance at other times. If  $\overline{\text{CS}}$  is not asserted, the SDO output is high impedance.
- The high-impedance state of the SDO output allows the pin to be shared with other peripheral devices.
- The output (SDO) data bit is available to the host device at the rising edge of SCK. See Table 3-13 for timing information.

The SPI interface uses a 15-bit register address and 16-bit data words. Note that the full SPI message protocol also includes a read/write bit and a 16-bit padding phase (see Fig. 4-33 and Fig. 4-34).

Continuous read and write modes enable multiple register operations to be scheduled faster than is possible with single register operations. In these modes, the CS5304P automatically increments the register address at the end of each data word, for as long as  $\overline{\text{CS}}$  is held low and SCK is toggled. Successive data words can be input/output every 16 clock cycles.


The SPI protocol is shown in Fig. 4-33 and Fig. 4-34.

Fig. 4-33 shows a single register write to a specified address.

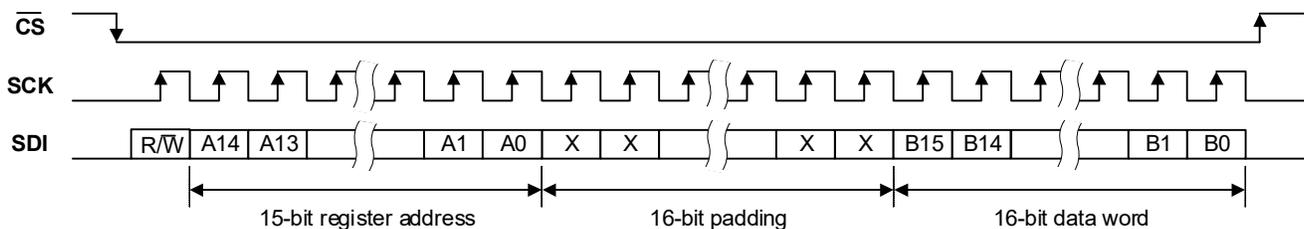


**Figure 4-33. Control Interface SPI Register Write**

Fig. 4-34 shows a single register read from a specified address.

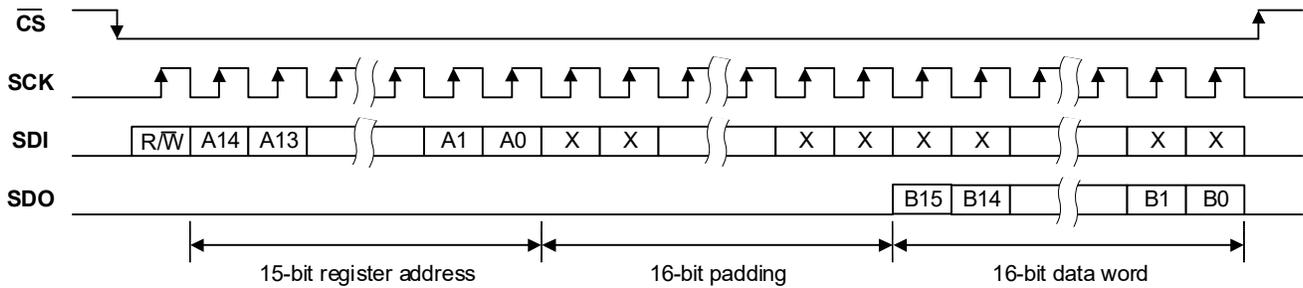


**Figure 4-34. Control Interface SPI Register Read**

Fig. 4-35 shows a multiple register write to a specified address.



**Figure 4-35. Multiple-Register Write to Specified Address**

Fig. 4-36 shows a multiple register read from a specified address.



**Figure 4-36. Multiple-Register Read from Specified Address**

## 4.9 General-Purpose Output

The CS5304P supports general-purpose outputs on selected digital I/O pins. General-purpose (GP) outputs can be used to provide hardware control signals to other devices.

The general-purpose outputs are multiplexed with other pin functions (e.g., hybrid gain control, I<sup>2</sup>C/SPI control port, or the audio serial port). Note that care must be taken not to configure a pin for GP output if the shared pin function is required.

Each pin is configured for GP output by setting the respective `_FN` bit as noted in [Table 4-18](#). If a pin is configured for GP output, the logic output level is selected using the respective `_LVL` bit.

**Table 4-18. General Purpose Output**

Pin Name	Power Supply <sup>1</sup>	Pin Function Select	Output Level Select	Notes
CONFIG5	VDD_A	<a href="#">CONFIG5_FN</a>	<a href="#">CONFIG5_LVL</a>	GP output is not supported if the I2C control port (see <a href="#">Section 4.8.1</a> ) is used.
CONFIG4/HGC_CS	VDD_A	<a href="#">CONFIG4_FN</a>	<a href="#">CONFIG4_LVL</a>	GP output is not supported if hybrid gain control (see <a href="#">Section 4.5.4</a> ) is used.
CONFIG3/HGC_SDO	VDD_A	<a href="#">CONFIG3_FN</a>	<a href="#">CONFIG3_LVL</a>	
CONFIG2/HGC_SCK	VDD_A	<a href="#">CONFIG2_FN</a>	<a href="#">CONFIG2_LVL</a>	
SPI_SCK	VDD_IO	<a href="#">SPI_SCK_FN</a>	<a href="#">SPI_SCK_LVL</a>	GP output is not supported if the SPI control port (see <a href="#">Section 4.8.2</a> ) is used.
SPI_CS	VDD_IO	<a href="#">SPI_CS_FN</a>	<a href="#">SPI_CS_LVL</a>	
ASP_DOUT4	VDD_IO	<a href="#">ASP_DOUT4_FN</a>	<a href="#">ASP_DOUT4_LVL</a>	Refer to <a href="#">Section 4.7</a> to determine which pins are required for ASP output, depending on the applicable data format. Unused pins can be configured for GP output.
ASP_DOUT3	VDD_IO	<a href="#">ASP_DOUT3_FN</a>	<a href="#">ASP_DOUT3_LVL</a>	
ASP_DOUT2	VDD_IO	<a href="#">ASP_DOUT2_FN</a>	<a href="#">ASP_DOUT2_LVL</a>	

1. The digital I/O logic levels for each pin are defined with respect to the applicable power supply. See [Table 3-8](#) for details.

The drive strength of each GP output is configurable using the `_DRV` fields as noted in [Table 4-19](#). Other digital outputs can be similarly configured. Note the `_DRV` field only has effect if the respective pin is configured as an output function.

**Note:** The `_DRV` fields are locked to prevent accidental adjustment. To allow write access to these fields, the user key must be set using the `USER_KEY_CTRL` field. The user key is set by writing 0xAA, followed by 0x55 to `USER_KEY_CTRL`. The user key is cleared by writing any other value.

**Table 4-19. Output Drive Strength**

Pin Name	Drive Strength Configuration
CONFIG5	<a href="#">CONFIG5_DRV</a>
CONFIG4/HGC_CS	<a href="#">CONFIG4_DRV</a>
CONFIG3/HGC_SDO	<a href="#">CONFIG3_DRV</a>
CONFIG2/HGC_SCK	<a href="#">CONFIG2_DRV</a>
SPI_SCK	<a href="#">SPI_SCK_DRV</a>
SPI_CS	<a href="#">SPI_CS_DRV</a>
SPI_SDI/I2C_SDA	<a href="#">SPI_SDI_I2C_SDA_DRV</a>
SPI_SDO/I2C_SCL	<a href="#">SPI_SDO_I2C_SCL_DRV</a>
ASP_BCLK	<a href="#">ASP_BCLK_DRV</a>
ASP_FSYNC	<a href="#">ASP_FSYNC_DRV</a>
ASP_DOUT4	<a href="#">ASP_DOUT4_DRV</a>
ASP_DOUT3	<a href="#">ASP_DOUT3_DRV</a>
ASP_DOUT2	<a href="#">ASP_DOUT2_DRV</a>
ASP_DOUT1	<a href="#">ASP_DOUT1_DRV</a>

## 4.10 Device ID

The device ID, and other associated data, can be read from the control fields listed in [Table 4-20](#).


**Table 4-20. Device ID**

Label	Description
<a href="#">DEVID</a>	Device ID
<a href="#">AREVID</a>	All-layer device revision
<a href="#">MTLREVID</a>	Metal-layer device revision

## 5 Applications

### 5.1 Input Buffer Circuit

The analog input channels are supported using external buffer circuits. A typical buffer circuit is shown in Fig. 5-1, comprising a high-pass filter and anti-alias filter. The typical buffer circuit shown produces a full-scale (0 dBFS) output from a  $8 V_{RMS}$  differential input.

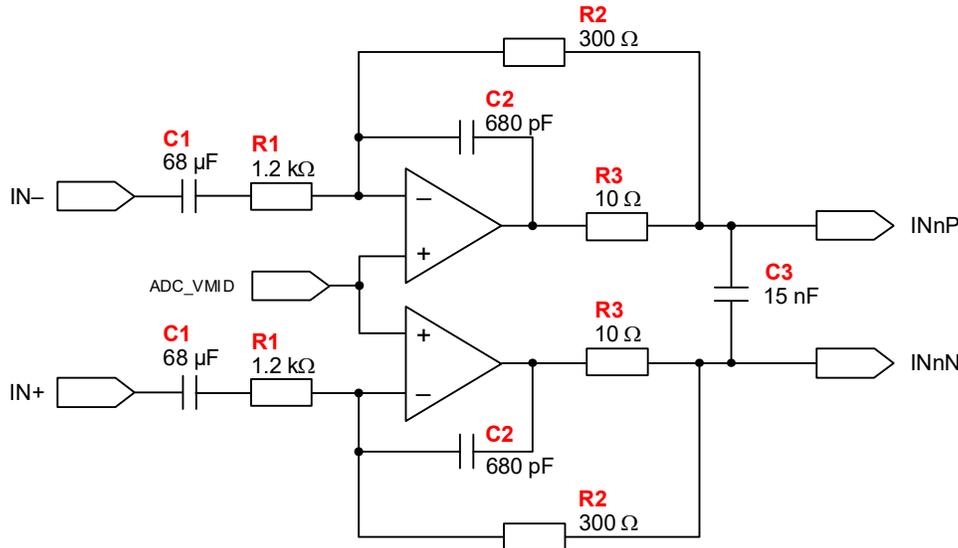

**Figure 5-1. Differential Input Buffer**

The high-pass filter is provided by the AC-coupling capacitor C1 and series resistor R1. Using the values shown, the  $-3$  dB cut-off frequency ( $F_C$ ) can be calculated using the following equation:

$$F_C = \frac{1}{2\pi R_1 C_1} = \frac{1}{2 \times \pi \times 1.2 \times 10^3 \times 68 \times 10^{-6}} = 1.95 \text{ Hz}$$

The anti-alias filter is provided by the op-amp and associated feedback components. The objective is to provide a flat passband for the audio input bandwidth, and sufficient attenuation at the ADC-modulator sample frequency. The low output impedance of the circuit minimizes the distortion of the signal path.

The typical filter shown provides a  $-3$  dB cut-off frequency around 640 kHz, suitable for the highest CS5304P sample rate of 768 kHz. The attenuation slope of  $-12$  dB/octave results in 42 dB attenuation at the ADC-modulator sample frequency of 6.144 MHz.

The  $-3$  dB cut-off frequency is approximated by the following equation:

$$F_C = \frac{1}{2\pi \sqrt{R_2 R_3 C_2^2 C_3}} = \frac{1}{2 \times \pi \times \sqrt{300 \times 10 \times 680 \times 10^{-12} \times 2 \times 15 \times 10^{-9}}} = 640 \text{ kHz}$$

The gain of the input buffer is determined by the ratio  $R_1/R_2$ . The gain should be configured to provide a full-scale signal of  $2 V_{RMS}$  at the input to the CS5304P. The values shown in Fig. 5-1 provide a ratio of 4; in this configuration, the buffer supports a full-scale input of  $8 V_{RMS}$ .

The VMID reference (common-mode level) for the input buffer can be provided from the ADC\_VMID output. Note that, if mid-impedance input is selected (see Section 4.5.1), a buffered VMID reference must be provided using external components as shown in Fig. 2-2.

Alternative designs for the input buffer are also supported; refer to App Note AN0556 for further information.

### 5.1.1 Recommended Components

To achieve the specified performance characteristics, the choice of external components should observe the following recommendations:

- Capacitors should be stable dielectric types, such as C0G (NP0) or electrolytic.
- Resistors should be low value where possible, to minimize thermal noise.
- Low-noise op-amps should be used, such as Texas Instruments OP1612 or OP1656. The op-amps should meet the minimum performance requirements noted in [Table 5-1](#).

**Table 5-1. Op-Amp Specification**

Parameter	Specification
Input noise	5 nV/√Hz
Unity gain bandwidth	15 MHz
Slew rate	5 V/μs
Total harmonic distortion + noise (THD+N)	-128 dB

### 5.1.2 Unused Input Pins

The recommended input buffer circuit (see [Fig. 5-1](#)) provides a differential connection to the input pins INxP and INxN. Alternative input-buffer circuits may use only a single-ended connection to INxP or INxN. If a single-ended input configuration is used, the unused input pin must be connected to a buffered VMID reference. See [Table 3-9](#) for a buffered VMID circuit.

If one or more input channel is not used (disabled), the respective input pins INxP and INxN should be floating (no connection), as noted in [Section 1.3](#).

## 6 Register Quick Reference

This section gives an overview of the control port registers. Refer to the following bit definition tables for bit assignment information.

This register view is for the CS5304P.

- The register field default values are established upon the deassertion of the **RESET** pin or following soft reset.
- A "—" represents a reserved field/access type.
- The reserved field values must not be modified.
- The registers are 16 bits wide, and only word transactions are allowed.
- All visible fields are read/write except where indicated with the following shading:

Read/write access    
  Read-only access    
  Write-only access    
  User key password access

**Table 6-1. Block Base Addresses**

Base Address	Block Name	Register Quick Reference	Register Description Reference
0x0000 0000	<b>DEVID</b>	<a href="#">Section 6.1</a>	<a href="#">Section 7.1</a>
0x0000 0040	<b>CONFIG</b>	<a href="#">Section 6.2</a>	<a href="#">Section 7.2</a>
0x0000 0080	<b>INPUT_PATH</b>	<a href="#">Section 6.3</a>	<a href="#">Section 7.3</a>
0x0000 0100	<b>CTRL_KEYS</b>	<a href="#">Section 6.4</a>	<a href="#">Section 7.4</a>
0x0000 2000	<b>HGC</b>	<a href="#">Section 6.5</a>	<a href="#">Section 7.5</a>
0x0000 3D00	<b>PIN_CONFIG</b>	<a href="#">Section 6.6</a>	<a href="#">Section 7.6</a>
0x0000 3E00	<b>CLIP_DETECT</b>	<a href="#">Section 6.7</a>	<a href="#">Section 7.7</a>

### 6.1 DEVID

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0x0000 0000 <a href="#">p. 52</a>	DEVID	DEVID															
		0	1	0	1	0	0	1	1	0	0	0	0	0	1	0	0
0x0000 0004 <a href="#">p. 52</a>	REVID	—								AREVID				MTLREVID			
		0	0	0	0	0	0	0	0	1	0	1	1	0	0	0	0
0x0000 0022 <a href="#">p. 52</a>	SW_RESET	SW_RESET								—							
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

### 6.2 CONFIG

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0x0000 0040 <a href="#">p. 53</a>	CLK_CFG_0	—			SYSCLK_SRC	—					PLL_REFCLK_FREQ		—			PLL_REFCLK_SRC	
		0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0
0x0000 0042 <a href="#">p. 53</a>	CLK_CFG_1	—											SAMPLE_RATE				
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
0x0000 0044 <a href="#">p. 53</a>	CHIP_ENABLE	—															
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0048 <a href="#">p. 54</a>	ASP_CFG	—								ASP_BCLK_INV	ASP_PRIMARY	—				ASP_BCLK_FREQ	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0050 <a href="#">p. 54</a>	SIGNAL_PATH_CFG	—					ASP_CH_REVERSE	—				ASP_TDM_SLOT		ASP_FORMAT			
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## 6.3 INPUT\_PATH

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0x0000 0080 p. 55	IN_ENABLES	—												IN4_ADC_EN	IN3_ADC_EN	IN2_ADC_EN	IN1_ADC_EN
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0082 p. 55	IN_RAMP_SUM	—	IN_SUM_MODE		—	IN_CLIP_THRESH				—	IN_RAMP_RATE_DEC			—	IN_RAMP_RATE_INC		
		0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0
0x0000 0086 p. 56	IN_FILTER	—		IN_HPF_EN		—		IN_FILTER_SEL		—							
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0088 p. 56	IN_HIZ	—														IN34_HIZ	IN12_HIZ
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 008A p. 56	IN_INV	—												IN4_INV	IN3_INV	IN2_INV	IN1_INV
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0090 p. 57	IN_VOL_CTRL1_0	IN1_MUTE	—							IN1_VOL							
		1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0092 p. 57	IN_VOL_CTRL1_1	IN2_MUTE	—							IN2_VOL							
		1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0094 p. 57	IN_VOL_CTRL2_0	IN3_MUTE	—							IN3_VOL							
		1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 0096 p. 57	IN_VOL_CTRL2_1	IN4_MUTE	—							IN4_VOL							
		1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 00A0 p. 58	IN_VOL_CTRL5	—															IN_VU
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## 6.4 CTRL\_KEYS

Address	Register	15 ... 8	7	6	5	4	3	2	1	0	
0x0000 0104 p. 58	USER_KEY_CTRL	— 0x00	USER_KEY_CTRL								0
		0	0	0	0	0	0	0	0	0	

## 6.5 HGC

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
0x0000 2000 p. 58	CONTROL	—												ABORT	—			INIT_UPDATE
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 2004 p. 58	STATUS	—														BUSY_STS		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 2010 p. 59	GEN_CONFIG	—											STEP_RAMP_EN	—	ZC_TIMEOUT			
		0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	
0x0000 2014 p. 59	PATH_DELAY	TM_DELAY						DIG_GAIN_DELAY										
		0	0	0	0	0	0	1	1	0	0	0	0	0	1	0	0	
0x0000 2018 p. 59	TM	TM_HOLD_TIME							—							TM_EN		
		0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
0x0000 201C p. 59	TM_LD_0	—												CH4_TM_LD_EN	CH3_TM_LD_EN	CH2_TM_LD_EN	CH1_TM_LD_EN		
		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1		
0x0000 201E p. 60	TM_LD_1	—			TM_LD_THRESH					—			TM_LD_TIME						
		0	0	0	0	1	0	0	1	0	0	0	0	0	1	1	0	0	
0x0000 2020 p. 60	SPI_0	—						SCK_DIV						—		CPHA	CPOL		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2022 p. 61	SPI_1	—				CS_IDLE_DUR				CS_RISE_DELAY				CS_FALL_DELAY					
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2030 p. 61	CH1_CONFIG	—											CH1_BIT_PATT_LENGTH						
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2034 p. 62	CH2_CONFIG	—											CH2_BIT_PATT_LENGTH						
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2038 p. 62	CH3_CONFIG	—											CH3_BIT_PATT_LENGTH						
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 203C p. 62	CH4_CONFIG	—											CH4_BIT_PATT_LENGTH						
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2050 p. 62	AUX1_CONFIG	—											AUX1_BIT_PATT_LENGTH						
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2054 p. 62	AUX2_CONFIG	—											AUX2_BIT_PATT_LENGTH						
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2060 p. 63	CH1_BIT_PATT_0	CH1_BIT_PATT_0																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2062 p. 63	CH1_BIT_PATT_1	CH1_BIT_PATT_1																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2064 p. 63	CH1_GAIN_0	—						CH1_ANA_GAIN											
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2066 p. 63	CH1_GAIN_1	CH1_UPDATE	—											CH1_DIG_GAIN					
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2068 p. 64	CH2_BIT_PATT_0	CH2_BIT_PATT_0																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 206A p. 64	CH2_BIT_PATT_1	CH2_BIT_PATT_1																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 206C p. 64	CH2_GAIN_0	—						CH2_ANA_GAIN											
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 206E p. 64	CH2_GAIN_1	CH2_UPDATE	—											CH2_DIG_GAIN					
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2070 p. 65	CH3_BIT_PATT_0	CH3_BIT_PATT_0																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2072 p. 65	CH3_BIT_PATT_1	CH3_BIT_PATT_1																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2074 p. 65	CH3_GAIN_0	—						CH3_ANA_GAIN											
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2076 p. 65	CH3_GAIN_1	CH3_UPDATE	—											CH3_DIG_GAIN					
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 2078 p. 66	CH4_BIT_PATT_0	CH4_BIT_PATT_0																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0000 207A p. 66	CH4_BIT_PATT_1	CH4_BIT_PATT_1																	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
0x0000 207C p. 66	CH4_GAIN_0	—					CH4_ANA_GAIN											
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 207E p. 66	CH4_GAIN_1	CH4_UPDATE	—							CH4_DIG_GAIN								
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 20A0 p. 67	AUX1_BIT_PATT_0	AUX1_BIT_PATT_0																
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 20A2 p. 67	AUX1_BIT_PATT_1	AUX1_BIT_PATT_1																
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 20A4 p. 67	AUX2_BIT_PATT_0	AUX2_BIT_PATT_0																
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 20A6 p. 67	AUX2_BIT_PATT_1	AUX2_BIT_PATT_1																
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

## 6.6 PIN\_CONFIG

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0x0000 3D10 p. 67	PAD_DRV1_0	—	ASP_DOUT1_DRV			—	ASP_FSYNC_DRV			—	ASP_BCLK_DRV			—			
		0	1	1	1	0	0	1	1	0	0	1	1	0	0	1	1
0x0000 3D12 p. 68	PAD_DRV1_1	—	SPI_SDI_I2C_SDA_DRV			—	ASP_DOUT4_DRV			—	ASP_DOUT3_DRV			ASP_DOUT2_DRV			
		0	0	1	1	0	1	1	1	0	1	1	1	0	1	1	1
0x0000 3D14 p. 68	PAD_DRV2_0	—	—			—	SPI_SCK_DRV			—	SPI_CS_DRV			SPI_SDO_I2C_SCL_DRV			
		0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
0x0000 3D16 p. 69	PAD_DRV2_1	—	CONFIG5_DRV			—	CONFIG4_DRV			—	CONFIG3_DRV			CONFIG2_DRV			
		0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
0x0000 3D1C p. 69	PAD_CLIP	CLIP_OP_CFG	—							CONFIG4_CLIP_EN	CONFIG3_CLIP_EN	CONFIG2_CLIP_EN	—	SPI_CS_CLIP_EN	ASP_DOUT4_CLIP_EN	ASP_DOUT3_CLIP_EN	ASP_DOUT2_CLIP_EN
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0x0000 3D20 p. 70	PAD_HGC_SPI	—															
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	HGC_SPI_EN
0x0000 3D24 p. 70	PAD_FN	—					CONFIG5_FN	CONFIG4_FN	CONFIG3_FN	CONFIG2_FN	—	SPI_SCK_FN	SPI_CS_FN	ASP_DOUT4_FN	ASP_DOUT3_FN	ASP_DOUT2_FN	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
0x0000 3D28 p. 71	PAD_LVL	—					CONFIG5_LVL	CONFIG4_LVL	CONFIG3_LVL	CONFIG2_LVL	—	SPI_SCK_LVL	SPI_CS_LVL	ASP_DOUT4_LVL	ASP_DOUT3_LVL	ASP_DOUT2_LVL	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

## 6.7 CLIP\_DETECT

Address	Register	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
0x0000 3E1C p. 71	CLIP_WARN	—												IN4_CLIP_WARN	IN3_CLIP_WARN	IN2_CLIP_WARN	IN1_CLIP_WARN	—
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

## 7 Register Descriptions

This section describes each of the control port registers.

This register view is for the CS5304P.

- The register field default values are established upon the deassertion of the  $\overline{\text{RESET}}$  pin or following soft reset.
- A "—" represents a reserved field/access type.
- The reserved field values must not be modified.
- The registers are 16 bits wide, and only word transactions are allowed.
- All visible fields are read/write except where indicated with the following shading:

Read/write access     
  Read-only access     
  Write-only access     
  User key password access

### 7.1 DEVID

#### 7.1.1 DEVID

Address: 0x0000 0000

RO	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	DEVID															
Default	0	1	0	1	0	0	1	1	0	0	0	0	0	1	0	0

Bits	Name	Description
15:0	DEVID	This register indicates the Device ID CS5304P. 0x0000–0x5303 = Reserved 0x5304 = CS5304P 0x5305–0xFFFF = Reserved

#### 7.1.2 REVID

Address: 0x0000 0004

RO	15...8	7	6	5	4	3	2	1	0	
	AREVID				MTLREVID					
Default	0x00	1	0	1	1	0	0	0	0	

Bits	Name	Description
15:8	—	Reserved
7:4	AREVID	This field indicates the all-layer device revision. 0x0–0x9 = Reserved 0xA = Revision Ax 0xB = (Default) Revision Bx 0xC–0xF = Reserved
3:0	MTLREVID	This field indicates the metal-layer device revision. 0x0 = (Default) Revision x0 0x1–0xF = Reserved

#### 7.1.3 SW\_RESET

Address: 0x0000 0022

WO	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	SW_RESET								—							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:8	SW_RESET	Software Reset. Writing 0x5A triggers a reset. 0x00 = (Default) No action 0x01–0x59 = Reserved 0x5A = Software reset 0x5B–0xFF = Reserved
7:0	—	Reserved

## 7.2 CONFIG

### 7.2.1 CLK\_CFG\_0

**Address: 0x0000 0040**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—			SYSCLK_SRC	—				PLL_REFCLK_FREQ		—			PLL_REFCLK_SRC		
Default	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0

Bits	Name	Description
15:13	—	Reserved
12	SYSCLK_SRC	System clock source. If MCLK is selected, the PLL is bypassed. 0 = (Default) MCLK 1 = PLL
11:6	—	Reserved
5:4	PLL_REFCLK_FREQ	PLL reference clock frequency. The selection must match the frequency of the selected input reference. 00 = 3.072/2.8224 MHz 01 = 6.144/5.6448 MHz 10 = 12.288/11.2896 MHz 11 = (Default) 24.576/22.5792 MHz
3:1	—	Reserved
0	PLL_REFCLK_SRC	PLL reference clock source. Note the BCLK reference is only valid in ASP Secondary Mode. 0 = (Default) BCLK 1 = MCLK

### 7.2.2 CLK\_CFG\_1

**Address: 0x0000 0042**

RW	15...8	7	6	5	4	3	2	1	0
	—	—						SAMPLE_RATE	
Default	0x00	0	0	0	0	0	0	0	1

Bits	Name	Description
15:3	—	Reserved
2:0	SAMPLE_RATE	Audio sample frequency. Note the sample rate must be integer-related to the system clock frequency. Auto-detect is only valid if sample rate = 32-192kHz, clock reference = MCLK, and the ASP is in Secondary Mode. 000 = 32 kHz 001 = (Default) 48/44.1 kHz 010 = 96/88.2 kHz 011 = 192/176.4 kHz 100 = 384/356.8 kHz 101 = 768/705.6 kHz 110 = Auto-detect 111 = Reserved

### 7.2.3 CHIP\_ENABLE

**Address: 0x0000 0044**

RW	15...8	7	6	5	4	3	2	1	0
	—	—						GLOBAL_EN	
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:1	—	Reserved
0	GLOBAL_EN	Global enable. Set to 1 to configure and enable all functions. Clear to 0 to disable. Note the clocking and ASP control registers are only valid on the rising edge of GLOBAL_EN. It is recommended to select the disabled state (GLOBAL_EN=0) before writing to these registers.

**7.2.4 ASP\_CFG**
**Address: 0x0000 0048**

RW	15...8	7	6	5	4	3	2	1	0
	—	—	ASP_BCLK_INV	ASP_PRIMARY	—	—	—	ASP_BCLK_FREQ	—
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:7	—	Reserved
6	ASP_BCLK_INV	ASP BCLK polarity. Selects the valid BCLK edge for data sampling. In non-inverted mode, data is valid on BCLK rising edge. Data is driven on BCLK falling edge (half-cycle mode) or rising edge (full-cycle mode). In inverted mode, data is valid on BCLK falling edge. Data is driven on BCLK rising edge (half-cycle mode) or falling edge (full-cycle mode). 0 = (Default) Non-inverted 1 = Inverted
5	ASP_PRIMARY	ASP Primary/Secondary Mode select. In ASP Primary Mode, BCLK and FSYNC are outputs. In ASP Secondary Mode, BCLK and FSYNC are inputs. 0 = (Default) Secondary Mode 1 = Primary Mode
4:2	—	Reserved
1:0	ASP_BCLK_FREQ	ASP BCLK frequency. The BCLK frequency must be high enough to support the required number of data bits at the selected sample rate. Only valid in ASP Primary Mode. Note the BCLK frequency is integer-related to the system clock frequency i.e., multiples of 3.072 MHz for 12.288 / 24.576 MHz system clock, or multiples of 2.8224 MHz for 11.2896 / 22.5792 MHz system clock. 00 = (Default) 3.072/2.8224 MHz 01 = 6.144/5.6448 MHz 10 = 12.288/11.2896 MHz 11 = 24.576/22.5792 MHz

**7.2.5 SIGNAL\_PATH\_CFG**
**Address: 0x0000 0050**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—	—	—	—	—	—	ASP_CH_REVERSE	—	—	—	ASP_TDM_SLOT	—	—	ASP_FORMAT	—	—
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:10	—	Reserved
9	ASP_CH_REVERSE	ASP channel-ordering reversal. Selects normal- or reverse-order ASP data format. 0 = (Default) Normal 1 = Reverse
8:6	—	Reserved
5:3	ASP_TDM_SLOT	TDM slot select. Configures which TDM slots are used in TDM maximum-time-slots mode. Note the valid selections vary depending on whether the device is configured in 4-channel mode (default), or in 2-channel summing mode. In 4-channel mode (default), valid selections are 0x0, 0x2, 0x4, or 0x6 only. 000 = (Default) Slots 0-3 (4-ch), Slots 0-1 (2-ch) 001 = Slots 2-3 (2-ch) 010 = Slots 4-7 (4-ch), Slots 4-5 (2-ch) 011 = Slots 6-7 (2-ch) 100 = Slots 8-11 (4-ch), Slots 8-9 (2-ch) 101 = Slots 10-11 (2-ch) 110 = Slots 12-15 (4-ch), Slots 12-13 (2-ch) 111 = Slots 14-15 (2-ch)
2:0	ASP_FORMAT	ASP data format. Selects how the audio samples are arranged within the FSYNC frame. In TDM Maximum Time Slots Full-Cycle Mode, data is driven on same edge as sampling edge. In TDM Maximum Time Slots Half-Cycle Mode, data is driven on opposite edge to sampling edge. 000 = (Default) I2S Mode 001 = Left-Justified Mode 010–100 = Reserved 101 = TDM Maximum Time Slots Full-Cycle Mode 110 = TDM Maximum Time Slots Half-Cycle Mode 111 = TDM Minimum Time Slots Mode

## 7.3 INPUT\_PATH

### 7.3.1 IN\_ENABLES

**Address: 0x0000 0080**

RW	15...8	7	6	5	4	3	2	1	0
	—		—			IN4_ADC_EN	IN3_ADC_EN	IN2_ADC_EN	IN1_ADC_EN
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:4	—	Reserved
3	IN4_ADC_EN	Channel 4 enable. Note that Channels 3-4 should always be enabled/disabled as a pair. 0 = (Default) Disabled 1 = Enabled
2	IN3_ADC_EN	Channel 3 enable. Note that Channels 3-4 should always be enabled/disabled as a pair. 0 = (Default) Disabled 1 = Enabled
1	IN2_ADC_EN	Channel 2 enable. Note that Channels 1-2 should always be enabled/disabled as a pair. 0 = (Default) Disabled 1 = Enabled
0	IN1_ADC_EN	Channel 1 enable. Note that Channels 1-2 should always be enabled/disabled as a pair. 0 = (Default) Disabled 1 = Enabled

### 7.3.2 IN\_RAMP\_SUM

**Address: 0x0000 0082**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—	IN_SUM_MODE	—		IN_CLIP_THRESH				—	IN_RAMP_RATE_DEC			—	IN_RAMP_RATE_INC		
Default	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0

Bits	Name	Description
15	—	Reserved
14:13	IN_SUM_MODE	ADC input summing select. Combines the input paths in groups of two, four, or eight channels. The grouped channels must be linked together at the respective input pins. The grouped paths are configured using the control registers associated with the lowest-numbered ADC in each group. 00 = (Default) No summing of channels 01 = Inputs combined in groups of two. ADC1+ADC2, ADC3+ADC4 10 = Inputs combined in groups of four. ADC1+ADC2+ADC3+ADC4 11 = Reserved
12	—	Reserved
11:8	IN_CLIP_THRESH	Input clip-warning threshold 0x0 = (Default) 0.0 dBFS 0x1 = -0.125 dBFS 0x2 = -0.25 dBFS 0x3 = -0.5 dBFS 0x4 = -1.0 dBFS 0x5 = -3.0 dBFS 0x6 = -6.0 dBFS 0x7-0xF = Reserved
7	—	Reserved
6:4	IN_RAMP_RATE_DEC	Volume Decrease Ramp Rate (ms/6 dB), used for gain changes including HGC operations. This field should not be changed while a volume ramp is in progress. 000 = 0 ms 001 = 0.5 ms 010 = (Default) 1 ms 011 = 2 ms 100 = 4 ms 101 = 8 ms 110 = 15 ms 111 = 30 ms
3	—	Reserved
2:0	IN_RAMP_RATE_INC	Volume Increase Ramp Rate (ms/6 dB), used for gain changes including HGC operations. This field should not be changed while a volume ramp is in progress. 000 = 0 ms 001 = 0.5 ms 010 = (Default) 1 ms 011 = 2 ms 100 = 4 ms 101 = 8 ms 110 = 15 ms 111 = 30 ms

**7.3.3 IN\_FILTER**
**Address: 0x0000 0086**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—			IN_HPF_EN	—		IN_FILTER_SEL		—							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:13	—	Reserved
12	IN_HPF_EN	High-pass filter enable. 0 = (Default) HPF disabled 1 = HPF enabled
11:10	—	Reserved
9:8	IN_FILTER_SEL	Digital filter select. Configures the decimation filter. 00 = (Default) Minimum phase, slow roll-off decimation filter 01 = Minimum phase, fast roll-off decimation filter 10 = Linear phase, slow roll-off decimation filter 11 = Linear phase, fast roll-off decimation filter
7:0	—	Reserved

**7.3.4 IN\_HIZ**
**Address: 0x0000 0088**

RW	15...8	7	6	5	4	3	2	1	0	
	—						IN34_HIZ	IN12_HIZ		
Default	0x00	0	0	0	0	0	0	0	0	

Bits	Name	Description
15:2	—	Reserved
1	IN34_HIZ	Channel 3-4 input impedance select. 0 = (Default) Mid Impedance 1 = High Impedance
0	IN12_HIZ	Channel 1-2 input impedance select. 0 = (Default) Mid Impedance 1 = High Impedance

**7.3.5 IN\_INV**
**Address: 0x0000 008A**

RW	15...8	7	6	5	4	3	2	1	0	
	—						IN4_INV	IN3_INV	IN2_INV	IN1_INV
Default	0x00	0	0	0	0	0	0	0	0	

Bits	Name	Description
15:4	—	Reserved
3	IN4_INV	Channel 4 ADC invert. 0 = (Default) No inversion 1 = ADC data invert
2	IN3_INV	Channel 3 ADC invert. 0 = (Default) No inversion 1 = ADC data invert
1	IN2_INV	Channel 2 ADC invert. 0 = (Default) No inversion 1 = ADC data invert
0	IN1_INV	Channel 1 ADC invert. 0 = (Default) No inversion 1 = ADC data invert

**7.3.6 IN\_VOL\_CTRL1\_0**
**Address: 0x0000 0090**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	IN1_MUTE				—				IN1_VOL							
Default	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	IN1_MUTE	Channel 1 mute. 0 = Unmute 1 = (Default) Mute
14:8	—	Reserved
7:0	IN1_VOL	Channel 1 digital volume, –127.5dB to 0dB in 0.5dB steps. 0x00 = (Default) 0.0 dB 0x01 = –0.5 dB ... 0xFF = –127.5 dB

**7.3.7 IN\_VOL\_CTRL1\_1**
**Address: 0x0000 0092**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	IN2_MUTE				—				IN2_VOL							
Default	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	IN2_MUTE	Channel 2 mute. 0 = Unmute 1 = (Default) Mute
14:8	—	Reserved
7:0	IN2_VOL	Channel 2 digital volume, –127.5dB to 0dB in 0.5dB steps. 0x00 = (Default) 0.0 dB 0x01 = –0.5 dB ... 0xFF = –127.5 dB

**7.3.8 IN\_VOL\_CTRL2\_0**
**Address: 0x0000 0094**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	IN3_MUTE				—				IN3_VOL							
Default	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	IN3_MUTE	Channel 3 mute. 0 = Unmute 1 = (Default) Mute
14:8	—	Reserved
7:0	IN3_VOL	Channel 3 digital volume, –127.5dB to 0dB in 0.5dB steps. 0x00 = (Default) 0.0 dB 0x01 = –0.5 dB ... 0xFF = –127.5 dB

**7.3.9 IN\_VOL\_CTRL2\_1**
**Address: 0x0000 0096**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	IN4_MUTE				—				IN4_VOL							
Default	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	IN4_MUTE	Channel 4 mute. 0 = Unmute 1 = (Default) Mute
14:8	—	Reserved
7:0	IN4_VOL	Channel 4 digital volume, –127.5dB to 0dB in 0.5dB steps. 0x00 = (Default) 0.0 dB 0x01 = –0.5 dB ... 0xFF = –127.5 dB

**7.3.10 IN\_VOL\_CTRL5**
**Address: 0x0000 00A0**

WO	15...8	7	6	5	4	3	2	1	0
	—	—							IN_VU
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:1	—	Reserved
0	IN_VU	Global volume update trigger 0 = (Default) No action 1 = Write 1 to trigger an update of all input volume/mute registers

**7.4 CTRL\_KEYS**
**7.4.1 USER\_KEY\_CTRL**
**Address: 0x0000 0104**

WO	15...8	7	6	5	4	3	2	1	0
	—	USER_KEY_CTRL							
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:8	—	Reserved
7:0	USER_KEY_CTRL	User Key control – enables access to locked registers Write 0xAA, then 0x55, to set the key (registers unlocked) Write any other value to clear the key (registers locked)

**7.5 HGC**
**7.5.1 CONTROL**
**Address: 0x0000 2000**

WO	15...8	7	6	5	4	3	2	1	0
	—	—	ABORT			—	INIT_UPDATE		
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:5	—	Reserved
4	ABORT	Abort gain updates. Write 1 to abort any pending gain updates. Note that any updates already in progress will complete as normal and are not aborted. 0 = (Default) No action 1 = Write 1 to abort gain updates
3:1	—	Reserved
0	INIT_UPDATE	Initialize gain settings. Write 1 to transmit the SPI bit patterns and initialize all gain settings. Note the zero-cross detection is not applied when initializing gain settings. 0 = (Default) No action 1 = Write 1 to initialize gain settings

**7.5.2 STATUS**
**Address: 0x0000 2004**

RO	15...8	7	6	5	4	3	2	1	0
	—	—							BUSY_STS
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:1	—	Reserved
0	BUSY_STS	Busy status. Indicates gain updates are pending for one or more audio channels. 0 = (Default) Idle 1 = Busy



Bits	Name	Description
2	CH3_TM_LD_EN	Channel 3 transient masking level-detect enable. 0 = Disabled 1 = (Default) Enabled
1	CH2_TM_LD_EN	Channel 2 transient masking level-detect enable. 0 = Disabled 1 = (Default) Enabled
0	CH1_TM_LD_EN	Channel 1 transient masking level-detect enable. 0 = Disabled 1 = (Default) Enabled

### 7.5.7 TM\_LD\_1

**Address: 0x000 201E**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—			TM_LD_THRESH					—			TM_LD_TIME				
Default	0	0	0	0	1	0	0	1	0	0	0	0	1	1	0	0

Bits	Name	Description																
15:13	—	Reserved																
12:8	TM_LD_THRESH	Transient masking level-detect threshold. Transient masking is applied if the signal level is below the threshold. Signal levels listed are the approximate RMS level of a sine wave that would be detected as just above the threshold.  <table border="0"> <tr> <td>0x00–0x02 = Reserved</td> <td>0x0E = –86 dBFS</td> </tr> <tr> <td>0x03 = –20 dBFS</td> <td>0x0F = –92 dBFS</td> </tr> <tr> <td>0x04 = –26 dBFS</td> <td>0x10 = –98 dBFS</td> </tr> <tr> <td>0x05 = –32 dBFS</td> <td>0x11 = –104 dBFS</td> </tr> <tr> <td>0x06 = –38 dBFS</td> <td>0x12 = –110 dBFS</td> </tr> <tr> <td>...</td> <td>0x13 = –116 dBFS</td> </tr> <tr> <td>0x09 = (Default) –56 dBFS</td> <td>0x14–0x1F = Reserved</td> </tr> <tr> <td>...</td> <td></td> </tr> </table>	0x00–0x02 = Reserved	0x0E = –86 dBFS	0x03 = –20 dBFS	0x0F = –92 dBFS	0x04 = –26 dBFS	0x10 = –98 dBFS	0x05 = –32 dBFS	0x11 = –104 dBFS	0x06 = –38 dBFS	0x12 = –110 dBFS	...	0x13 = –116 dBFS	0x09 = (Default) –56 dBFS	0x14–0x1F = Reserved	...	
0x00–0x02 = Reserved	0x0E = –86 dBFS																	
0x03 = –20 dBFS	0x0F = –92 dBFS																	
0x04 = –26 dBFS	0x10 = –98 dBFS																	
0x05 = –32 dBFS	0x11 = –104 dBFS																	
0x06 = –38 dBFS	0x12 = –110 dBFS																	
...	0x13 = –116 dBFS																	
0x09 = (Default) –56 dBFS	0x14–0x1F = Reserved																	
...																		
7:5	—	Reserved																
4:0	TM_LD_TIME	Transient masking level-detect time constant. The time constant is defined in audio sample (1/fs) units.  <table border="0"> <tr> <td>0x00–0x09 = Reserved</td> <td>0x0E = 16384 samples</td> </tr> <tr> <td>0x0A = 1024 samples</td> <td>0x0F = 32768 samples</td> </tr> <tr> <td>0x0B = 2048 samples</td> <td>0x10 = 65536 samples</td> </tr> <tr> <td>0x0C = (Default) 4096 samples</td> <td>0x11–0x1F = Reserved</td> </tr> <tr> <td>0x0D = 8192 samples</td> <td></td> </tr> </table>	0x00–0x09 = Reserved	0x0E = 16384 samples	0x0A = 1024 samples	0x0F = 32768 samples	0x0B = 2048 samples	0x10 = 65536 samples	0x0C = (Default) 4096 samples	0x11–0x1F = Reserved	0x0D = 8192 samples							
0x00–0x09 = Reserved	0x0E = 16384 samples																	
0x0A = 1024 samples	0x0F = 32768 samples																	
0x0B = 2048 samples	0x10 = 65536 samples																	
0x0C = (Default) 4096 samples	0x11–0x1F = Reserved																	
0x0D = 8192 samples																		

### 7.5.8 SPI\_0

**Address: 0x000 2020**

RW	15...8	7	6	5	4	3	2	1	0	
	—				SCK_DIV		—		CPHA	CPOL
Default	0x00	0	0	0	0	0	0	0	0	

Bits	Name	Description																
15:8	—	Reserved																
7:4	SCK_DIV	SPI clock divider. Configures the SPI clock frequency as a division of the system clock frequency. For 48 kHz-related sample rates, the system-clock frequency is 24.576 MHz. For 44.1 kHz-related sample rates, the system-clock frequency is 22.5792 MHz.  <table border="0"> <tr> <td>0x0 = (Default) Divide by 2</td> <td>0x8 = Divide by 18</td> </tr> <tr> <td>0x1 = Divide by 4</td> <td>0x9 = Divide by 20</td> </tr> <tr> <td>0x2 = Divide by 6</td> <td>0xA = Divide by 22</td> </tr> <tr> <td>0x3 = Divide by 8</td> <td>0xB = Divide by 24</td> </tr> <tr> <td>0x4 = Divide by 10</td> <td>0xC = Divide by 26</td> </tr> <tr> <td>0x5 = Divide by 12</td> <td>0xD = Divide by 28</td> </tr> <tr> <td>0x6 = Divide by 14</td> <td>0xE = Divide by 30</td> </tr> <tr> <td>0x7 = Divide by 16</td> <td>0xF = Divide by 32</td> </tr> </table>	0x0 = (Default) Divide by 2	0x8 = Divide by 18	0x1 = Divide by 4	0x9 = Divide by 20	0x2 = Divide by 6	0xA = Divide by 22	0x3 = Divide by 8	0xB = Divide by 24	0x4 = Divide by 10	0xC = Divide by 26	0x5 = Divide by 12	0xD = Divide by 28	0x6 = Divide by 14	0xE = Divide by 30	0x7 = Divide by 16	0xF = Divide by 32
0x0 = (Default) Divide by 2	0x8 = Divide by 18																	
0x1 = Divide by 4	0x9 = Divide by 20																	
0x2 = Divide by 6	0xA = Divide by 22																	
0x3 = Divide by 8	0xB = Divide by 24																	
0x4 = Divide by 10	0xC = Divide by 26																	
0x5 = Divide by 12	0xD = Divide by 28																	
0x6 = Divide by 14	0xE = Divide by 30																	
0x7 = Divide by 16	0xF = Divide by 32																	
3:2	—	Reserved																
1	CPHA	SPI clock phase select (CPHA) 0 = (Default) Negative SPI clock phase 1 = Positive SPI clock phase																
0	CPOL	SPI clock polarity select (CPOL) 0 = (Default) Negative SPI clock polarity 1 = Positive SPI clock polarity																

**7.5.9 SPI\_1**
**Address: 0x0000 2022**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—				CS_IDLE_DUR				CS_RISE_DELAY				CS_FALL_DELAY			
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description																
15:12	—	Reserved																
11:8	CS_IDLE_DUR	<p>Minimum idle duration between SPI transactions (from CS rising edge to CS falling edge). The duration is defined in system-clock cycles.</p> <p>For 48 kHz-related sample rates, the system-clock period is 1/24.576 MHz. For 44.1 kHz-related sample rates, the system-clock period is 1/22.5792 MHz.</p> <table> <tr> <td>0x0 = (Default) 32 clock cycles</td> <td>0x8 = 96 clock cycles</td> </tr> <tr> <td>0x1 = 36 clock cycles</td> <td>0x9 = 128 clock cycles</td> </tr> <tr> <td>0x2 = 40 clock cycles</td> <td>0xA = 160 clock cycles</td> </tr> <tr> <td>0x3 = 44 clock cycles</td> <td>0xB = 224 clock cycles</td> </tr> <tr> <td>0x4 = 48 clock cycles</td> <td>0xC = 288 clock cycles</td> </tr> <tr> <td>0x5 = 56 clock cycles</td> <td>0xD = 416 clock cycles</td> </tr> <tr> <td>0x6 = 64 clock cycles</td> <td>0xE = 544 clock cycles</td> </tr> <tr> <td>0x7 = 80 clock cycles</td> <td>0xF = 800 clock cycles</td> </tr> </table>	0x0 = (Default) 32 clock cycles	0x8 = 96 clock cycles	0x1 = 36 clock cycles	0x9 = 128 clock cycles	0x2 = 40 clock cycles	0xA = 160 clock cycles	0x3 = 44 clock cycles	0xB = 224 clock cycles	0x4 = 48 clock cycles	0xC = 288 clock cycles	0x5 = 56 clock cycles	0xD = 416 clock cycles	0x6 = 64 clock cycles	0xE = 544 clock cycles	0x7 = 80 clock cycles	0xF = 800 clock cycles
0x0 = (Default) 32 clock cycles	0x8 = 96 clock cycles																	
0x1 = 36 clock cycles	0x9 = 128 clock cycles																	
0x2 = 40 clock cycles	0xA = 160 clock cycles																	
0x3 = 44 clock cycles	0xB = 224 clock cycles																	
0x4 = 48 clock cycles	0xC = 288 clock cycles																	
0x5 = 56 clock cycles	0xD = 416 clock cycles																	
0x6 = 64 clock cycles	0xE = 544 clock cycles																	
0x7 = 80 clock cycles	0xF = 800 clock cycles																	
7:4	CS_RISE_DELAY	<p>Chip Select (CS) rise delay. Configures the minimum time from SCLK active edge to CS rising edge (end of SPI transaction). The delay is defined in system-clock cycles.</p> <p>For 48 kHz-related sample rates, the system-clock period is 1/24.576 MHz. For 44.1 kHz-related sample rates, the system-clock period is 1/22.5792 MHz.</p> <table> <tr> <td>0x0 = (Default) 2 clock cycles</td> <td>0x8 = 18 clock cycles</td> </tr> <tr> <td>0x1 = 4 clock cycles</td> <td>0x9 = 20 clock cycles</td> </tr> <tr> <td>0x2 = 6 clock cycles</td> <td>0xA = 22 clock cycles</td> </tr> <tr> <td>0x3 = 8 clock cycles</td> <td>0xB = 24 clock cycles</td> </tr> <tr> <td>0x4 = 10 clock cycles</td> <td>0xC = 26 clock cycles</td> </tr> <tr> <td>0x5 = 12 clock cycles</td> <td>0xD = 28 clock cycles</td> </tr> <tr> <td>0x6 = 14 clock cycles</td> <td>0xE = 30 clock cycles</td> </tr> <tr> <td>0x7 = 16 clock cycles</td> <td>0xF = 32 clock cycles</td> </tr> </table>	0x0 = (Default) 2 clock cycles	0x8 = 18 clock cycles	0x1 = 4 clock cycles	0x9 = 20 clock cycles	0x2 = 6 clock cycles	0xA = 22 clock cycles	0x3 = 8 clock cycles	0xB = 24 clock cycles	0x4 = 10 clock cycles	0xC = 26 clock cycles	0x5 = 12 clock cycles	0xD = 28 clock cycles	0x6 = 14 clock cycles	0xE = 30 clock cycles	0x7 = 16 clock cycles	0xF = 32 clock cycles
0x0 = (Default) 2 clock cycles	0x8 = 18 clock cycles																	
0x1 = 4 clock cycles	0x9 = 20 clock cycles																	
0x2 = 6 clock cycles	0xA = 22 clock cycles																	
0x3 = 8 clock cycles	0xB = 24 clock cycles																	
0x4 = 10 clock cycles	0xC = 26 clock cycles																	
0x5 = 12 clock cycles	0xD = 28 clock cycles																	
0x6 = 14 clock cycles	0xE = 30 clock cycles																	
0x7 = 16 clock cycles	0xF = 32 clock cycles																	
3:0	CS_FALL_DELAY	<p>Chip Select (CS) fall delay. Configures the minimum time from CS falling edge (start of SPI transaction) to the first SCK edge. The delay is defined in system-clock cycles.</p> <p>For 48 kHz-related sample rates, the system-clock period is 1/24.576 MHz. For 44.1 kHz-related sample rates, the system-clock period is 1/22.5792 MHz.</p> <p>The delay is dependent on the SPI clock divider (SCK_DIV) setting – the 'N' variable in the enumeration represents the value of SCK_DIV field (0-15).</p> <table> <tr> <td>0x0 = (Default) 3+N clock cycles</td> <td>0x8 = 19+N clock cycles</td> </tr> <tr> <td>0x1 = 5+N clock cycles</td> <td>0x9 = 21+N clock cycles</td> </tr> <tr> <td>0x2 = 7+N clock cycles</td> <td>0xA = 23+N clock cycles</td> </tr> <tr> <td>0x3 = 9+N clock cycles</td> <td>0xB = 25+N clock cycles</td> </tr> <tr> <td>0x4 = 11+N clock cycles</td> <td>0xC = 27+N clock cycles</td> </tr> <tr> <td>0x5 = 13+N clock cycles</td> <td>0xD = 29+N clock cycles</td> </tr> <tr> <td>0x6 = 15+N clock cycles</td> <td>0xE = 31+N clock cycles</td> </tr> <tr> <td>0x7 = 17+N clock cycles</td> <td>0xF = 33+N clock cycles</td> </tr> </table>	0x0 = (Default) 3+N clock cycles	0x8 = 19+N clock cycles	0x1 = 5+N clock cycles	0x9 = 21+N clock cycles	0x2 = 7+N clock cycles	0xA = 23+N clock cycles	0x3 = 9+N clock cycles	0xB = 25+N clock cycles	0x4 = 11+N clock cycles	0xC = 27+N clock cycles	0x5 = 13+N clock cycles	0xD = 29+N clock cycles	0x6 = 15+N clock cycles	0xE = 31+N clock cycles	0x7 = 17+N clock cycles	0xF = 33+N clock cycles
0x0 = (Default) 3+N clock cycles	0x8 = 19+N clock cycles																	
0x1 = 5+N clock cycles	0x9 = 21+N clock cycles																	
0x2 = 7+N clock cycles	0xA = 23+N clock cycles																	
0x3 = 9+N clock cycles	0xB = 25+N clock cycles																	
0x4 = 11+N clock cycles	0xC = 27+N clock cycles																	
0x5 = 13+N clock cycles	0xD = 29+N clock cycles																	
0x6 = 15+N clock cycles	0xE = 31+N clock cycles																	
0x7 = 17+N clock cycles	0xF = 33+N clock cycles																	

**7.5.10 CH1\_CONFIG**
**Address: 0x0000 2030**

RW	15...8	7	6	5	4	3	2	1	0
	—	—		CH1_BIT_PATT_LENGTH					
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description						
15:6	—	Reserved						
5:0	CH1_BIT_PATT_LENGTH	<p>Channel 1 bit-pattern length for SPI gain control</p> <table> <tr> <td>0x00 = (Default) 0 bits (device not present)</td> <td>...</td> </tr> <tr> <td>0x01 = 1 bits</td> <td>0x20 = 32 bits</td> </tr> <tr> <td>0x02 = 2 bits</td> <td>0x21–0x3F = Reserved</td> </tr> </table>	0x00 = (Default) 0 bits (device not present)	...	0x01 = 1 bits	0x20 = 32 bits	0x02 = 2 bits	0x21–0x3F = Reserved
0x00 = (Default) 0 bits (device not present)	...							
0x01 = 1 bits	0x20 = 32 bits							
0x02 = 2 bits	0x21–0x3F = Reserved							

**7.5.11 CH2\_CONFIG**
**Address: 0x0000 2034**

RW	15...8	7	6	5	4	3	2	1	0
	—	—				CH2_BIT_PATT_LENGTH			
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:6	—	Reserved
5:0	CH2_BIT_PATT_LENGTH	Channel 2 bit-pattern length for SPI gain control 0x00 = (Default) 0 bits (device not present) 0x01 = 1 bits 0x02 = 2 bits ... 0x20 = 32 bits 0x21–0x3F = Reserved

**7.5.12 CH3\_CONFIG**
**Address: 0x0000 2038**

RW	15...8	7	6	5	4	3	2	1	0
	—	—				CH3_BIT_PATT_LENGTH			
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:6	—	Reserved
5:0	CH3_BIT_PATT_LENGTH	Channel 3 bit-pattern length for SPI gain control 0x00 = (Default) 0 bits (device not present) 0x01 = 1 bits 0x02 = 2 bits ... 0x20 = 32 bits 0x21–0x3F = Reserved

**7.5.13 CH4\_CONFIG**
**Address: 0x0000 203C**

RW	15...8	7	6	5	4	3	2	1	0
	—	—				CH4_BIT_PATT_LENGTH			
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:6	—	Reserved
5:0	CH4_BIT_PATT_LENGTH	Channel 4 bit-pattern length for SPI gain control 0x00 = (Default) 0 bits (device not present) 0x01 = 1 bits 0x02 = 2 bits ... 0x20 = 32 bits 0x21–0x3F = Reserved

**7.5.14 AUX1\_CONFIG**
**Address: 0x0000 2050**

RW	15...8	7	6	5	4	3	2	1	0
	—	—				AUX1_BIT_PATT_LENGTH			
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:6	—	Reserved
5:0	AUX1_BIT_PATT_LENGTH	Auxiliary 1 bit-pattern length for SPI aux control 0x00 = (Default) 0 bits (device not present) 0x01 = 1 bits 0x02 = 2 bits ... 0x20 = 32 bits 0x21–0x3F = Reserved

**7.5.15 AUX2\_CONFIG**
**Address: 0x0000 2054**

RW	15...8	7	6	5	4	3	2	1	0
	—	—				AUX2_BIT_PATT_LENGTH			
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:6	—	Reserved
5:0	AUX2_BIT_PATT_LENGTH	Auxiliary 2 bit-pattern length for SPI aux control 0x00 = (Default) 0 bits (device not present) 0x01 = 1 bits 0x02 = 2 bits ... 0x20 = 32 bits 0x21–0x3F = Reserved

**7.5.16 CH1\_BIT\_PATT\_0**
**Address: 0x0000 2060**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH1_BIT_PATT_0															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH1_BIT_PATT_0	Channel 1 SPI bit pattern for external gain control, bits 17-32. Only used if the bit pattern is longer than 16 bits. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 32 bits, one or more of the LSBs is unused.

**7.5.17 CH1\_BIT\_PATT\_1**
**Address: 0x0000 2062**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH1_BIT_PATT_1															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH1_BIT_PATT_1	Channel 1 SPI bit pattern for external gain control, bits 1-16. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 16 bits, one or more of the LSBs is unused.

**7.5.18 CH1\_GAIN\_0**
**Address: 0x0000 2064**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
			—						CH1_ANA_GAIN							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:11	—	Reserved
10:0	CH1_ANA_GAIN	Channel 1 analog gain. The selected value must match the external analog gain of the SPI bit pattern. 0x000 = (Default) 0.000 dB 0x001 = 0.125 dB 0x002 = 0.250 dB ... 0x23F = 71.875 dB 0x240–0x5BF = Reserved 0x5C0 = –72.000 dB ... 0x7FF = –0.125 dB

**7.5.19 CH1\_GAIN\_1**
**Address: 0x0000 2066**

	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH1_UPDATE	—							CH1_DIG_GAIN							
Access	WO	—							RW							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	CH1_UPDATE	Channel 1 gain update. Write 1 to apply the Channel 1 gain selection and SPI bit pattern. The gain update is applied at the next scheduling opportunity, zero-cross aligned.
14:8	—	Reserved
7:0	CH1_DIG_GAIN	Channel 1 digital gain. Note the signal level is also controlled by the digital volume (IN1_VOL). 0x00 = (Default) 0.000 dB 0x01 = 0.125 dB 0x02 = 0.250 dB ... 0x5F = 11.875 dB 0x60–0x9F = Reserved 0xA0 = –12.000 dB ... 0xFF = –0.125 dB

**7.5.20 CH2\_BIT\_PATT\_0**
**Address: 0x0000 2068**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH2_BIT_PATT_0															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH2_BIT_PATT_0	Channel 2 SPI bit pattern for external gain control, bits 17-32. Only used if the bit pattern is longer than 16 bits. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 32 bits, one or more of the LSBs is unused.

**7.5.21 CH2\_BIT\_PATT\_1**
**Address: 0x0000 206A**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH2_BIT_PATT_1															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH2_BIT_PATT_1	Channel 2 SPI bit pattern for external gain control, bits 1-16. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 16 bits, one or more of the LSBs is unused.

**7.5.22 CH2\_GAIN\_0**
**Address: 0x0000 206C**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
			—						CH2_ANA_GAIN							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:11	—	Reserved
10:0	CH2_ANA_GAIN	Channel 2 analog gain. The selected value must match the external analog gain of the SPI bit pattern. 0x000 = (Default) 0.000 dB 0x001 = 0.125 dB 0x002 = 0.250 dB ... 0x23F = 71.875 dB 0x240–0x5BF = Reserved 0x5C0 = –72.000 dB ... 0x7FF = –0.125 dB

**7.5.23 CH2\_GAIN\_1**
**Address: 0x0000 206E**

	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH2_UPDATE	—							CH2_DIG_GAIN							
Access	WO	—							RW							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	CH2_UPDATE	Channel 2 gain update. Write 1 to apply the Channel 2 gain selection and SPI bit pattern. The gain update is applied at the next scheduling opportunity, zero-cross aligned.
14:8	—	Reserved
7:0	CH2_DIG_GAIN	Channel 2 digital gain. Note the signal level is also controlled by the digital volume (IN2_VOL). 0x00 = (Default) 0.000 dB 0x01 = 0.125 dB 0x02 = 0.250 dB ... 0x5F = 11.875 dB 0x60–0x9F = Reserved 0xA0 = –12.000 dB ... 0xFF = –0.125 dB

**7.5.24 CH3\_BIT\_PATT\_0**
**Address: 0x0000 2070**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH3_BIT_PATT_0															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH3_BIT_PATT_0	Channel 3 SPI bit pattern for external gain control, bits 17-32. Only used if the bit pattern is longer than 16 bits. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 32 bits, one or more of the LSBs is unused.

**7.5.25 CH3\_BIT\_PATT\_1**
**Address: 0x0000 2072**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH3_BIT_PATT_1															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH3_BIT_PATT_1	Channel 3 SPI bit pattern for external gain control, bits 1-16. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 16 bits, one or more of the LSBs is unused.

**7.5.26 CH3\_GAIN\_0**
**Address: 0x0000 2074**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—				CH3_ANA_GAIN											
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:11	—	Reserved
10:0	CH3_ANA_GAIN	Channel 3 analog gain. The selected value must match the external analog gain of the SPI bit pattern. 0x000 = (Default) 0.000 dB 0x001 = 0.125 dB 0x002 = 0.250 dB ... 0x23F = 71.875 dB 0x240–0x5BF = Reserved 0x5C0 = –72.000 dB ... 0x7FF = –0.125 dB

**7.5.27 CH3\_GAIN\_1**
**Address: 0x0000 2076**

	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH3_UPDATE	—							CH3_DIG_GAIN							
Access	WO	—							RW							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	CH3_UPDATE	Channel 3 gain update. Write 1 to apply the Channel 3 gain selection and SPI bit pattern. The gain update is applied at the next scheduling opportunity, zero-cross aligned.
14:8	—	Reserved
7:0	CH3_DIG_GAIN	Channel 3 digital gain. Note the signal level is also controlled by the digital volume (IN3_VOL). 0x00 = (Default) 0.000 dB 0x01 = 0.125 dB 0x02 = 0.250 dB ... 0x5F = 11.875 dB 0x60–0x9F = Reserved 0xA0 = –12.000 dB ... 0xFF = –0.125 dB

**7.5.28 CH4\_BIT\_PATT\_0**
**Address: 0x0000 2078**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH4_BIT_PATT_0															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH4_BIT_PATT_0	Channel 4 SPI bit pattern for external gain control, bits 17-32. Only used if the bit pattern is longer than 16 bits. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 32 bits, one or more of the LSBs is unused.

**7.5.29 CH4\_BIT\_PATT\_1**
**Address: 0x0000 207A**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH4_BIT_PATT_1															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	CH4_BIT_PATT_1	Channel 4 SPI bit pattern for external gain control, bits 1-16. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 16 bits, one or more of the LSBs is unused.

**7.5.30 CH4\_GAIN\_0**
**Address: 0x0000 207C**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
			—						CH4_ANA_GAIN							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:11	—	Reserved
10:0	CH4_ANA_GAIN	Channel 4 analog gain. The selected value must match the external analog gain of the SPI bit pattern. 0x000 = (Default) 0.000 dB 0x001 = 0.125 dB 0x002 = 0.250 dB ... 0x23F = 71.875 dB 0x240–0x5BF = Reserved 0x5C0 = –72.000 dB ... 0x7FF = –0.125 dB

**7.5.31 CH4\_GAIN\_1**
**Address: 0x0000 207E**

	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	CH4_UPDATE	—							CH4_DIG_GAIN							
Access	WO	—							RW							
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15	CH4_UPDATE	Channel 4 gain update. Write 1 to apply the Channel 4 gain selection and SPI bit pattern. The gain update is applied at the next scheduling opportunity, zero-cross aligned.
14:8	—	Reserved
7:0	CH4_DIG_GAIN	Channel 4 digital gain. Note the signal level is also controlled by the digital volume (IN4_VOL). 0x00 = (Default) 0.000 dB 0x01 = 0.125 dB 0x02 = 0.250 dB ... 0x5F = 11.875 dB 0x60–0x9F = Reserved 0xA0 = –12.000 dB ... 0xFF = –0.125 dB

**7.5.32 AUX1\_BIT\_PATT\_0**
**Address: 0x0000 20A0**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	AUX1_BIT_PATT_0															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	AUX1_BIT_PATT_0	Auxiliary 1 SPI bit pattern for external gain control, bits 17-32. Only used if the bit pattern is longer than 16 bits. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 32 bits, one or more of the LSBs is unused.

**7.5.33 AUX1\_BIT\_PATT\_1**
**Address: 0x0000 20A2**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	AUX1_BIT_PATT_1															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	AUX1_BIT_PATT_1	Auxiliary 1 SPI bit pattern for external gain control, bits 1-16. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 16 bits, one or more of the LSBs is unused.

**7.5.34 AUX2\_BIT\_PATT\_0**
**Address: 0x0000 20A4**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	AUX2_BIT_PATT_0															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	AUX2_BIT_PATT_0	Auxiliary 2 SPI bit pattern for external gain control, bits 17-32. Only used if the bit pattern is longer than 16 bits. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 32 bits, one or more of the LSBs is unused.

**7.5.35 AUX2\_BIT\_PATT\_1**
**Address: 0x0000 20A6**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	AUX2_BIT_PATT_1															
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:0	AUX2_BIT_PATT_1	Auxiliary 2 SPI bit pattern for external gain control, bits 1-16. The contents of the bit pattern must be left-aligned such that the first bit for transmission is in the MSB. If the bit pattern is shorter than 16 bits, one or more of the LSBs is unused.

**7.6 PIN\_CONFIG**
**7.6.1 PAD\_DRV1\_0**
**Address: 0x0000 3D10**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
	—	ASP_DOUT1_DRV	—	ASP_FSYNC_DRV	—	ASP_BCLK_DRV	—	—	—	—	—	—	—	—	—	—
Default	0	1	1	1	0	0	1	1	0	0	1	1	0	0	1	1

Bits	Name	Description
15	—	Reserved
14:12	ASP_DOUT1_DRV	ASP_DOUT1 output drive strength 000 = 2 mA 001 = 4 mA 010 = 6 mA 011 = 8 mA 100 = 10 mA 101 = 12 mA 110 = 14 mA 111 = (Default) 16 mA
11	—	Reserved





Bits	Name	Description
5	CONFIG2_CLIP_EN	CONFIG2 pin function select 0 = (Default) HW config 1 = Clip-detect output
4	—	Reserved
3	SPI_CS_CLIP_EN	SPI_CS pin function select 0 = (Default) SPI_CS 1 = Clip-detect output
2	ASP_DOUT4_CLIP_EN	ASP_DOUT4 pin function select 0 = (Default) ASP_DOUT4 1 = Clip-detect output
1	ASP_DOUT3_CLIP_EN	ASP_DOUT3 pin function select 0 = (Default) ASP_DOUT3 1 = Clip-detect output
0	ASP_DOUT2_CLIP_EN	ASP_DOUT2 pin function select 0 = (Default) ASP_DOUT2 1 = Clip-detect output

**7.6.6 PAD\_HGC\_SPI**
**Address: 0x0000 3D20**

RW	15...8	7	6	5	4	3	2	1	0
	—				—				HGC_SPI_EN
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:1	—	Reserved
0	HGC_SPI_EN	HGC pin function select. Set this bit to enable the HGC function on the CONFIG2, CONFIG3, and CONFIG4 pins

**7.6.7 PAD\_FN**
**Address: 0x0000 3D24**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
				—			CONFIG5_FN	CONFIG4_FN	CONFIG3_FN	CONFIG2_FN	—	SPI_SCK_FN	SPI_CS_FN	ASP_DOUT4_FN	ASP_DOUT3_FN	ASP_DOUT2_FN
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:10	—	Reserved
9	CONFIG5_FN	CONFIG5 pin function select 0 = (Default) HW config 1 = GP output
8	CONFIG4_FN	CONFIG4 pin function select 0 = (Default) HW config/HGC_CS 1 = GP output
7	CONFIG3_FN	CONFIG3 pin function select 0 = (Default) HW config/HGC_SDO 1 = GP output
6	CONFIG2_FN	CONFIG2 pin function select 0 = (Default) HW config/HGC_SCK 1 = GP output
5	—	Reserved
4	SPI_SCK_FN	SPI_SCK pin function select 0 = (Default) SPI_SCK 1 = GP output
3	SPI_CS_FN	SPI_CS pin function select 0 = (Default) SPI_CS 1 = GP output
2	ASP_DOUT4_FN	ASP_DOUT4 pin function select 0 = (Default) ASP_DOUT4 1 = GP output

Bits	Name	Description
1	ASP_DOUT3_FN	ASP_DOUT3 pin function select 0 = (Default) ASP_DOUT3 1 = GP output
0	ASP_DOUT2_FN	ASP_DOUT2 pin function select 0 = (Default) ASP_DOUT2 1 = GP output

**7.6.8 PAD\_LVL**
**Address: 0x0000 3D28**

RW	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
				—			CONFIG5_LVL	CONFIG4_LVL	CONFIG3_LVL	CONFIG2_LVL	—	SPI_SCK_LVL	SPI_CS_LVL	ASP_DOUT4_LVL	ASP_DOUT3_LVL	ASP_DOUT2_LVL
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Bits	Name	Description
15:10	—	Reserved
9	CONFIG5_LVL	CONFIG5 output level. Sets the output level if CONFIG5 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
8	CONFIG4_LVL	CONFIG4 output level. Sets the output level if CONFIG4 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
7	CONFIG3_LVL	CONFIG3 output level. Sets the output level if CONFIG3 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
6	CONFIG2_LVL	CONFIG2 output level. Sets the output level if CONFIG2 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
5	—	Reserved
4	SPI_SCK_LVL	SPI_SCK output level. Sets the output level if SPI_SCK is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
3	SPI_CS_LVL	SPI_CS output level. Sets the output level if SPI_CS is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
2	ASP_DOUT4_LVL	ASP_DOUT4 output level. Sets the output level if ASP_DOUT4 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
1	ASP_DOUT3_LVL	ASP_DOUT3 output level. Sets the output level if ASP_DOUT3 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1
0	ASP_DOUT2_LVL	ASP_DOUT2 output level. Sets the output level if ASP_DOUT2 is configured as GP output. 0 = (Default) Logic 0 1 = Logic 1

**7.7 CLIP\_DETECT**
**7.7.1 CLIP\_WARN**
**Address: 0x0000 3E1C**

RW	15..8	7	6	5	4	3	2	1	0
	—		—		IN4_CLIP_WARN	IN3_CLIP_WARN	IN2_CLIP_WARN	IN1_CLIP_WARN	—
Default	0x00	0	0	0	0	0	0	0	0

Bits	Name	Description
15:5	—	Reserved
4	IN4_CLIP_WARN	Channel 4 clip-detect indication. Rising edge triggered. Write 1 to clear. 0 = (Default) Normal 1 = Clip detect


Bits	Name	Description
3	IN3_CLIP_WARN	Channel 3 clip-detect indication. Rising edge triggered. Write 1 to clear. 0 = (Default) Normal 1 = Clip detect
2	IN2_CLIP_WARN	Channel 2 clip-detect indication. Rising edge triggered. Write 1 to clear. 0 = (Default) Normal 1 = Clip detect
1	IN1_CLIP_WARN	Channel 1 clip-detect indication. Rising edge triggered. Write 1 to clear. 0 = (Default) Normal 1 = Clip detect
0	—	Reserved

## 8 Performance Plots


### 8.1 ADC Filter Response

The ADC filter performance is described in this section. Note the group-delay plots represent the filter only—see [Table 3-5](#) for full-path latency.


ADC Filter Response—Fast Roll-Off, 32 kHz Sample Rate

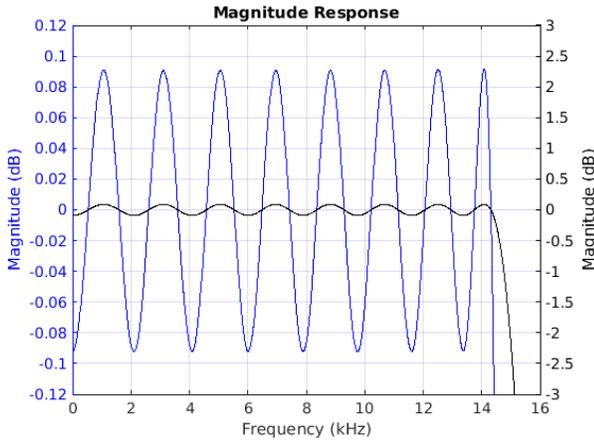


**Figure 8-1. Passband Magnitude**

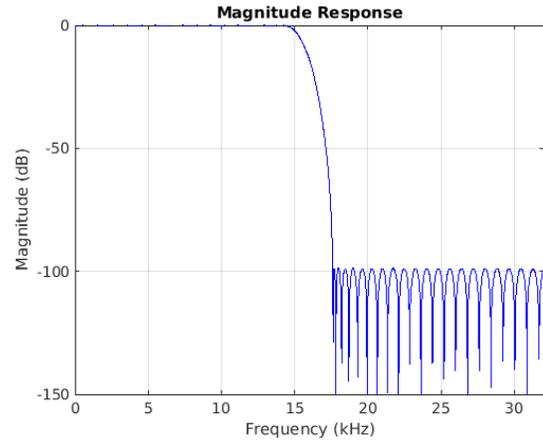


**Figure 8-2. Stopband Magnitude**

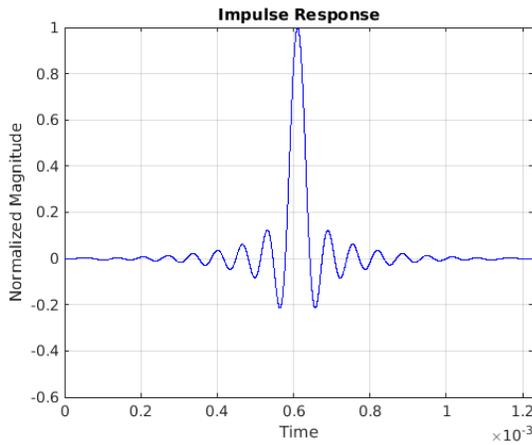


**Figure 8-3. Impulse Response—Linear Phase**

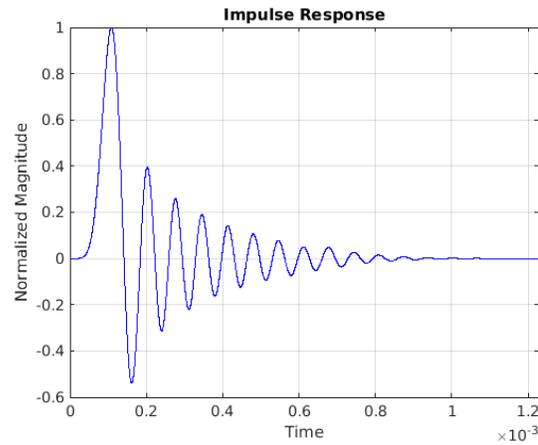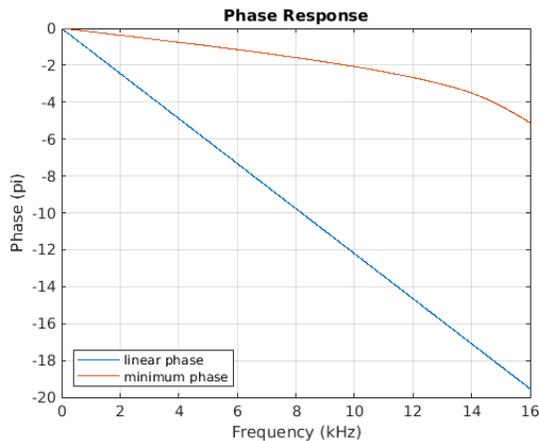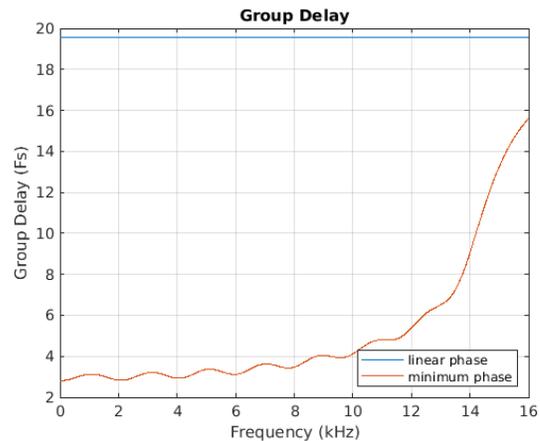

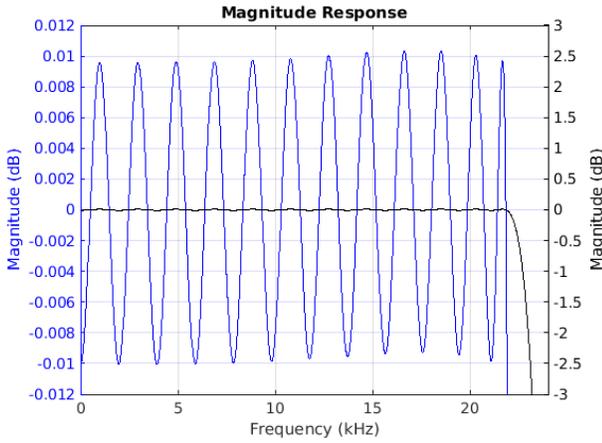
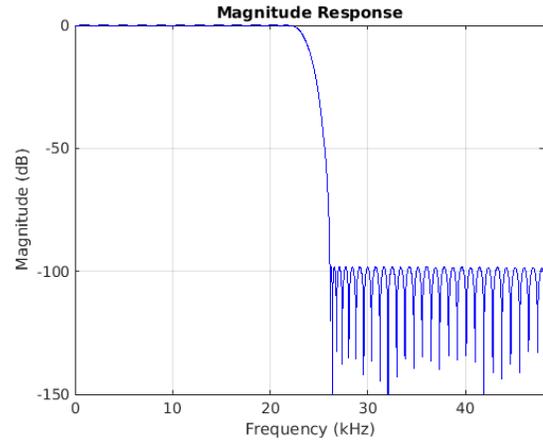
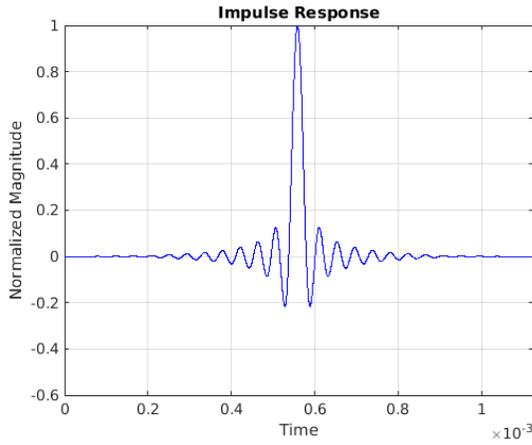
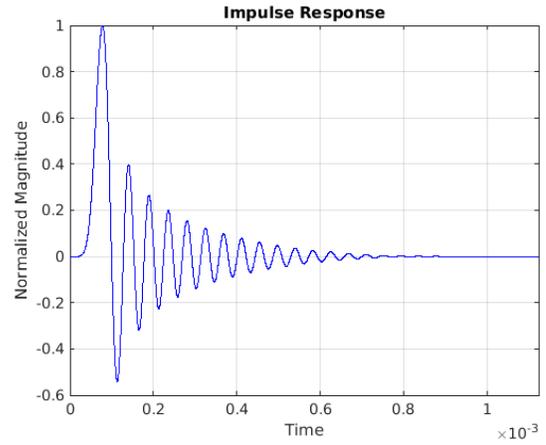
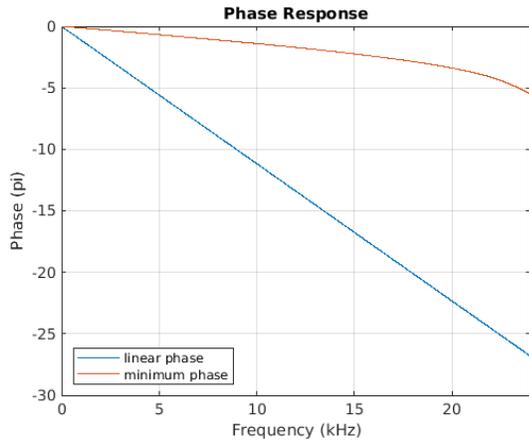
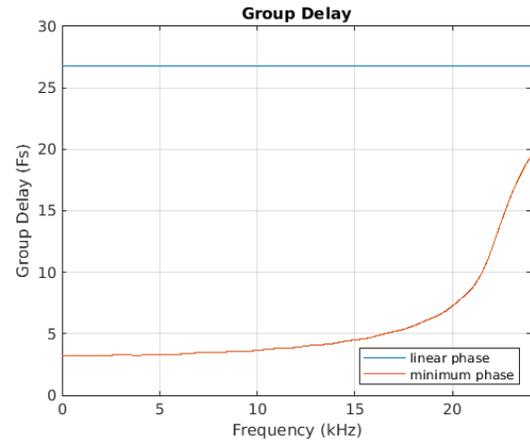
**Figure 8-4. Impulse Response—Minimum Phase**

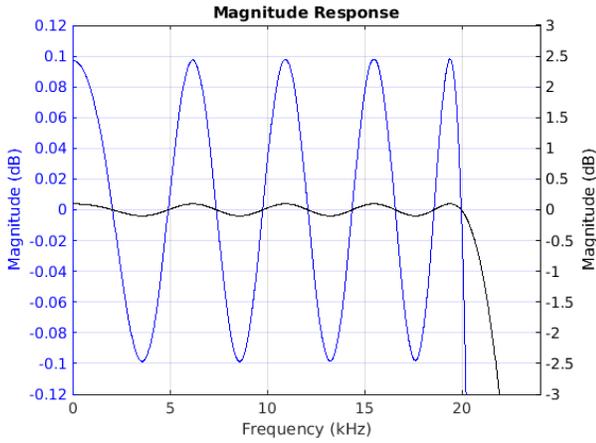
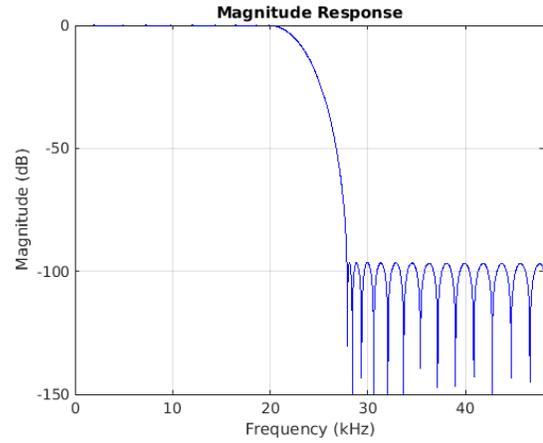
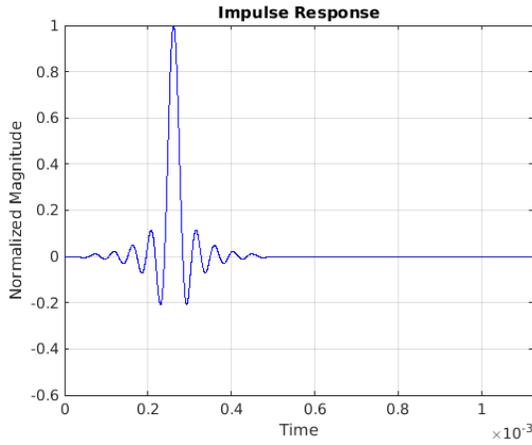
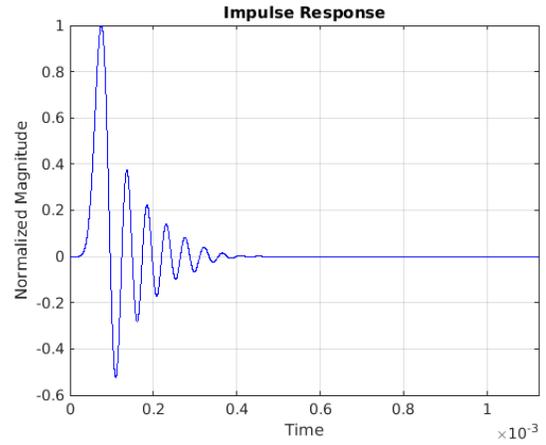
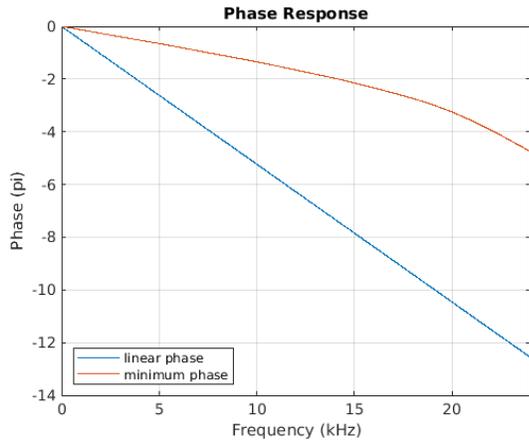
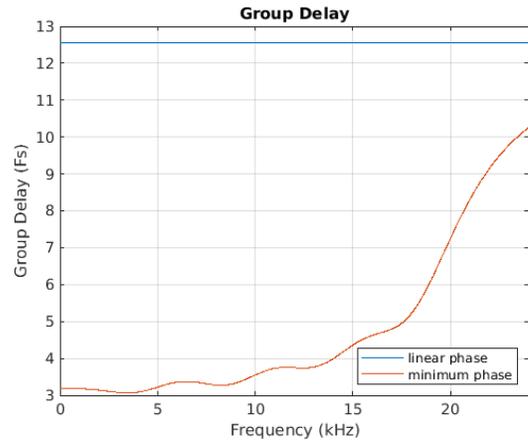


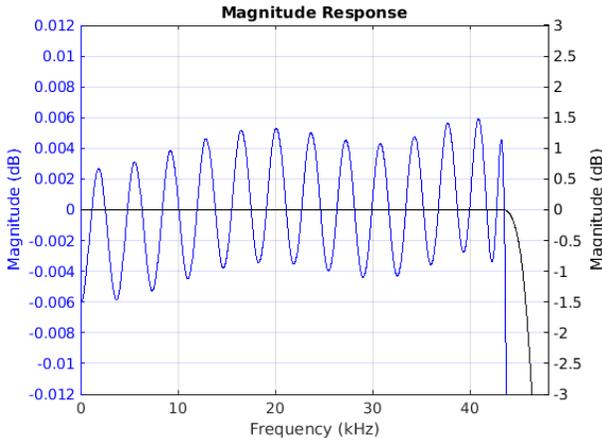
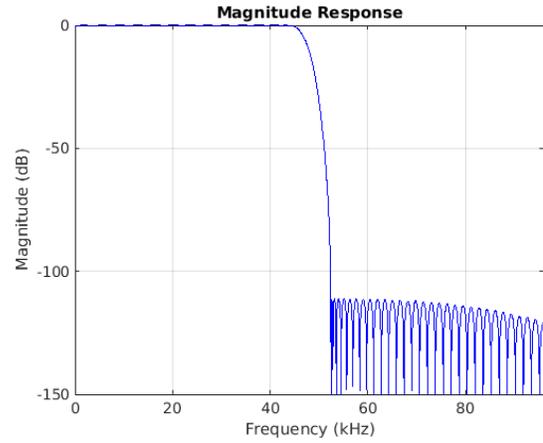
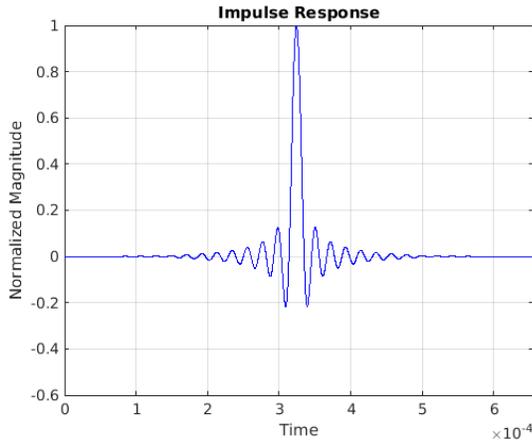
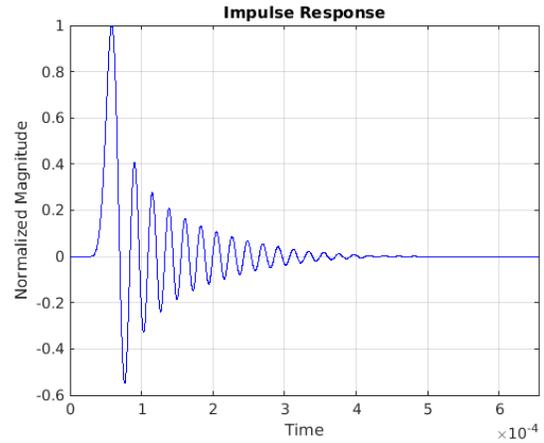
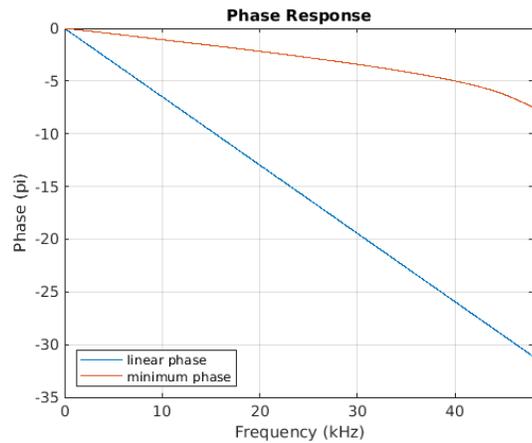
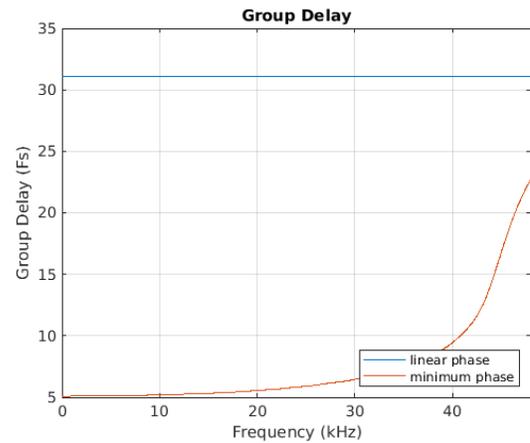
**Figure 8-5. Phase vs. Frequency**

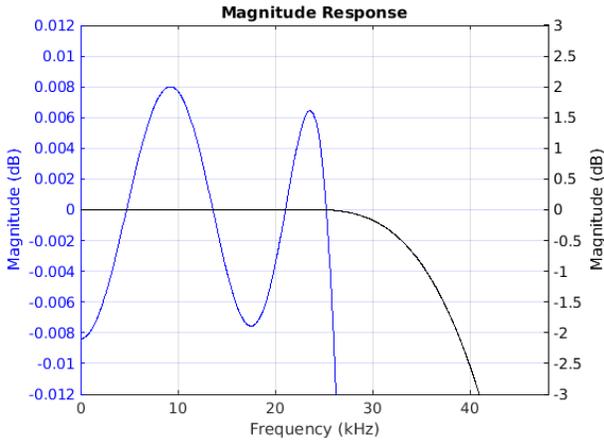
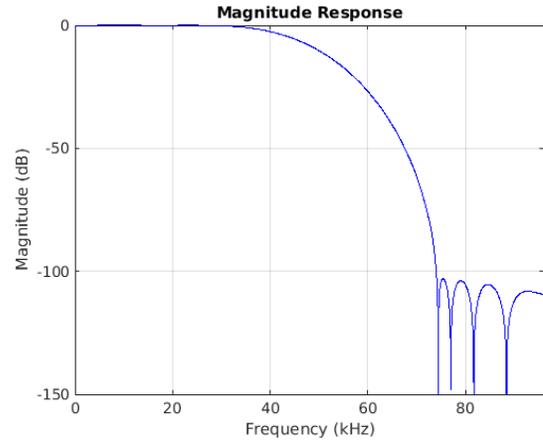
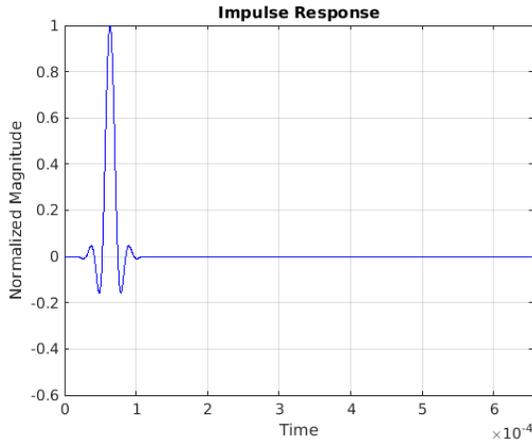
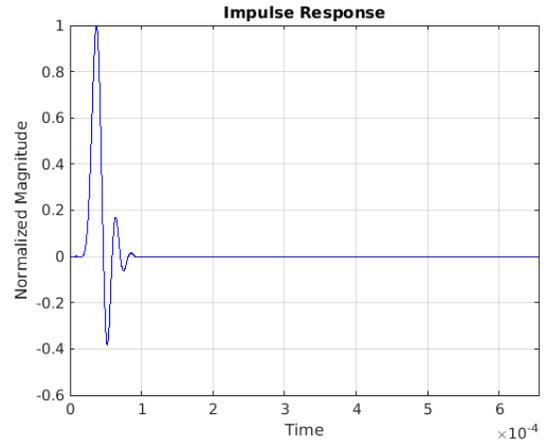
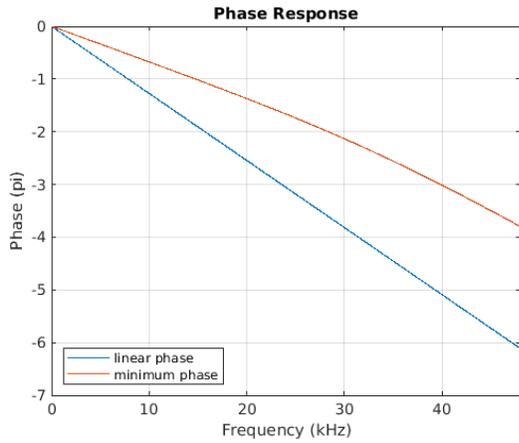
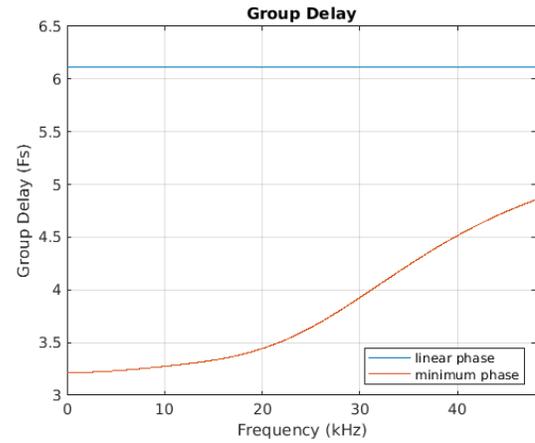


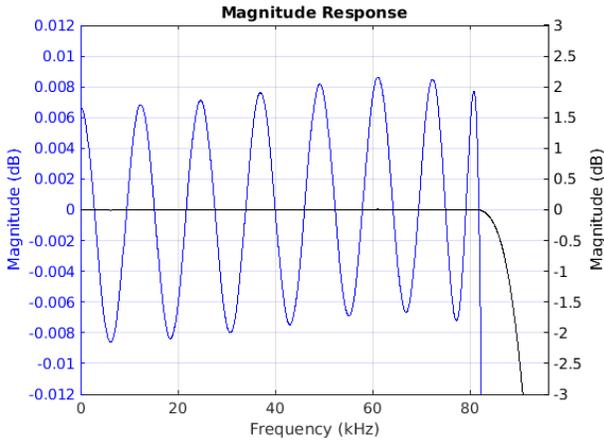
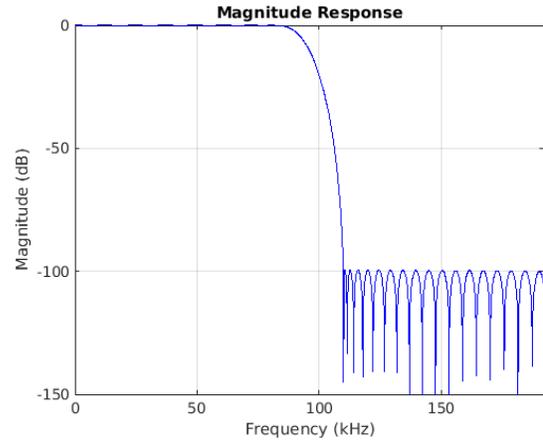
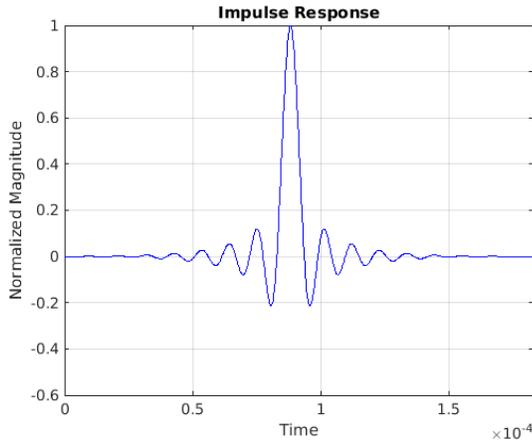
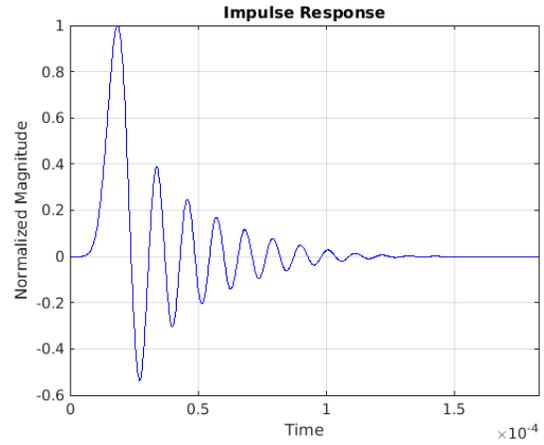
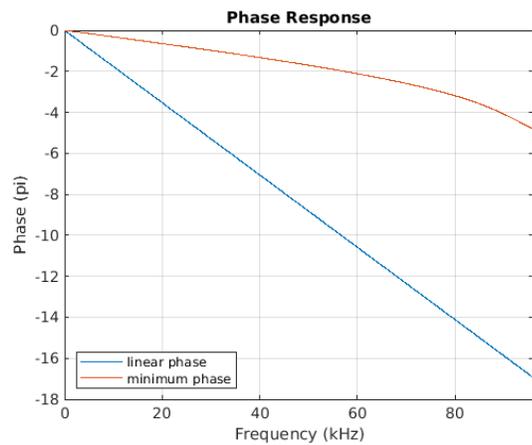
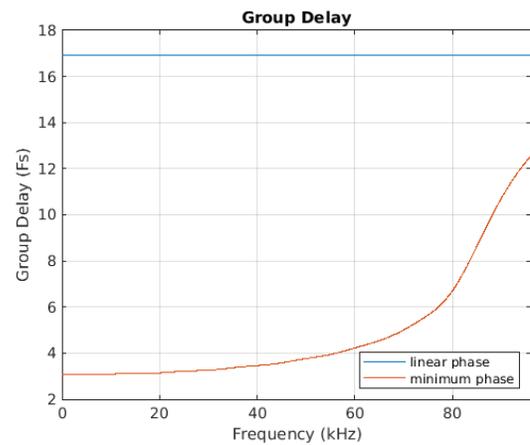
**Figure 8-6. Group Delay vs. Frequency**

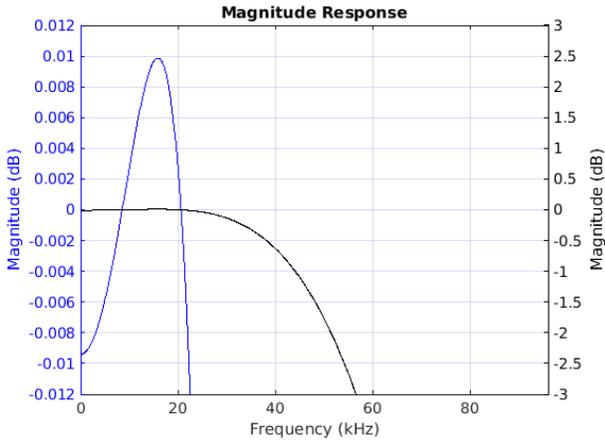
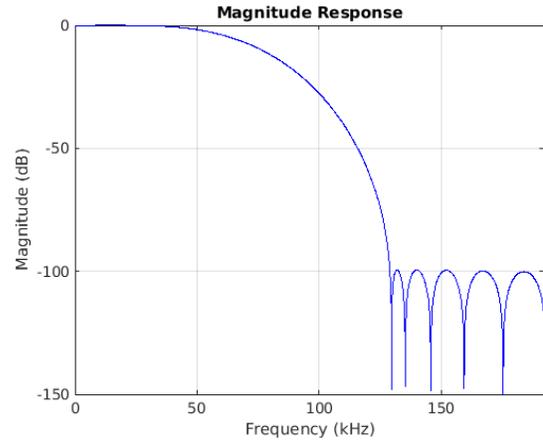
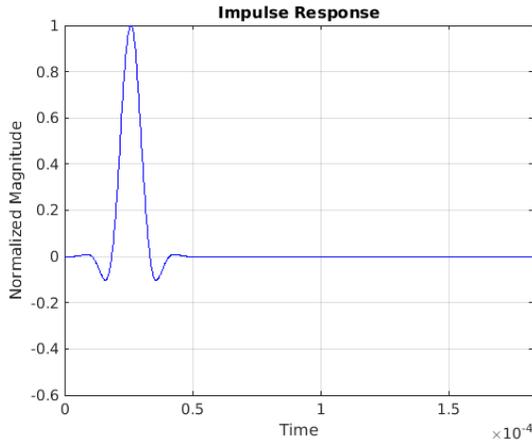
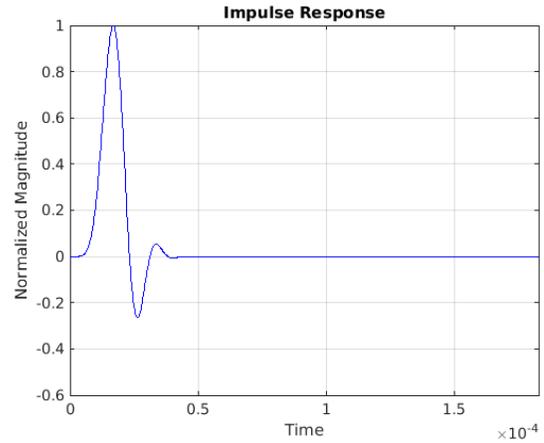
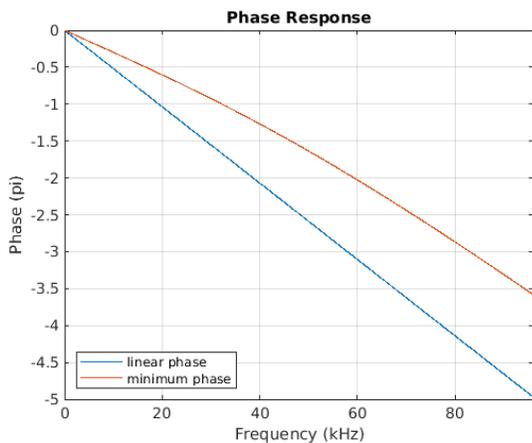
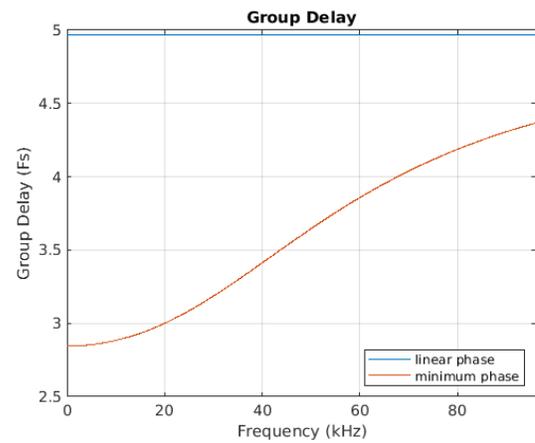
**ADC Filter Response—Fast Roll-Off, 48 kHz Sample Rate**

**Figure 8-7. Passband Magnitude**

**Figure 8-8. Stopband Magnitude**

**Figure 8-9. Impulse Response—Linear Phase**

**Figure 8-10. Impulse Response—Minimum Phase**

**Figure 8-11. Phase vs. Frequency**

**Figure 8-12. Group Delay vs. Frequency**

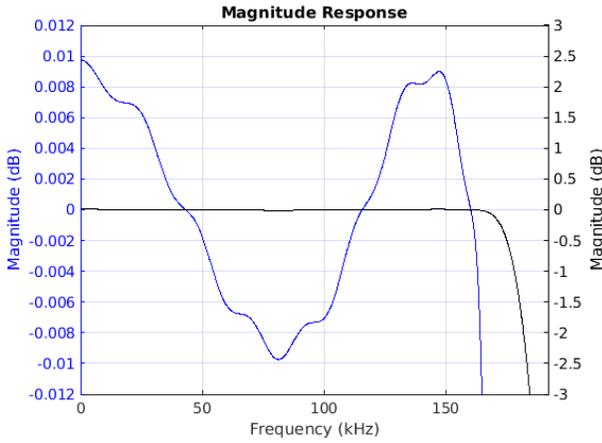
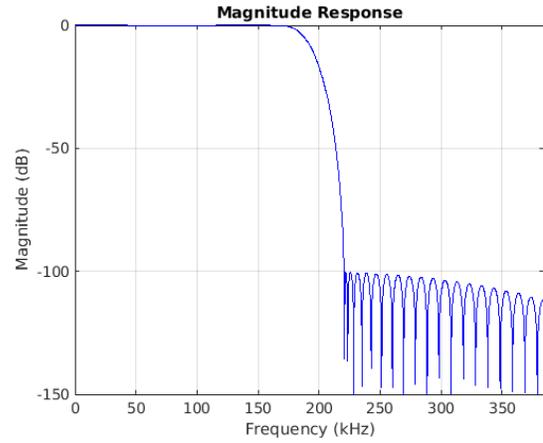
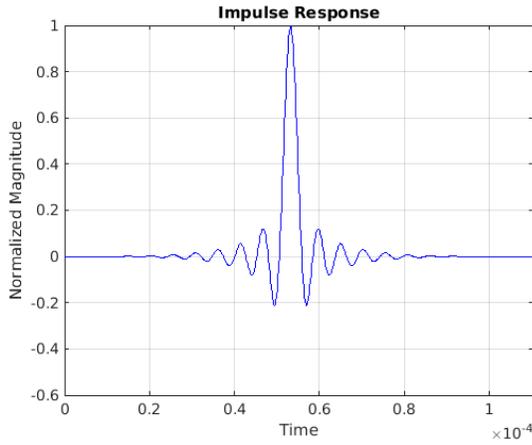
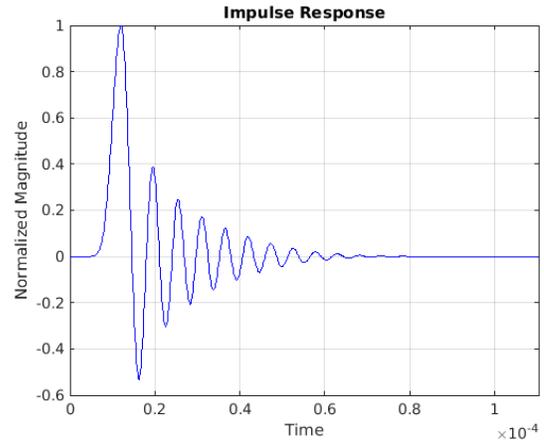
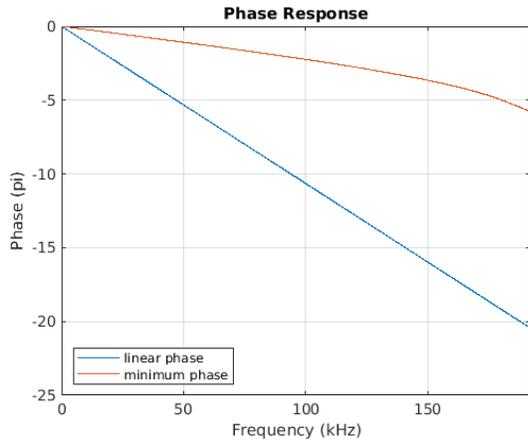
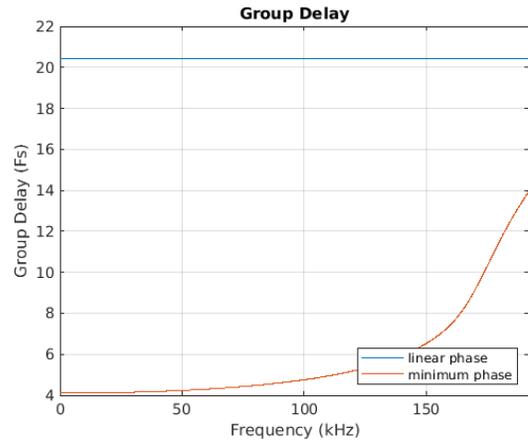
**ADC Filter Response—Slow Roll-Off, 48 kHz Sample Rate**

**Figure 8-13. Passband Magnitude**

**Figure 8-14. Stopband Magnitude**

**Figure 8-15. Impulse Response—Linear Phase**

**Figure 8-16. Impulse Response—Minimum Phase**

**Figure 8-17. Phase vs. Frequency**

**Figure 8-18. Group Delay vs. Frequency**

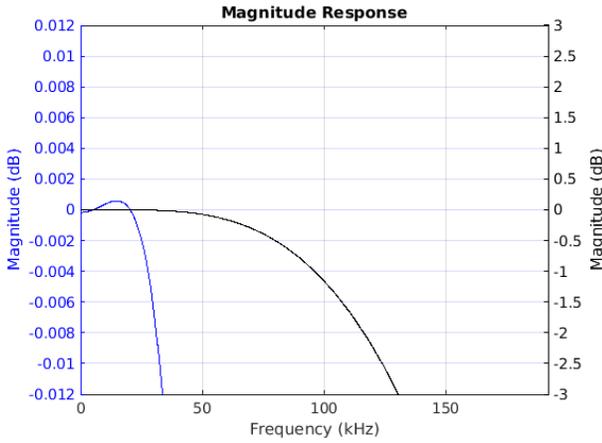
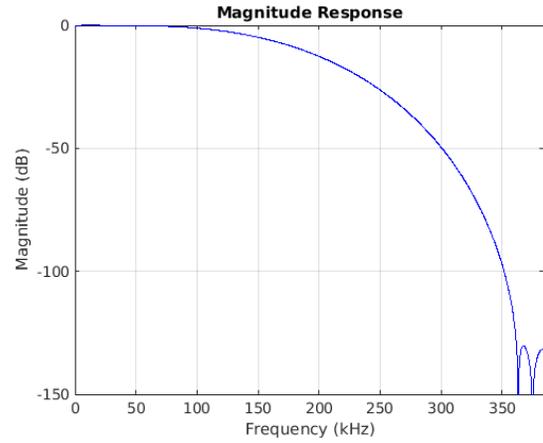
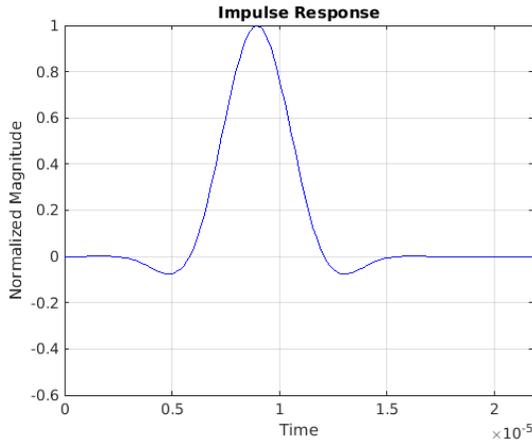
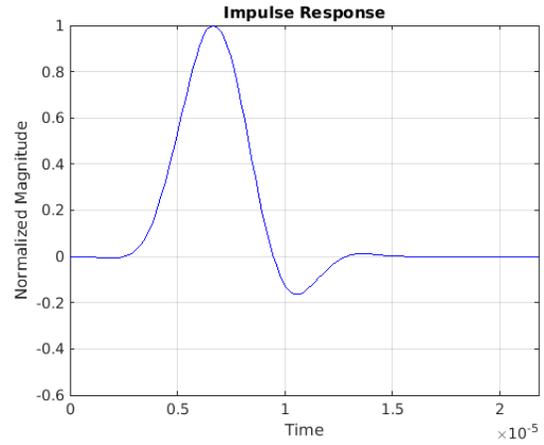
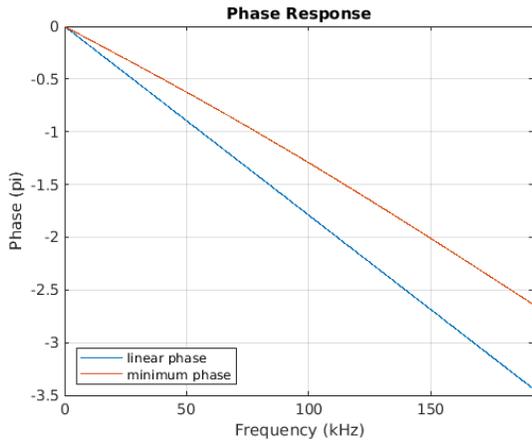
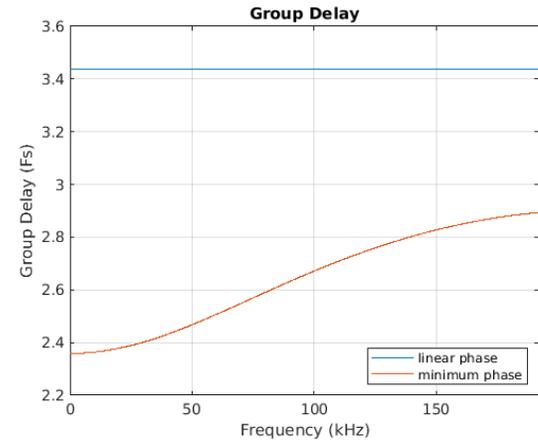
**ADC Filter Response—Fast Roll-Off, 96 kHz Sample Rate**

**Figure 8-19. Passband Magnitude**

**Figure 8-20. Stopband Magnitude**

**Figure 8-21. Impulse Response—Linear Phase**

**Figure 8-22. Impulse Response—Minimum Phase**

**Figure 8-23. Phase vs. Frequency**

**Figure 8-24. Group Delay vs. Frequency**

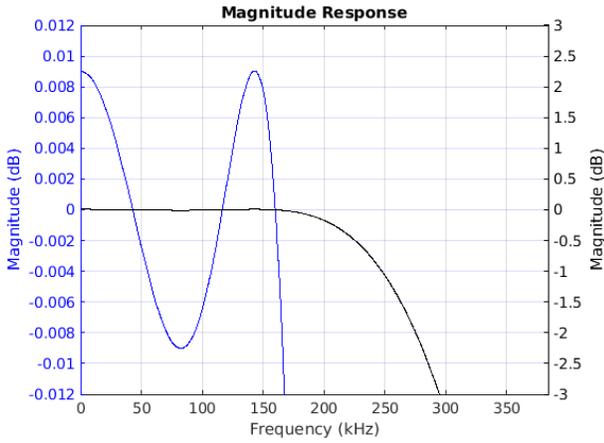
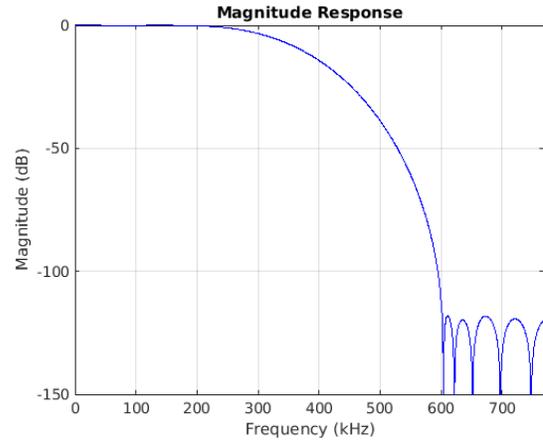
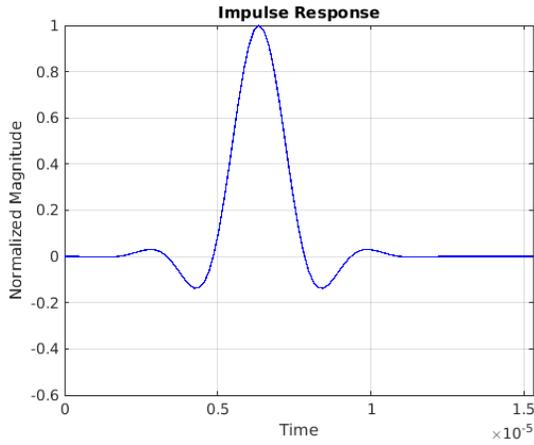
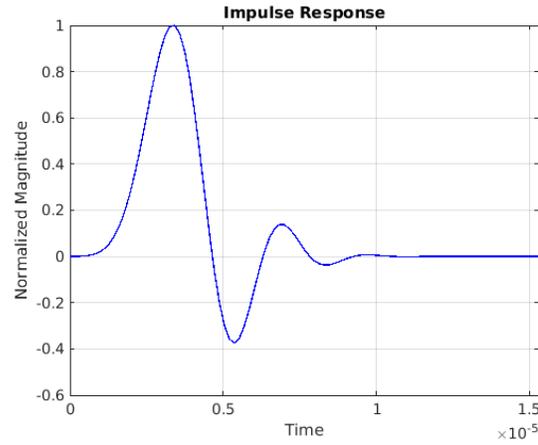
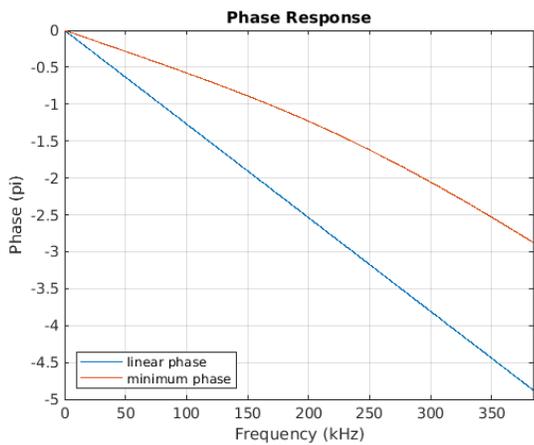
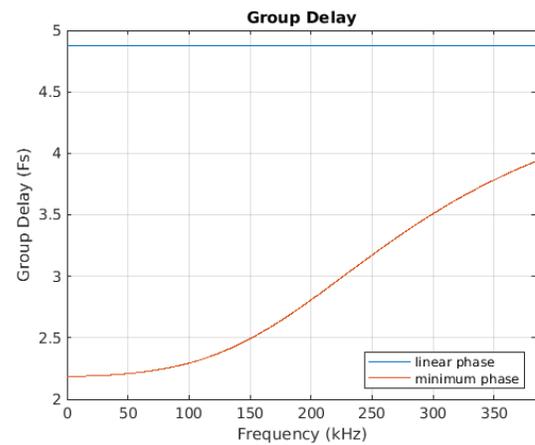
**ADC Filter Response—Slow Roll-Off, 96 kHz Sample Rate**

**Figure 8-25. Passband Magnitude**

**Figure 8-26. Stopband Magnitude**

**Figure 8-27. Impulse Response—Linear Phase**

**Figure 8-28. Impulse Response—Minimum Phase**

**Figure 8-29. Phase vs. Frequency**

**Figure 8-30. Group Delay vs. Frequency**

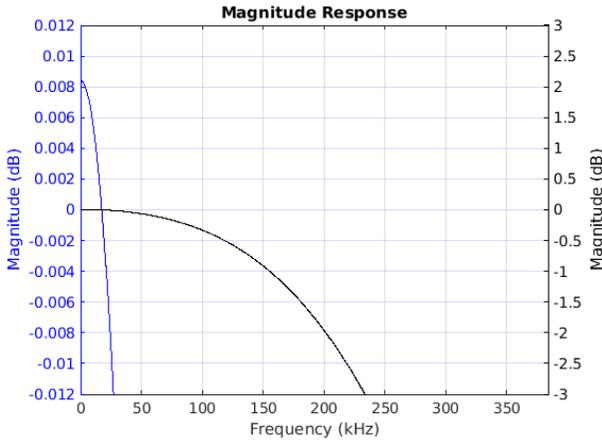
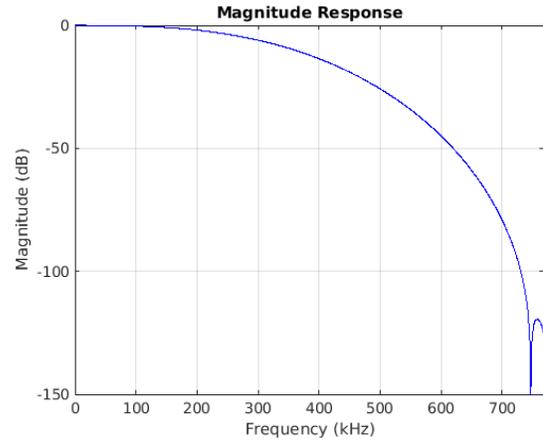
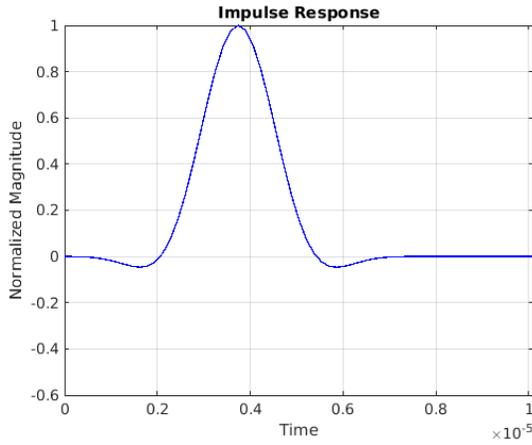
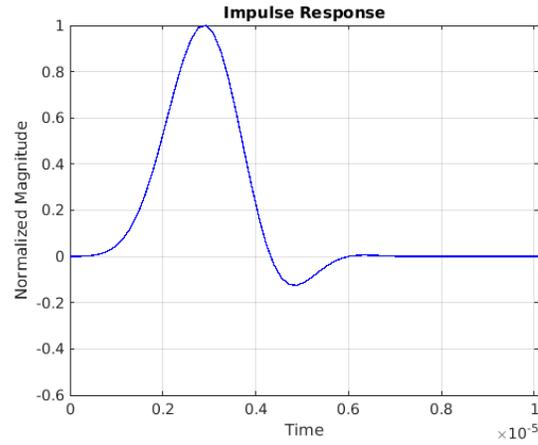
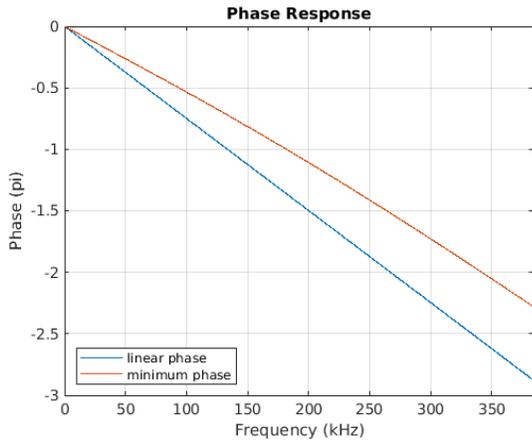
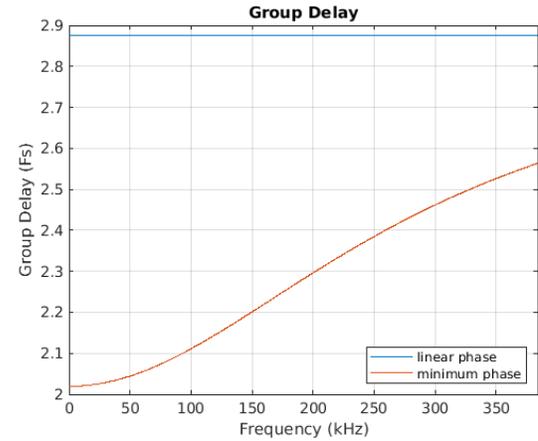
**ADC Filter Response—Fast Roll-Off, 192 kHz Sample Rate**

**Figure 8-31. Passband Magnitude**

**Figure 8-32. Stopband Magnitude**

**Figure 8-33. Impulse Response—Linear Phase**

**Figure 8-34. Impulse Response—Minimum Phase**

**Figure 8-35. Phase vs. Frequency**

**Figure 8-36. Group Delay vs. Frequency**

**ADC Filter Response—Slow Roll-Off, 192 kHz Sample Rate**

**Figure 8-37. Passband Magnitude**

**Figure 8-38. Stopband Magnitude**

**Figure 8-39. Impulse Response—Linear Phase**

**Figure 8-40. Impulse Response—Minimum Phase**

**Figure 8-41. Phase vs. Frequency**

**Figure 8-42. Group Delay vs. Frequency**

**ADC Filter Response—Fast Roll-Off, 384 kHz Sample Rate**

**Figure 8-43. Passband Magnitude**

**Figure 8-44. Stopband Magnitude**

**Figure 8-45. Impulse Response—Linear Phase**

**Figure 8-46. Impulse Response—Minimum Phase**

**Figure 8-47. Phase vs. Frequency**

**Figure 8-48. Group Delay vs. Frequency**

**ADC Filter Response—Slow Roll-Off, 384 kHz Sample Rate**

**Figure 8-49. Passband Magnitude**

**Figure 8-50. Stopband Magnitude**

**Figure 8-51. Impulse Response—Linear Phase**

**Figure 8-52. Impulse Response—Minimum Phase**

**Figure 8-53. Phase vs. Frequency**

**Figure 8-54. Group Delay vs. Frequency**

**ADC Filter Response—Fast Roll-Off, 768 kHz Sample Rate**

**Figure 8-55. Passband Magnitude**

**Figure 8-56. Stopband Magnitude**

**Figure 8-57. Impulse Response—Linear Phase**

**Figure 8-58. Impulse Response—Minimum Phase**

**Figure 8-59. Phase vs. Frequency**

**Figure 8-60. Group Delay vs. Frequency**

**ADC Filter Response—Slow Roll-Off, 768 kHz Sample Rate**

**Figure 8-61. Passband Magnitude**

**Figure 8-62. Stopband Magnitude**

**Figure 8-63. Impulse Response—Linear Phase**

**Figure 8-64. Impulse Response—Minimum Phase**

**Figure 8-65. Phase vs. Frequency**

**Figure 8-66. Group Delay vs. Frequency**

## 9 Thermal Characteristics


**Table 9-1. Typical JEDEC Four-Layer, 2s2p Board Thermal Characteristics**

Parameter	Symbol	QFN	Units
Junction-to-ambient thermal resistance	$\theta_{JA}$	20.03	$^{\circ}\text{C}/\text{W}$
Junction-to-board thermal resistance	$\theta_{JB}$	7.75	$^{\circ}\text{C}/\text{W}$
Junction-to-case (top) thermal resistance	$\theta_{JC}$	45.5	$^{\circ}\text{C}/\text{W}$
Junction-to-board thermal-characterization parameter	$\Psi_{JB}$	7.38	$^{\circ}\text{C}/\text{W}$
Junction-to-package-top thermal-characterization parameter	$\Psi_{JT}$	1.83	$^{\circ}\text{C}/\text{W}$

**Notes:**

- Natural convection at the maximum recommended operating temperature  $T_A$  (see Table 3-2)
- Four-layer, 2s2p PCB as specified by JESD51-9 and JESD51-11; dimensions: 101.5 x 114.5 x 1.6 mm
- Thermal parameters as defined by JESD51-12
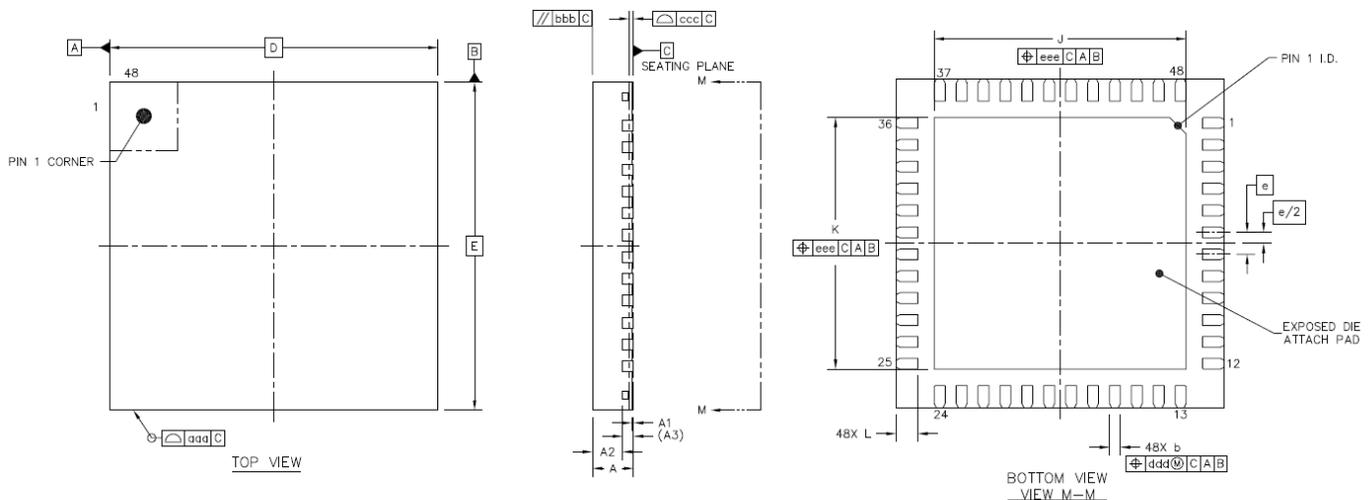
## 10 Package Dimensions




	SYMBOL	MIN	NOM	MAX	
TOTAL THICKNESS	A	0.7	0.75	0.8	
STAND OFF	A1	0	0.035	0.05	
MOLD THICKNESS	A2	---	0.55	---	
L/F THICKNESS	A3		0.203 REF		
LEAD WIDTH	b	0.15	0.2	0.25	
BODY SIZE	X		6 BSC		
	Y		6 BSC		
LEAD PITCH	e		0.4 BSC		
EP SIZE	X	J	4.5	4.6	4.7
	Y	K	4.5	4.6	4.7
LEAD LENGTH	L	0.35	0.4	0.45	
PACKAGE EDGE TOLERANCE	aaa		0.1		
MOLD FLATNESS	bbb		0.1		
COPLANARITY	ccc		0.08		
LEAD OFFSET	ddd		0.1		
EXPOSED PAD OFFSET	eee		0.1		

**NOTES**

- 1.0 COPLANARITY APPLIES TO LEADS, CORNER LEADS AND DIE ATTACH PAD.
- 2.0 TOTAL THICKNESS NOT INCLUDE SAW BURR.

**Figure 10-1. QFN Package Drawing**
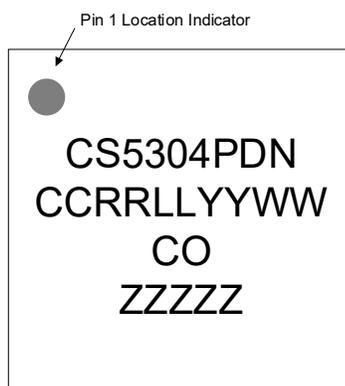
## 11 Package Marking


**Top Side Brand**

Line 1: Part number  
 Line 2: Package mark  
 Line 3: Country of origin (CO)  
 Line 4: Encoded wafer/device ID

**Package Mark Fields**

CC = Cirrus Logic Index Code  
 RR = Device revision code  
 LL = Lot sequence code  
 YY = Year of manufacture  
 WW = Work week of manufacture

**Figure 11-1. Package Marking**

## 12 Ordering Information

**Table 12-1. Ordering Information**

Product	Description	Package	RoHS Compliant	Grade	Temperature Range	Container	Orderable Part Number
CS5304P	High Performance Multichannel Audio ADC	48-pin QFN	Yes	Commercial	-40 to +85°C	Tray	CS5304P-DN
						Tape and Reel	CS5304P-DNR

## 13 References

- NXP Semiconductors, UM10204 Rev. 7, October 2021, *I2C-Bus Specification and User Manual*, <http://www.nxp.com>

## 14 Revision History

**Table 14-1. Revision History**

Revision	Changes
F1 JUN 2025	<ul style="list-style-type: none"> <li>Initial production release</li> </ul>

**Important:** Please check [www.cirrus.com](http://www.cirrus.com) or with your Cirrus Logic sales representative to confirm that you are using the latest revision of this document and to determine whether there are errata associated with this device.

---

## Contacting Cirrus Logic Support

For all product questions and inquiries, contact a Cirrus Logic Sales Representative.

To find one nearest you, go to [www.cirrus.com](http://www.cirrus.com).

---

### IMPORTANT NOTICE

The products and services of Cirrus Logic International (UK) Limited; Cirrus Logic, Inc.; and other companies in the Cirrus Logic group (collectively either “Cirrus Logic” or “Cirrus”) are sold subject to Cirrus Logic’s terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. Software is provided pursuant to applicable license terms. Cirrus Logic reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Cirrus Logic to verify that the information is current and complete. Testing and other quality control techniques are utilized to the extent Cirrus Logic deems necessary. Specific testing of all parameters of each device is not necessarily performed. In order to minimize risks associated with customer applications, the customer must use adequate design and operating safeguards to minimize inherent or procedural hazards. Cirrus Logic is not liable for applications assistance or customer product design. The customer is solely responsible for its overall product design, end-use applications, and system security, including the specific manner in which it uses Cirrus Logic components. Certain uses or product designs may require an intellectual property license from a third party. Features and operations described herein are for illustrative purposes only and do not constitute a suggestion or instruction to adopt a particular product design or a particular mode of operation for a Cirrus Logic component.

CIRRUS LOGIC PRODUCTS ARE NOT DESIGNED, TESTED, INTENDED OR WARRANTED FOR USE (1) WITH OR IN IMPLANTABLE PRODUCTS OR FDA/ MHRA CLASS III (OR EQUIVALENT CLASSIFICATION) MEDICAL DEVICES, OR (2) IN ANY PRODUCTS, APPLICATIONS OR SYSTEMS, INCLUDING WITHOUT LIMITATION LIFE-CRITICAL MEDICAL EQUIPMENT OR SAFETY OR SECURITY EQUIPMENT, WHERE MALFUNCTION OF THE PRODUCT COULD CAUSE PERSONAL INJURY, DEATH, SEVERE PROPERTY DAMAGE OR SEVERE ENVIRONMENTAL HARM. INCLUSION OF CIRRUS LOGIC PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER’S RISK AND CIRRUS LOGIC DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUS LOGIC PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER’S CUSTOMER USES OR PERMITS THE USE OF CIRRUS LOGIC PRODUCTS IN SUCH A MANNER, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUS LOGIC, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS’ FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

This document is the property of Cirrus Logic, and you may not use this document in connection with any legal analysis concerning Cirrus Logic products described herein. No license to any technology or intellectual property right of Cirrus Logic or any third party is granted herein, including but not limited to any patent right, copyright, mask work right, or other intellectual property rights. Any provision or publication of any third party’s products or services does not constitute Cirrus Logic’s approval, license, warranty or endorsement thereof. Cirrus Logic gives consent for copies to be made of the information contained herein only for use within your organization with respect to Cirrus Logic integrated circuits or other products of Cirrus Logic, and only if the reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices and conditions (including this notice). This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale. This document and its information is provided “AS IS” without warranty of any kind (express or implied). All statutory warranties and conditions are excluded to the fullest extent possible. No responsibility is assumed by Cirrus Logic for the use of information herein, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. Cirrus Logic, Cirrus, the Cirrus Logic logo design, and SoundClear are among the trademarks of Cirrus Logic. Other brand and product names may be trademarks or service marks of their respective owners.

Copyright © 2022–2025 Cirrus Logic, Inc. and Cirrus Logic International Semiconductor Ltd. All rights reserved.

SPI is a trademark of Motorola.