



11/15/01

Errata: CS4391 Data Sheet revision DS335PP3 dated Apr '00


-The CS4391 is also offered in a 300 MIL SOIC package. It can be ordered with the CS4391-KS designation. The KS package specifications have been included in this errata.

-On page 19 in section 4.5.2 and on page 32 in section 7.2 #3, '30h to register 5' should replace '11h to register 5'. Writing 30h to register 5 enables the PDN and CPEN bits.

Contacting Cirrus Logic Support:

For a complete listing of Direct Sales, Distributor, and Sales Representative contacts, visit the Cirrus Logic web site at: <http://www.cirrus.com/corporate/contacts/sales.cfm>
or email: proaudio@crystal.com

20L SOIC (300 MIL BODY) PACKAGE DRAWING

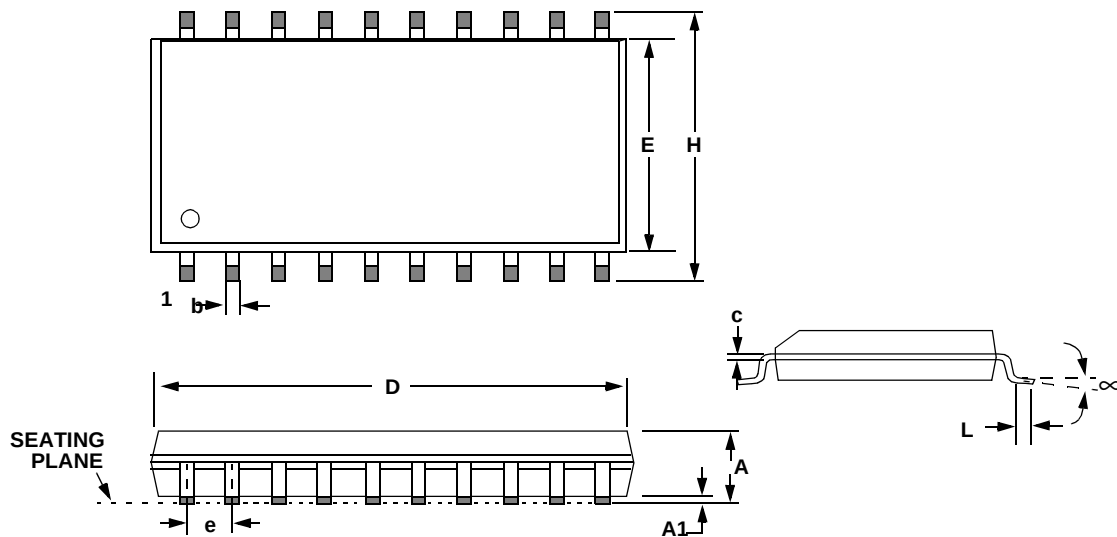

DIM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.093	0.098	0.104	2.35	2.50	2.65
A1	0.004	0.008	0.012	0.10	0.20	0.30
b	0.013	0.017	0.020	0.33	0.43	0.51
C	0.009	0.011	0.013	0.23	0.28	0.32
D	0.496	0.504	0.512	12.60	12.80	13.00
E	0.291	0.295	0.299	7.40	7.50	7.60
e	0.040	0.050	0.060	1.02	1.27	1.52
H	0.394	0.407	0.419	10.00	10.34	10.65
L	0.016	0.025	0.050	0.40	0.64	1.27
∞	0°	4°	8°	0°	4°	8°

JEDEC #: MS-013

Controlling Dimension is Millimeters