

Four-Channel AFE with Sensor Timing Generation and LVDS/CMOS Data Output

Features


- Four-channel analog front end (AFE)
- Correlated double sampling
- RGB LED current drive and timing control
- Multiplexed data output format
- Internally generated reference voltages
- 3.3 V power regulation for CIS sensor
- Timing control for sensor
- Versatile clocking configuration
 - Tolerant of spread-spectrum clock reference
 - Programmable DLL and PLL
 - Spread-spectrum modulation of data output
- SPI or I²C control interface
- 40-pin QFN package

Specifications

- 16-bit data output
- 24 MSPS conversion rate per channel
- 12-bit programmable gain
- 9-bit programmable offset adjust
- 5-bit programmable clamp voltage
- 8-bit LED drive resolution

Applications

- Flatbed and sheet-feed scanners
- USB-compatible scanners
- Multifunction peripherals

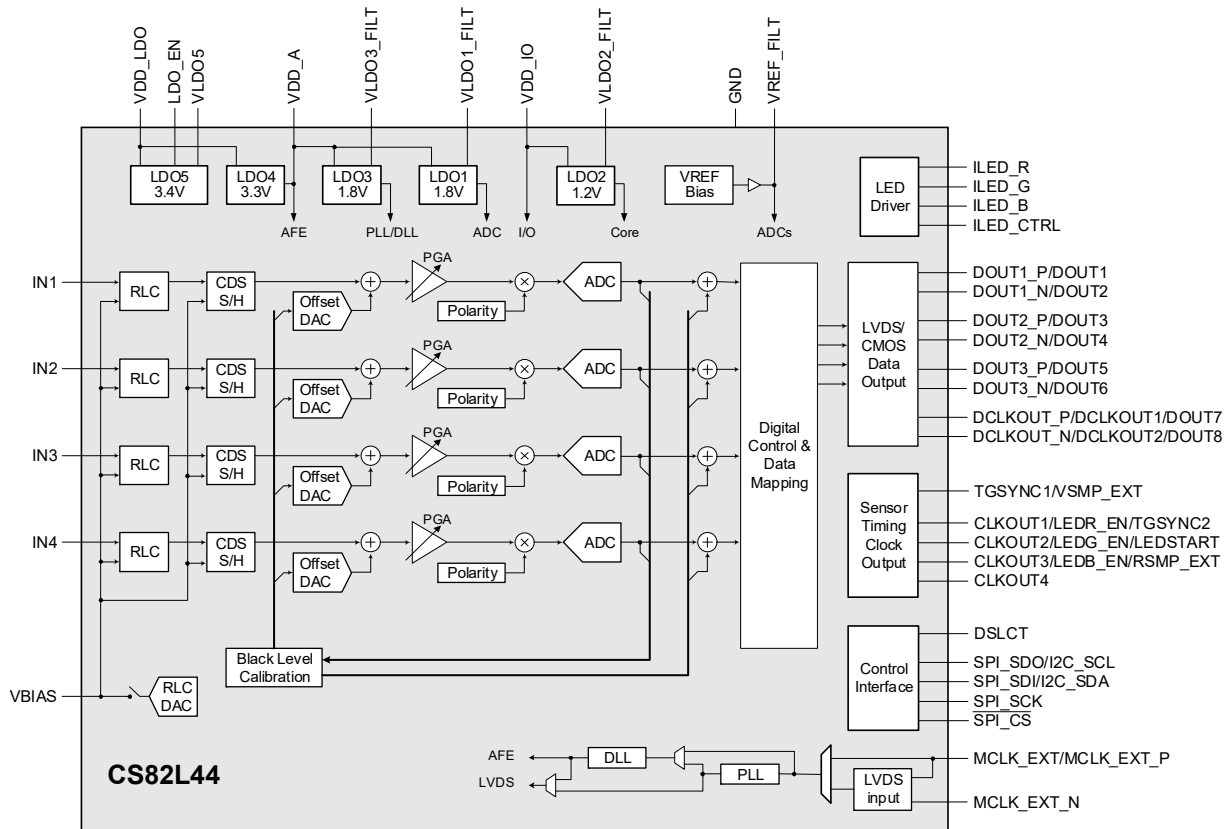

General Description

The CS82L44 is a front-end device for CCD and CIS sensors. The CS82L44 processes and digitizes the analog sensor signals at pixel conversion rates of up to 24 MSPS per channel.

The signal processing for each channel includes reset level clamping (RLC), correlated double sampling (CDS), and programmable polarity, gain and offset adjustment. Voltage references may be generated by an internal DAC or else provided externally.

The output data is available in a variety of digital formats via CMOS or LVDS data interfaces.

The CS82L44 incorporates an RGB LED driver with programmable current sinks and timing control. White LEDs are also supported.

The 3.3 V supply may be provided directly, or else generated using an on-chip LDO. An additional LDO provides a 3.4 V supply for an external sensor.

The CS82L44 is available in a commercial-grade 0.4 mm pitch, 40-pin QFN package for operation from $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$.

See [Section 12](#) for ordering information.

Table of Contents

1 Pin Assignments and Descriptions	5
1.1 QFN 40-Pin (Top View, Through-Package)	5
1.2 QFN Pin Descriptions	6
1.3 Termination of Unused Pins	7
1.4 Electrostatic Discharge (ESD) Protection Circuitry	7
2 Typical Connection Diagram	8
3 Characteristics and Specifications	11
Table 3-1. Recommended Operating Conditions	11
Table 3-2. Absolute Maximum Ratings	11
Table 3-3. Analog Input Path	12
Table 3-4. LED Driver	13
Table 3-5. LDO5 Regulator	13
Table 3-6. Digital Interface Specifications and Characteristics	14
Table 3-7. DC Characteristics	14
Table 3-8. System Clocking, Startup and Shutdown	15
Table 3-9. Temperature Monitoring and Protection Characteristics	15
Table 3-10. Device Power Consumption	16
Table 3-11. Switching Specifications—Video Sample Timing (TG Mode)	17
Table 3-12. Switching Specifications—TGSYNC/LEDSTART Timing (TG Slave Mode)	18
Table 3-13. Switching Specifications—Video Sample Timing (External Mode 1)	19
Table 3-14. Switching Specifications—Video Sample Timing (External Mode 2)	20
Table 3-15. Switching Specifications—MCLK Mask Timing (External Mode)	21
Table 3-16. Switching Specifications—TGSYNC/LEDSTART Timing (External Mode)	21
Table 3-17. Switching Specifications—Data Output	22
Table 3-18. Switching Specifications—Clock Output	23
Table 3-19. Switching Specifications—Monitor Output	23
Table 3-20. Switching Specifications—I ² C Control Port	24
Table 3-21. Switching Specifications—SPI Port	25
4 Functional Description	26
4.1 Power Supplies and Reset	26
4.2 Operational States	29
4.3 MCLK Input, PLL and DLL	31
4.4 Analog Input Path	35
4.5 Digital Output Format	47
4.6 Sample Timing Control	54
4.7 TG Sync and Pixel Counter Control	60
4.8 Clock Timing Generation	65
4.9 LED Driver Control	74
4.10 Control Interface	75
4.11 Pin Configuration and General-Purpose Input/Output	81
4.12 Debug Monitor Output	83
4.13 Device ID	83
5 Applications	84
5.1 Digital Output Definitions	84
5.2 Output Code Calculation	92
6 Register Quick Reference—Banked Register Mode (SPI)	94
6.1 BANK0	94
6.2 BANK1	97
6.3 BANK2	99
6.4 BANK3	103
6.5 BANK6	107
6.6 BANK7	110
7 Register Quick Reference—Flat Register Mode (I²C or SPI)	112
7.1 SW_RESET	112
7.2 CTRL_ASYNC	113
7.3 CCM	113
7.4 MSM	113
7.5 TIM_GEN	114
7.6 OP_FORMAT	121
7.7 PA \bar{D} _INTF	122
7.8 DAC_CTRL	123
7.9 PGA_CTRL	125
7.10 BLC_CTRL	126
7.11 SARADC_1	127
7.12 SARADC_2	127
7.13 SARADC_3	127
7.14 SARADC_4	127
7.15 AGC_TOP	128
7.16 PAT_GEN	129
7.17 LED_CTRL	129

7.18 DPLL1	129
8 Register Descriptions—Flat Register Mode (I²C or SPI)	131
8.1 SW_RESET	131
8.2 CTRL_ASYNC	132
8.3 CCM	133
8.4 MSM	136
8.5 TIM_GEN	139
8.6 OP_FORMAT	184
8.7 PAD_INTF	187
8.8 DAC_CTRL	199
8.9 PGA_CTRL	207
8.10 BLC_CTRL	211
8.11 SARADC_1	217
8.12 SARADC_2	217
8.13 SARADC_3	218
8.14 SARADC_4	218
8.15 AGC_TOP	219
8.16 PAT_GEN	227
8.17 LED_CTRL	228
8.18 DPLL1	230
9 Thermal Characteristics	233
10 Package Dimensions	233
11 Package Marking	234
12 Ordering Information	234
13 Revision History	234

1 Pin Assignments and Descriptions

1.1 QFN 40-Pin (Top View, Through-Package)

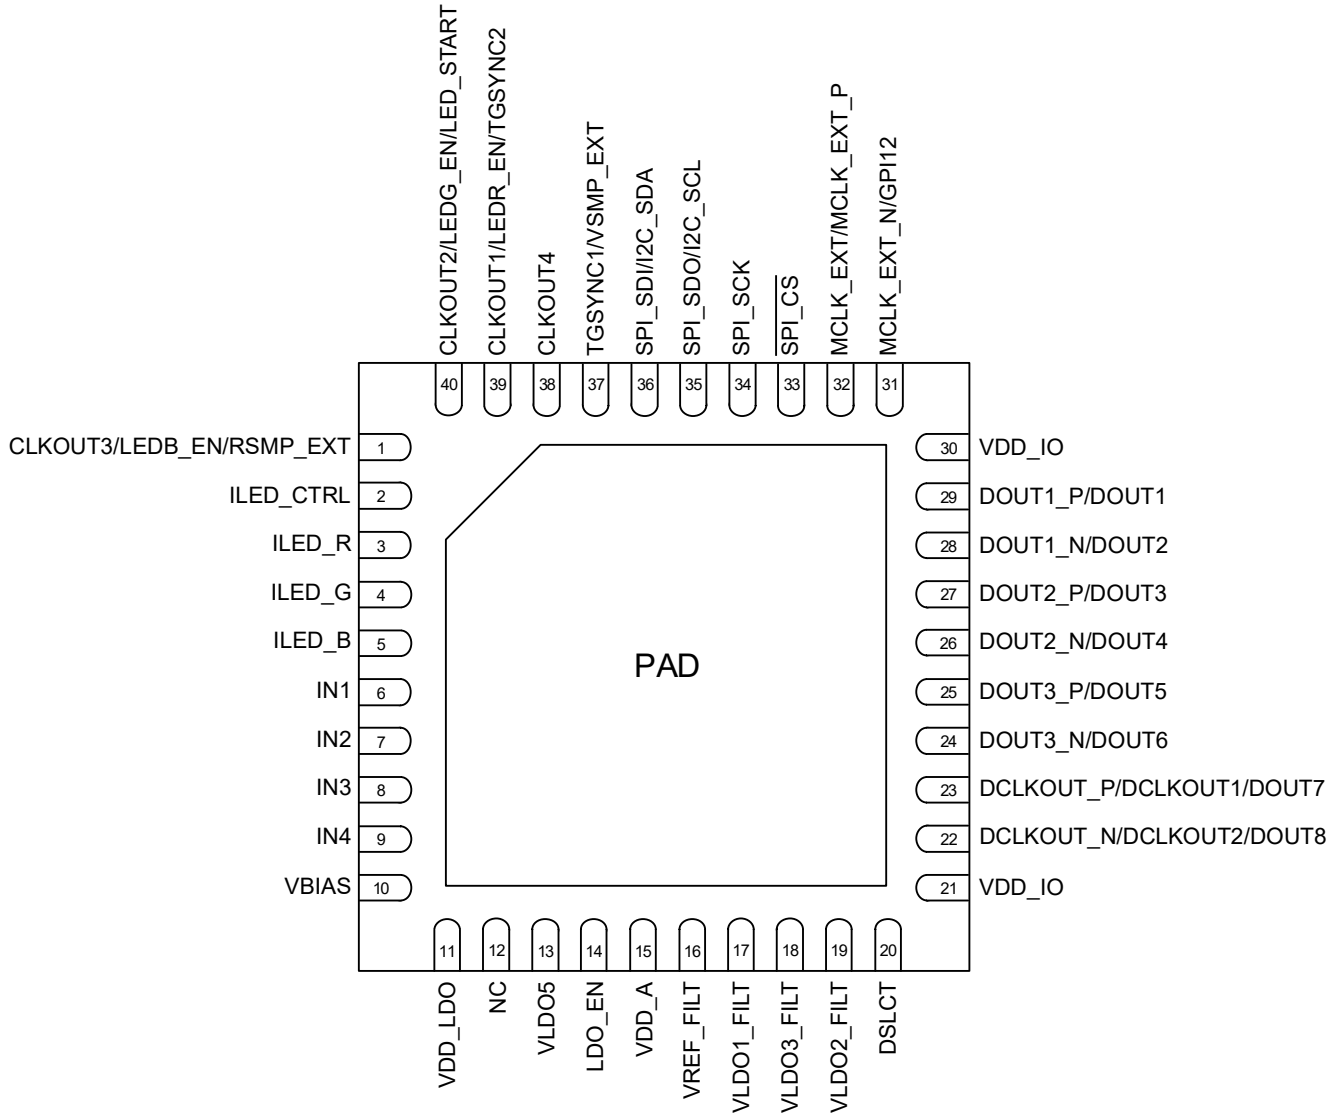


Figure 1-1. QFN 40-pin diagram (Top View, Through Package)

1.2 QFN Pin Descriptions

Table 1-1. QFN Pin Descriptions

Pin Name	Pin #	Power Supply	I/O	Description	State at Reset
Digital I/O					
CLKOUT1/LEDR_EN/ TGSYNC2	39	VDD_IO	I/O	Programmable clock output/ Red LED enable/ Timing generator control input/ General-Purpose Input/Output 1	TGSYNC2 input, pull-down
CLKOUT2/LEDG_EN/ LED_START	40	VDD_IO	I/O	Programmable clock output/ Green LED enable/ LED timing control input/ General-Purpose Input/Output 2	LED_START input, pull-down
CLKOUT3/LEDB_EN/ RSMP_EXT	1	VDD_IO	I/O	Programmable clock output/ Blue LED enable/ Reset sample control input/ General-Purpose Input/Output 3/ Clock monitor	RSMP_EXT input, pull-down
CLKOUT4	38	VDD_IO	I/O	Programmable clock output/ General-Purpose Input/Output 4	GPI4 input, pull-down
DCLKOUT_P/DCLKOUT1/ DOUT7	23	VDD_IO	O	LVDS +clock output CMOS clock output 1/ CMOS data output 7	Disabled o/p, pull-down
DCLKOUT_N/DCLKOUT2/ DOUT8	22	VDD_IO	O	LVDS –clock output/ CMOS clock output 2/ CMOS data output 8	Disabled o/p, pull-down
DOUT1_P/DOUT1	29	VDD_IO	O	LVDS +data output 1/CMOS data output 1	Disabled o/p, pull-down
DOUT1_N/DOUT2	28	VDD_IO	O	LVDS –data output 1/CMOS data output 2	Disabled o/p, pull-down
DOUT2_P/DOUT3	27	VDD_IO	O	LVDS +data output 2/CMOS data output 3	Disabled o/p, pull-down
DOUT2_N/DOUT4	26	VDD_IO	O	LVDS –data output 2/CMOS data output 4	Disabled o/p, pull-down
DOUT3_P/DOUT5	25	VDD_IO	O	LVDS +data output 3/CMOS data output 5	Disabled o/p, pull-down
DOUT3_N/DOUT6	24	VDD_IO	O	LVDS –data output 3/CMOS data output 6	Disabled o/p, pull-down
MCLK_EXT/MCLK_EXT_P	32	VDD_IO	I	Reference clock input/LVDS +clock input	MCLK_EXT input, pull-down
MCLK_EXT_N	31	VDD_IO	I	LVDS –clock input/General-Purpose Input 12	GPI12 input, pull-down
SPI_SDO/I2C_SCL	35	VDD_IO	I/O	SPI data output/I2C clock input	Input, pull-down
SPI_SDI/I2C_SDA	36	VDD_IO	I/O	SPI data input/I2C data input/output	Input, pull-down
SPI_SCK	34	VDD_IO	I	SPI clock input	Input, pull-down
SPI_CS	33	VDD_IO	I	SPI peripheral select input	Input, pull-down
TGSYNC1/VSMP_EXT	37	VDD_IO	I/O	Timing generator control input-output/ Video sample control input	VSMP_EXT input, pull-down
Analog I/O					
DSLCT	20	VDD_IO	I	Control interface address select	—
ILED_B	5	—	I	Blue LED current sink	—
ILED_G	4	—	I	Green LED current sink	—
ILED_R	3	—	I	Red LED current sink	—
ILED_CTRL	2	VDD_A	O	External resistor for LED current control	—
IN1	6	VDD_A	I	Analog input for ADC channel 1	—
IN2	7	VDD_A	I	Analog input for ADC channel 2	—

Table 1-1. QFN Pin Descriptions (Cont.)

Pin Name	Pin #	Power Supply	I/O	Description	State at Reset
IN3	8	VDD_A	I	Analog input for ADC channel 3	—
IN4	9	VDD_A	I	Analog input for ADC channel 4	—
LDO_EN	14	—	I	LDO regulator enable (LDO4, LDO5)	—
VBIAS	10	VDD_A	I/O	Reference voltage for AFE inputs	—
VLDO1_FILT	17	VDD_A	O	LDO1 output	—
VLDO2_FILT	19	VDD_IO	O	LDO2 output	—
VLDO3_FILT	18	VDD_A	O	LDO3 output	—
VLDO5	13	VDD_LDO	O	LDO5 output	—
VREF_FILT	16	VDD_A	O	Voltage reference for internal circuits	—
Power Supplies					
GND	PAD	—	—	Ground	—
VDD_A	15	—	—	Supply for LDO1, LDO3, and analog circuits	—
VDD_IO	21, 30	—	—	Supply for LDO2 and digital I/O	—
VDD_LDO	11	—	—	Supply for LDO4 and LDO5	—
No Connect					
NC	12	—	—	No connection	—

- See [Table 3-1](#) for recommended operating limits for all pins

1.3 Termination of Unused Pins

[Table 1-2](#) shows the required termination for unused pins (i.e., if the functionality of the pin is not being used). Pins not listed must be connected as shown in the typical connection drawings (see [Section 2](#)).

Table 1-2. Termination of Unused Pins


Name	Termination if unused
CLKOUT1/LEDR_EN/TGSYNC2 CLKOUT2/LEDG_EN/LED_START CLKOUT3/LEDB_EN/RSMP_EXT CLKOUT4 DCLKOUT_x/DCLKOUTx/DOUTx DOUTx_P/DOUTx DOUTx_N/DOUTx	Float
ILED_x ILED_CTRL INx MCLK_EXT_N SPI_SCK TGSYNC1/VSMP_EXT	Connect to GND
SPI_CS	Connect to VDD_IO

1.4 Electrostatic Discharge (ESD) Protection Circuitry



ESD-sensitive device. The CS82L44 is manufactured on a CMOS process. Therefore, it is generically susceptible to damage from excessive static voltages. Proper ESD precautions must be taken while handling and storing this device. This device is qualified to current JEDEC ESD protection standards.


2 Typical Connection Diagram

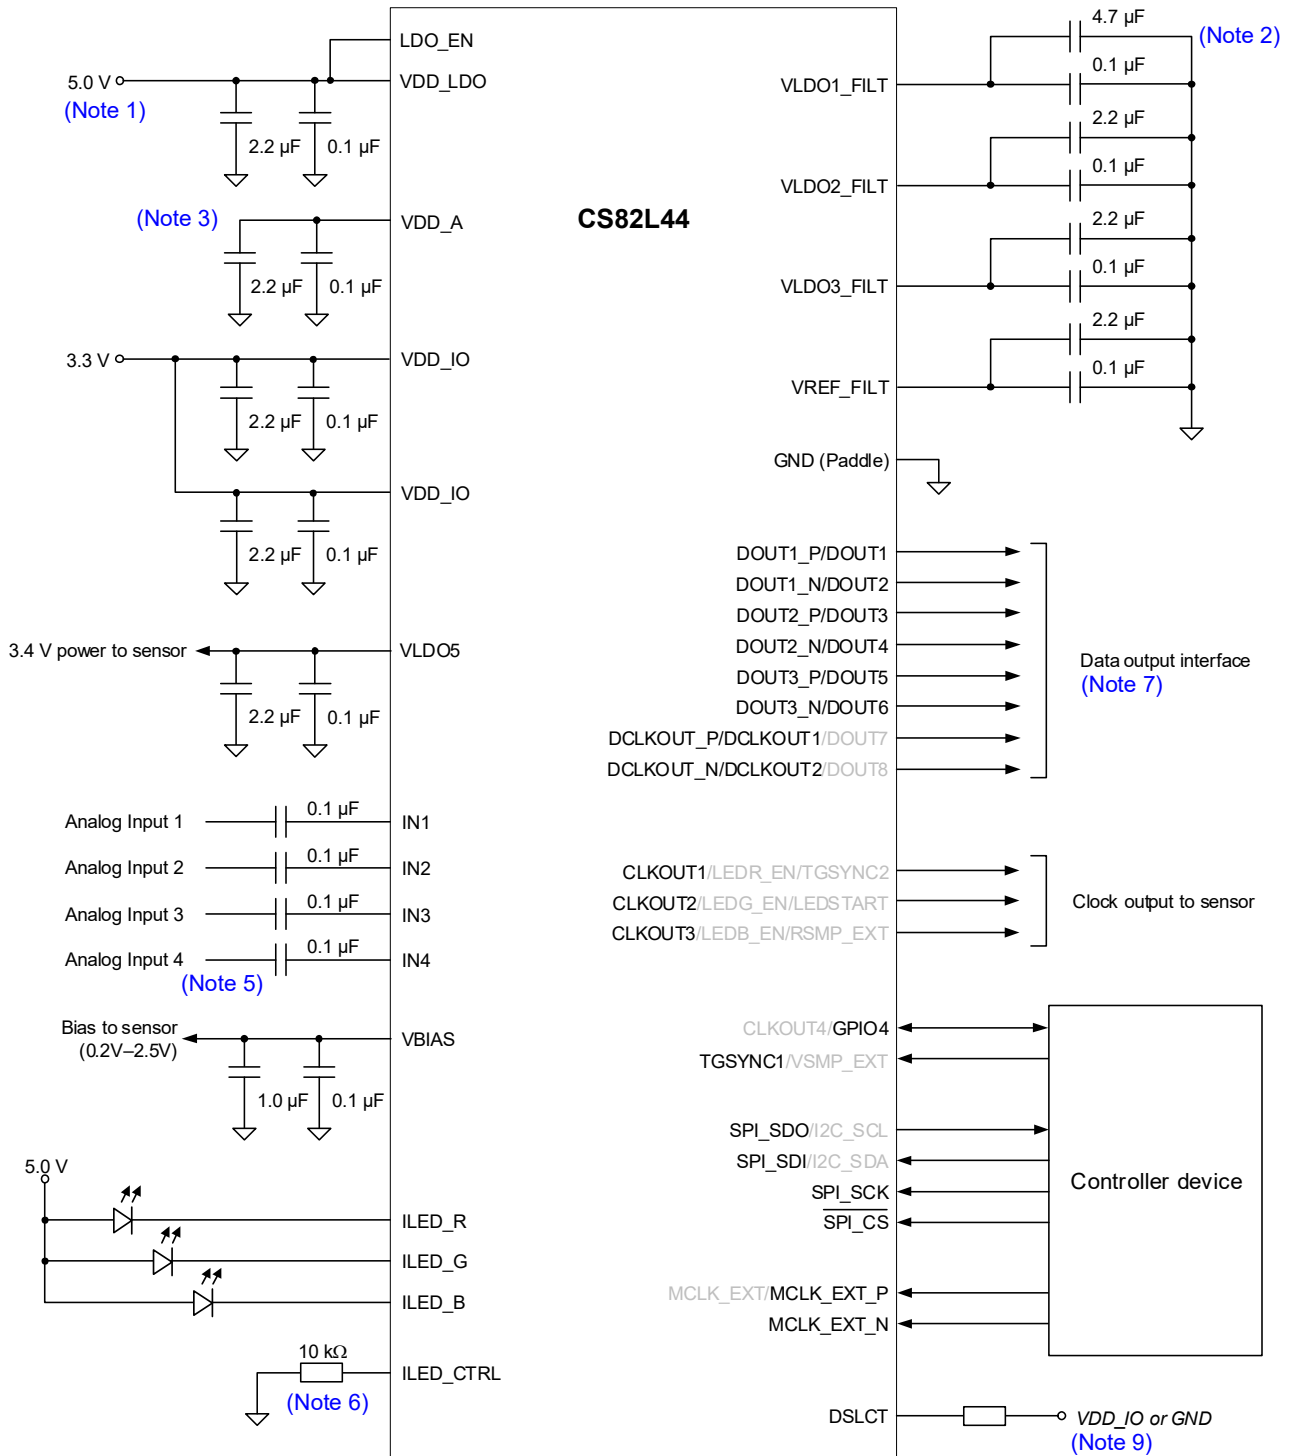

Note: Unselected signals as part of multifunction pins are shown in gray.

Note - In I2C control mode, a pull-up resistor (to VDD_IO) is required on I2C_SCL and I2C_SDA.

Figure 2-1. Typical Connections—TG Mode, Using LDO4/LDO5 Regulators

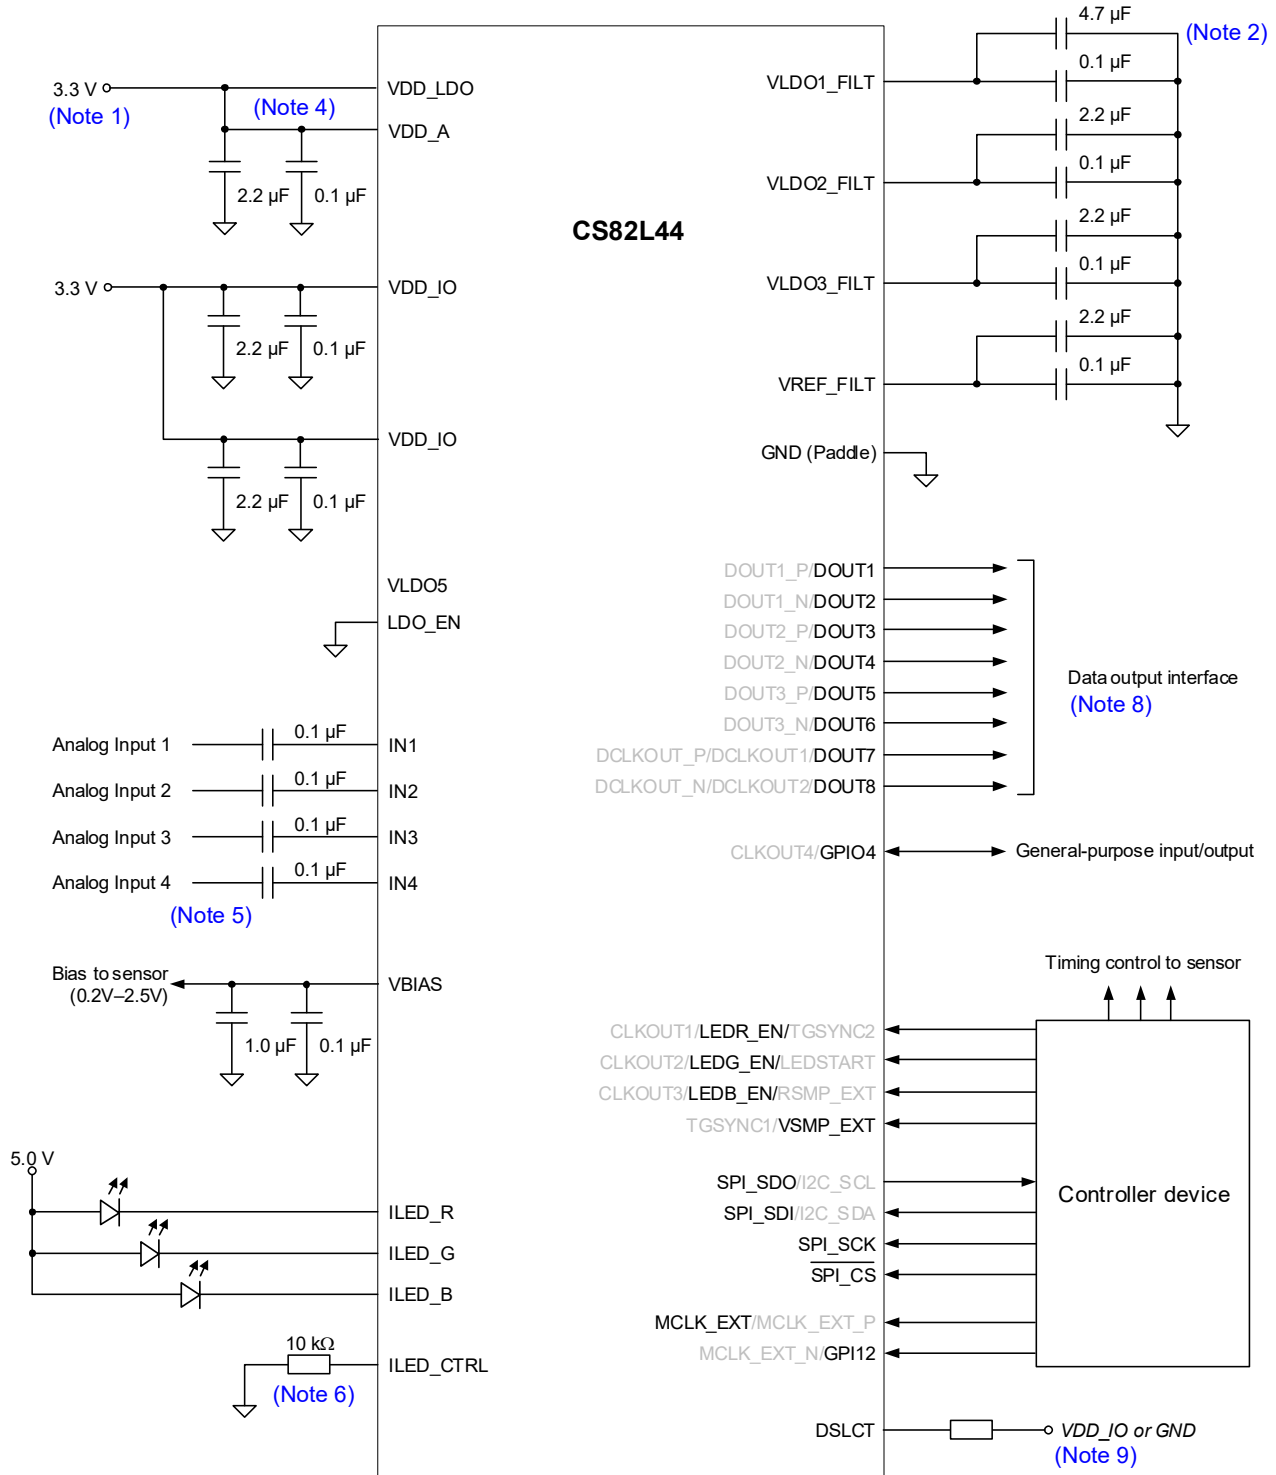

Note: Unselected signals as part of multifunction pins are shown in gray.

Note - In I2C control mode, a pull-up resistor (to VDD_IO) is required on I2C_SCL and I2C_SDA.

Figure 2-2. Typical Connections—External Mode, LDO4/LDO5 Regulators Not Used

Notes referenced in the typical connection diagrams:

1. Power supply decoupling should be placed as close as possible to the CS82L44.
2. All capacitors are X7R, 20 % tolerance.
3. In the configuration shown, VDD_A is derived from the VDD_LDO supply, using the internal regulator.
4. In the configuration shown, the LDO4 and LDO5 internal regulators are not used. The VDD_LDO connection must be tied to VDD_A in this case.
5. Input capacitors are not required for DC-coupled analog input.
6. The LED current-control resistor must be within 1 % of the specified value.
7. In TG Mode, data output is supported in LVDS or CMOS (TG) formats.
8. In External Mode, data output is supported in CMOS (External) format only.
9. The control interface is typically configured by connecting DSLCT directly to VDD_IO or GND. If two CS82L44 devices are connected on a shared SPI bus, a pull-up resistor to VDD_IO is used to configure the devices. The capacitive loading on the DSLCT pin must not exceed 100 pF. See [Section 4.10](#) for further details.

3 Characteristics and Specifications

Note: The default register field configurations are used unless specified otherwise in the test conditions.

Table 3-1. Recommended Operating Conditions

Test conditions: Ground = 0 V; voltages are with respect to ground.

Parameter		Symbol	Minimum	Typical	Maximum	Unit	
DC power supply	Digital input/output supply	VDD_IO	3.04	3.3	3.63	V	
	Analog supply ^{1,2}	VDD_A	3.04	3.3	3.63	V	
	LDO regulators supply ³	VDD_LDO	VDD_A	3.3	5.5	V	
LDO4 and LDO5 disabled	4.7						5.0
LDO4 or LDO5 enabled							
Supply ramp up/down (all supplies)		t _{PWR-UD}	0.001	—	0.1	V/μs	
LED operating voltage		I _{LED_R} , I _{LED_G} , I _{LED_B}	V _{ILED}	0.25	—	5.5	V
Ambient temperature		Functional Parametric performance	T _A	-40	25	85	°C
				0	25	85	°C

Note: Functionality or parametric performance is not guaranteed or implied outside the limits in this table. Operation outside these limits may adversely affect device reliability.

- The analog supply can be generated by internal LDO4 (powered from VDD_LDO), or else provided externally.
- The VDD_A supply is not required in the Idle and Sleep states (see [Section 4.2](#)); VDD_A can be disabled in these states to reduce power consumption. Note the sensor must also be powered down if VDD_A is disabled, to ensure the INx analog input voltage does not exceed VDD_A.
- The VDD_LDO voltage must always be greater than or equal to VDD_A. If the LDO regulators are not used, VDD_LDO should be tied to VDD_A.

Table 3-2. Absolute Maximum Ratings

Test conditions: Ground = 0 V; voltages are with respect to ground.

Parameter	Symbol	Minimum	Maximum	Unit
Analog and digital supplies	VDD_A, VDD_IO	-0.3	4.36	V
LDO regulators supply	VDD_LDO	VDD_A-0.3 [1]	6.6	V
External voltage at digital inputs/outputs	V _{INDI}	-0.3	VDD_IO + 0.3	V
External voltage at analog inputs	I _{Nn} , VBIAS LDO_EN I _{LED_R} , I _{LED_G} , I _{LED_B}	-0.3	VDD_A + 0.3	V
		-0.3	5.5	V
		-0.3	6.6	V
Input current	I _{in}	—	±10	mA
Ambient operating temperature	T _A	-40	+85	°C
Junction operating temperature	T _J	-40	+125	°C
Storage temperature	T _{STG}	-65	+150	°C

Caution: Stresses beyond “Absolute Maximum Ratings” levels may cause permanent damage to the device. These levels are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in [Table 3-1](#) is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

- If VDD_A < 0 V, the minimum LDO_VDD rating is -0.3 V.

Table 3-3. Analog Input Path

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter	Minimum	Typical	Maximum	Unit	
ADC sample rate	2	—	24	MHz	
Maximum ADC output word length	—	16	—	Bits	
Full-scale input voltage	Minimum gain	—	2.4	V _{pk-pk}	
	Maximum gain	—	0.25	V _{pk-pk}	
Input capacitance	INx to ground	—	4	pF	
Full-scale transition error	0 dB gain	—	55	mV	
Zero-scale transition error	0 dB gain	—	33	mV	
Differential nonlinearity	10 bit	-0.999	±0.5	+1.5	LSB
Integral nonlinearity	10 bit	—	±1	±4	LSB
Output noise	10 bit, 0 dB gain	—	0.5	1.5	LSB _{RMS}
Crosstalk (channel to channel)	10 bit, 0 dB gain	-0.5	—	0.5	LSB
PGA gain	minimum	—	1.0	—	V/V
	maximum	—	9.75	—	V/V
	step size (gain = 1–5 V/V)	—	0.125	—	V
	step size (gain = 5–9.75 V/V)	—	0.25	—	V
Digital gain	minimum	—	0.5	—	V/V
	maximum	—	1.99	—	V/V
	resolution	—	12	—	bits
VBIAS input voltage	0.11	—	2.95	V	
VBIAS short-circuit current	short to VDD_A	—	42	—	mA
	short to GND	—	2	—	mA
VBIAS clamp-on resistance	—	50	—	Ω	
VBIAS output resistance	VBIAS_ISEL = 10	—	2	—	Ω
VBIAS leakage current	0 < VBIAS < VDD_A	—	—	1	μA
RLC output voltage	minimum	—	0.17	—	V
	maximum	—	2.65	—	V
	step size	—	0.08	—	V
RLC differential nonlinearity	—	±0.5	—	LSB	
RLC integral nonlinearity	—	±0.5	—	LSB	
Offset voltage	minimum	-400	-343	-250	mV
	maximum	250	343	400	mV
	step size	—	1.34	—	mV
Offset voltage settling time ¹	—	2	—	samples	
Offset differential nonlinearity	—	±0.5	±1	LSB	
Offset integral nonlinearity	—	±0.5	±1	LSB	
Offset temperature drift	T _A = 0°C to 85°C	-2.5	—	2.5	%

1. Measured when changing from the maximum output code to the minimum output code; settling time is defined from the end of the register write to the offset voltage being within 1.3 mV of the final level.

Table 3-4. LED Driver

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; LED control resistor (ILED_CTRL to GND) = 10 kΩ; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter	Minimum	Typical	Maximum	Unit	
Coarse current control ¹	LEDx_COARSE = 00	28	33	38	mA
	LEDx_COARSE = 01	36	41	46	mA
	LEDx_COARSE = 10	44	49	54	mA
	LEDx_COARSE = 11	59	66	73	mA
Fine current control	minimum	—	0	—	mA
	maximum	—	Note ²	—	mA
	resolution	—	8	—	bits
Fine current control DNL	—1	—	1	LSB	
Fine current control INL	—1	—	1	LSB	
Current control error	LEDx_COARSE = 00, LEDx_FINE > 0x26	—	—	18	%
	LEDx_COARSE = 01, LEDx_FINE > 0x20	—	—	15	%
	LEDx_COARSE = 10, LEDx_FINE > 0x1B	—	—	12	%
	LEDx_COARSE = 11, LEDx_FINE > 0x14	—	—	12	%
Maximum LED driver current (sum of all enabled channels)	—	135	—	mA	
LED leakage current (LED output disabled)	—	20	—	μA	
Maximum LED fault current ³	—	90	—	mA	
Load capacitance	—	—	10	pF	

1. Assumes maximum fine-current selection (LEDx_FINE = 0xFF).

2. At the maximum fine-current selection, the LED current is equal to the applicable coarse control setting.

3. Fault conditions include ILED_CTRL resistor short circuit, ILED_CTRL resistor short to GND or supply, and internal driver faults.

Table 3-5. LDO5 Regulator

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = 3.3 V, VDD_LDO = 5.0 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter	Minimum	Typical	Maximum	Unit	
Programmable output voltage	minimum	—	3.016	V	
	maximum	—	3.56	V	
	step size	—	0.068	V	
Output voltage accuracy	V _{OUT} = 3.4 V, I _{LOAD} = 200 mA	—3	—	3	%
Output load current ¹	0	—	360	mA	
Output load current limit ²	V _{OUT} = 3.4 V	300	400	500	mA
Output load regulation	V _{OUT} = 3.4 V, I _{LOAD} = 1–200 mA	—	60	—	mV
PSRR	100 mV (peak-peak) 1 kHz sine wave, I _{LOAD} = 10 mA	—	70	—	dB
Start-up time	from LDO_EN high to output within specification	—	—	5	ms
Input voltage to enable LDO5	LDO_EN pin	2	—	—	V
Input voltage to disable LDO5	LDO_EN pin	—	—	250	mV

1. To achieve maximum load current, the current limit must be increased from default. The specified range is supported for LDO5_ILIMIT_CTRL = 111, LDO5_ILIMIT_VPC = 1.

2. Assumes default register conditions, LDO5_ILIMIT_CTRL = 000, LDO5_ILIMIT_VPC = 1.

Table 3-6. Digital Interface Specifications and Characteristics

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications; LVDS output load = 100 Ω ±1%.

Parameter		Symbol	Minimum	Typical	Maximum	Unit
CMOS input/output	Input leakage current (per pin)	I _{IN}	—	—	±4	μA
	Input capacitance (per pin)	—	—	—	10	pF
	High-level output	I _{OH} = 1 mA V _{OH}	0.9×VDD_IO	—	—	V
	Low-level output	I _{OL} = -1 mA V _{OL}	—	—	0.1×VDD_IO	V
	High-level input	V _{IH}	0.7×VDD_IO	—	—	V
	Low-level input	V _{IL}	—	—	0.3×VDD_IO	V
	Internal weak pull-up/pull-down	—	1.2	1.4	1.6	MΩ
	High-impedance output current	Pin grounded I _{OZ}	—	—	1	μA
LVDS output	Differential output voltage magnitude (steady state)	LVDS_VREF_SEL = 01 LVDS_VREF_SEL = 00 V _{OD}	160 120	200 155	242 187	mV mV
	Change in differential voltage between opposite logic states	Δ V _{OD}	—	—	50	mV
	Common-mode output voltage (steady state)	LVDS_VREF_SEL = 01 LVDS_VREF_SEL = 00 V _{OC(SS)}	1.08 0.8	1.2 0.9	1.32 1.0	V V
	Common-mode output voltage (peak-to-peak)	V _{OC(PP)}	—	25	50	mV
	Short-circuit current	Short to GND P-N short	—	—	24 12	mA mA
	LVDS input	Positive-going differential input threshold	—	—	—	100
Negative-going differential input threshold		—	-100	—	—	mV
Differential input range		—	100	—	600	mV
DC common-mode range		—	0.82	—	1.375	V
Differential input impedance		—	90	100	110	Ω

Table 3-7. DC Characteristics

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter		Minimum	Typical	Maximum	Unit	
Voltage reference (VREF_FILT)	Output voltage	—	1.2	—	V	
Power-on reset	VDD_IO reset threshold	VDD_IO rising	1.97	—	2.89	V
		VDD_IO falling	1.80	—	2.67	V
	VDD_LDO reset threshold	VDD_LDO rising	1.92	—	2.89	V
		VDD_LDO falling	1.75	—	2.67	V

Table 3-8. System Clocking, Startup and Shutdown

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter		Minimum	Typical	Maximum	Unit	
Reset	Power-on reset to control port active ^{1,2}	—	—	2	ms	
	Software reset to control port active ²	—	—	2	ms	
	Power-on reset to Idle State	—	—	4	ms	
	Software reset to Idle State	—	—	4	ms	
Ready	Idle to Ready State	—	—	4	ms	
Power-down	Ready to Idle State	—	—	10	ms	
MCLK input	Input reference frequency (MCLK_EXT)	TG Mode	2	—	24	MHz
		External Mode	4	—	60	MHz
	Duty cycle	TG Mode	40	—	60	%
		External Mode	45	—	55	%
Spread-spectrum modulation tolerance	Amplitude ³	–3	—	3	%	
	Frequency	—	—	60	kHz	
Phase-locked loop (PLL)/Delay-locked loop (DLL)	Input reference frequency	2	—	24	MHz	
	PLL lock time ^{4,5}	MCLK_EXT = 2 MHz	—	1	—	ms
		MCLK_EXT = 24 MHz	—	0.5	—	ms
	DLL lock time ⁶	MCLK_EXT = 2 MHz	—	0.6	—	ms
MCLK_EXT = 24 MHz		—	0.25	—	ms	

1. Measured from VDD_IO above its reset threshold.
2. It is recommended to confirm the device has reached the Idle State before configuring the control registers.
3. Note the instantaneous frequency must always be within the specified input range.
4. PLL1 lock time is measured from start of the transition from the Idle State to the Ready State (when **READY_EN** is set to 1).
5. PLL2 lock time is measured from when DLL1 lock is detected.
6. If PLL1 is enabled, DLL1 lock time is measured from when PLL1 lock is detected. If PLL1 is not enabled, DLL1 lock time is measured from start of the transition from the Idle State to the Ready State (when **READY_EN** is set to 1).

Table 3-9. Temperature Monitoring and Protection Characteristics

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = 3.3 V, VDD_LDO = 5.0 V; Ground = 0 V; voltages are with respect to ground.

Parameter	Minimum	Typical	Maximum	Unit
Overtemperature error threshold	—	155	—	°C
Overtemperature error threshold deviation ¹	–10	—	10	°C

1. The overtemperature error threshold deviation specifies the accuracy of the temperature-detection circuitry. This specification relates how many degrees above or below the threshold the overtemperature error circuitry may trigger.

Table 3-10. Device Power Consumption

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; input signal (Active State only) = 1.5 V pk-pk, 1 MHz sine wave; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Use Configuration		Typical	Maximum	Unit
Sleep State (MCLK stopped, oscillator disabled)	VDD_IO current T _A = +25 °C T _A = 0 °C to 85 °C	250 —	600 2500	μA
	VDD_A current	—	125	μA
	VDD_LDO current VDD_LDO = 5.0 V, LDO5 enabled ¹ VDD_LDO = 5.0 V, LDO5 disabled	— —	400 50	μA μA
Idle State (MCLK stopped, default register conditions)	VDD_IO current T _A = +25 °C T _A = 0 °C to 85 °C	600 —	950 3800	μA μA
	VDD_A current	—	125	μA
	VDD_LDO current VDD_LDO = 5.0 V, LDO5 enabled ¹ VDD_LDO = 5.0 V, LDO5 disabled	— —	400 50	μA μA
Active State, External Mode	Total power consumption ² MCLK = 6 MHz, sample rate = 2 MSPS, output rate = 12 Mbit/s per DOUT, Format ID = 2 (3 channels, 16-bit data, 8 x DOUT), low-power mode	55	—	mW
	Total power consumption ² MCLK = 60 MHz, sample rate = 20 MSPS, output rate = 120 Mbit/s per DOUT, Format ID = 2 (3 channels, 16-bit data, 8 x DOUT), high-performance mode	138	—	mW
Active State, TG Mode, CMOS input/output	Total power consumption ² MCLK = 2 MHz, sample rate = 2 MSPS, output rate = 12 Mbit/s per DOUT, Format ID = 22 (3 channels, 12-bit data, 6 x DOUT), low-power mode, PLL1 disabled	58	—	mW
	Total power consumption ² MCLK = 10 MHz, sample rate = 10 MSPS, output rate = 60 Mbit/s per DOUT, Format ID = 22 (3 channels, 12-bit data, 6 x DOUT), low-power mode, PLL1 disabled	129	—	mW
Active State, TG Mode, LVDS input/output	Total power consumption ³ MCLK = 6 MHz, sample rate = 6 MSPS, output rate = 84 Mbit/s per LVDS pair, Format ID = 31 (4 channels, 10-bit data, 3 x LVDS pairs), LVDS clock = 12 MHz, low-power mode, PLL1 disabled	173	—	mW
	Total power consumption ³ MCLK = 24 MHz, sample rate = 24 MSPS, output rate = 336 Mbit/s per LVDS pair, Format ID = 31 (4 channels, 10-bit data, 3 x LVDS pairs), LVDS clock = 48 MHz, high-performance mode, PLL1 disabled	264	—	mW
PLL	Incremental power consumption, PLL1 enabled	6	—	mW
LED Drivers	Incremental power consumption, LED current = 45 mA, fine current = full scale	1 LED enabled 2 LEDs enabled 3 LEDs enabled	1.8 3.2 4.4	mW mW mW

1. Assumes LDO4 is disabled; LDO5 is enabled under software control using the [LDO5_EN](#) bit.

2. Excluding power dissipated by DOUT drivers—assumes no load connected.


3. Includes power dissipated by LVDS drivers—assumes C_{LOAD} = 10 pF.

Table 3-11. Switching Specifications—Video Sample Timing (TG Mode)


Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter 1,2,3	Symbol	Minimum	Typical	Maximum	Unit
MCLK_EXT rising edge to DLL Tap 0, Clocking Mode 0	MCLK_EXT = 2.0 MHz	—	12	18	ns
	MCLK_EXT = 6.0 MHz	—	8	14	ns
	MCLK_EXT = 9.7 MHz	—	7	12	ns
	MCLK_EXT = 23.0 MHz	—	6.5	11	ns
Aperture delay from RSMP falling edge CDS mode	t _{RSMPD}	—	3	—	ns
Aperture delay from VSMP falling edge	t _{VSMPD}	—	3	—	ns
RSMP high period CDS mode	t _{RSMPH}	5	—	—	ns
VSMP high period	t _{VSMPH}	5	—	—	ns
				28	DLL Taps
AFECK high period	t _{AFECKH}	15	—	—	ns
VSMP falling edge to AFECK rising edge	t _{VA}	—	1	—	DLL Tap
AFECK falling edge to RSMP rising edge CDS mode	t _{AR}	0	—	—	ns
RSMP falling edge to VSMP rising edge CDS mode	t _{RV}	0.5	—	—	ns
AFECK falling edge to VSMP rising edge non-CDS mode	t _{AV}	0	—	—	ns

1. Video input timing—MCLK. If PLL1 is not used (Clocking Mode 0), DLL Tap 0 is derived from the MCLK rising edge.

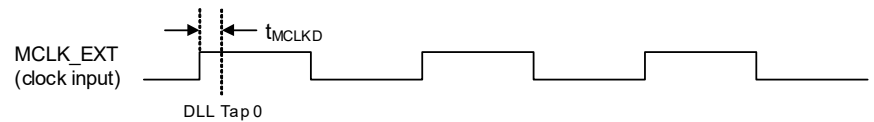

2. Video input timing—CDS mode. The VSMP and RSMP timing is referenced to DLL Tap 0. See Section 4.6.1 to configure the rise/fall timing.

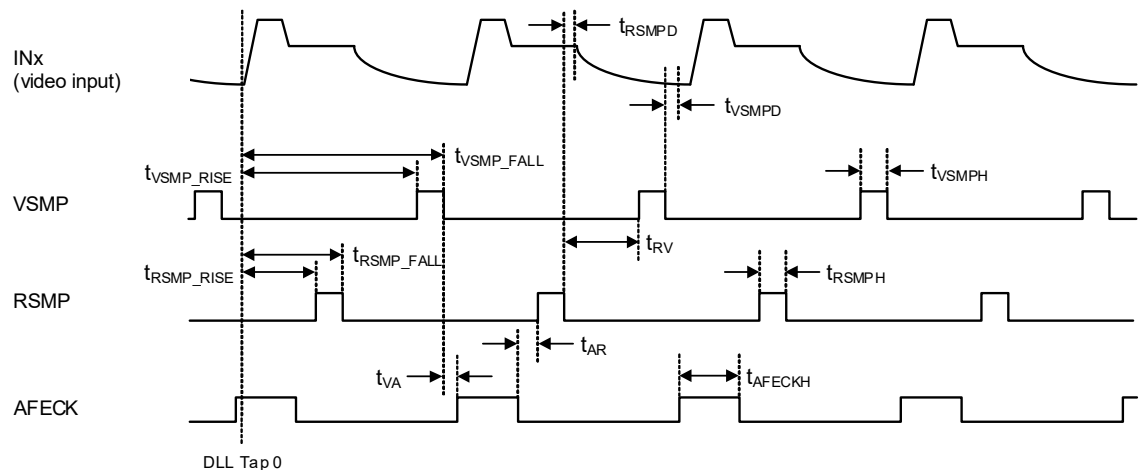

3. Video input timing—non-CDS mode. The VSMP timing is referenced to DLL Tap 0. See Section 4.6.1 to configure the rise/fall timing.


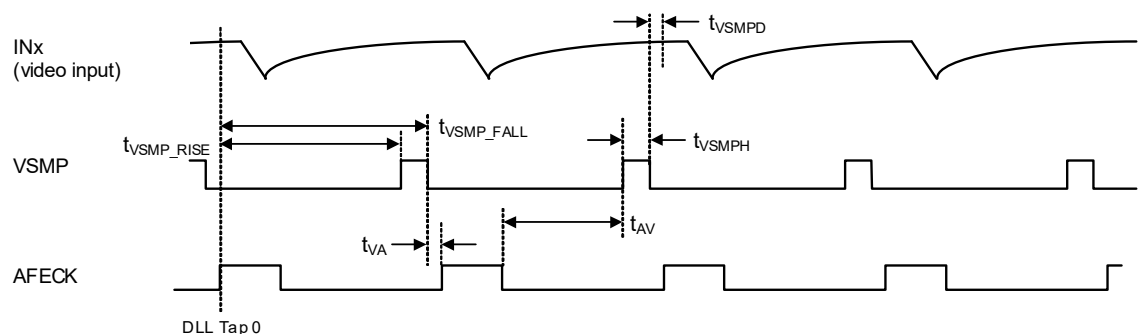


Table 3-12. Switching Specifications—TGSYNC/LEDSTART Timing (TG Slave Mode)

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter 1,2,3,4	Symbol	Minimum	Typical	Maximum	Unit
TGSYNC setup time to AFECK rising	t _{TGSU}	4	—	—	ns
TGSYNC hold time from AFECK rising TGSYNC filter disabled 5	t _{TGHO}	1	—	—	ns
LEDSTART setup time to TGSYNC active edge	t _{LSSU}	0	—	—	ns
LEDSTART hold time from TGSYNC inactive edge	t _{LSHO}	0	—	—	ns
Delay from TGSYNC pulse to pixel-counter reset 6	t _{COUNTD}	—	3	—	cycles

1. Assumes Clocking Mode 0; see Section 4.7.3.1 for Clocking Modes 1 and 2.
2. TGSYNC/LEDSTART timing. See Section 4.6.1 for details of AFECK.

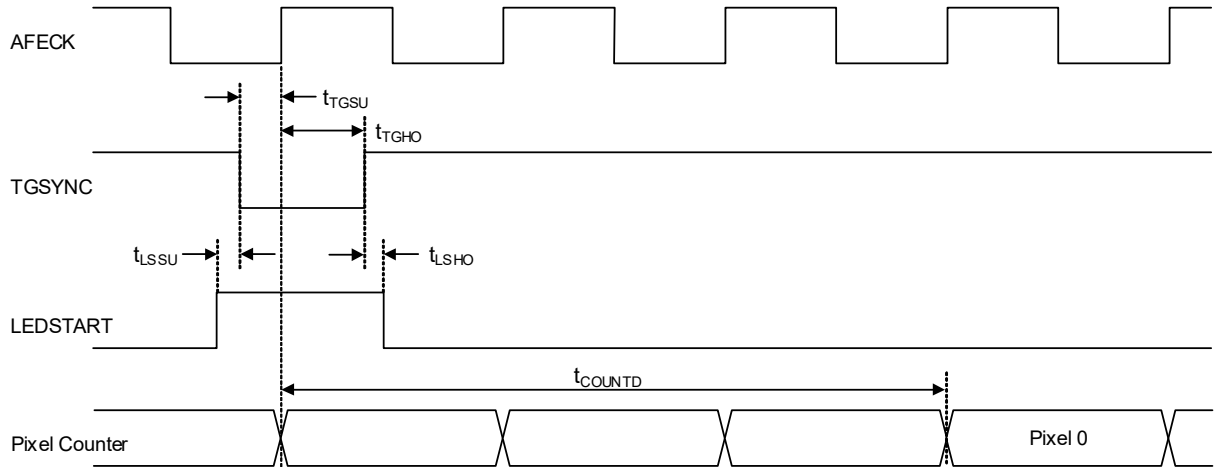


3. TGSYNC input is supported on three different pins—TGSYNC1, TGSYNC2, or LEDSTART.
4. LEDSTART input is only used if LEDSTART_SEQ_INIT is set.
5. See Section 4.7.3.1 for TGSYNC pulse-width requirement if TGSYNC filter is enabled.
6. Assumes TGSYNC_ASYNC = 1 for TG Mode.

Table 3-13. Switching Specifications—Video Sample Timing (External Mode 1)

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter 1,2		Symbol	Minimum	Typical	Maximum	Unit
Aperture delay from RSMP falling edge	CDS mode	t _{RSMPD}	—	8	—	ns
Aperture delay from VSMP falling edge		t _{VSMPD}	—	5	—	ns
RSMP high period	CDS mode	t _{RSMPH}	5	—	—	ns
VSMP high period		t _{VSMPH}	5	—	—	ns
AFECK high period		t _{AFECKH}	15	—	—	ns
RSMP falling edge to VSMP rising edge	CDS mode	t _{RV}	0	—	—	ns
AFECK falling edge to RSMP rising edge	CDS mode	t _{AR}	0	—	—	ns
AFECK falling edge to VSMP rising edge	non-CDS mode	t _{AV}	0	—	—	ns
MCLK rising edge to VSMP rising edge		t _{MHVH}	0	—	—	ns
MCLK falling edge to VSMP falling edge		t _{VLMH}	0	—	—	ns
VSMP falling edge to MCLK rising edge		t _{VLMH}	2	—	—	ns

1. Video input timing—CDS mode. The VSMP and RSMP timing is controlled by external signals VSMP_EXT and RSMP_EXT.

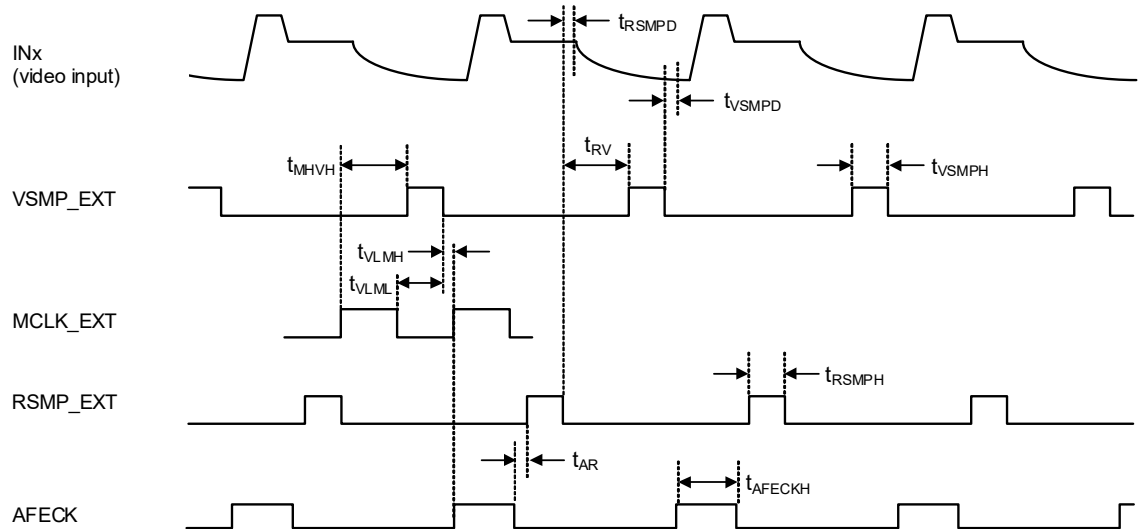

2. Video input timing—non-CDS mode. The VSMP timing is controlled by external signal VSMP_EXT.


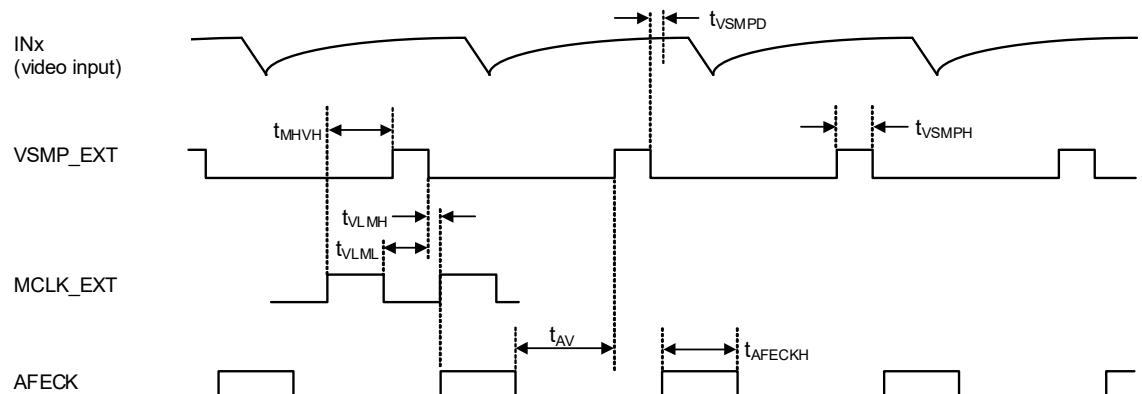


Table 3-14. Switching Specifications—Video Sample Timing (External Mode 2)


Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter 1,2		Symbol	Minimum	Typical	Maximum	Unit
Aperture delay from RSMP falling edge	CDS mode	t _{RSMPD}	—	8	—	ns
Aperture delay from VSMP falling edge		t _{VSMPD}	—	5	—	ns
RSMP high period	CDS mode	t _{RSMPH}	—	1	—	MCLK ³
VSMP high period		t _{VSMPH}	—	1	—	MCLK ³
AFECK high period		t _{AFECKH}	15	—	—	ns
RSMP falling edge to VSMP rising edge	CDS mode	t _{RV}	0	—	—	ns
AFECK falling edge to RSMP rising edge	CDS mode	t _{AR}	0.5	—	—	MCLK ³
AFECK falling edge to VSMP rising edge	non-CDS mode	t _{AV}	0	—	—	ns
VSMP_EXT rising edge to MCLK rising edge		t _{VHMH}	1	—	—	ns
MCLK rising edge to VSMP_EXT falling edge		t _{MHVL}	2.7	—	—	ns

1. Video input timing—CDS mode. The VSMP and RSMP timing is controlled by external signal VSMP_EXT, retimed to MCLK_EXT.

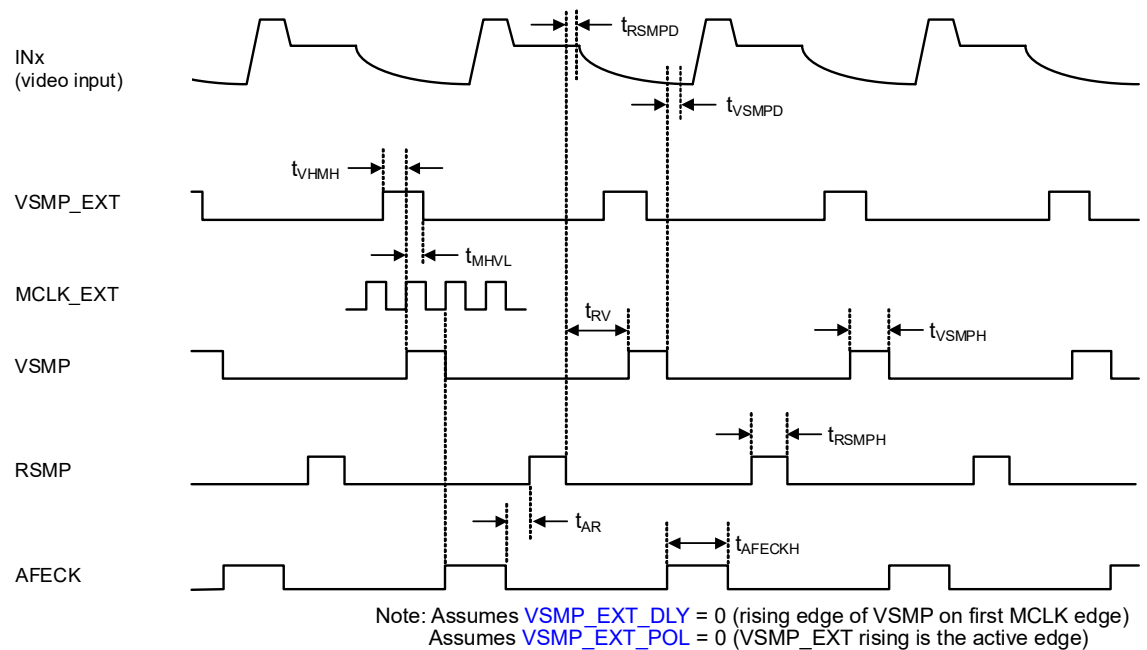

2. Video input timing—non-CDS mode. The VSMP timing is controlled by external signal VSMP_EXT, retimed to MCLK_EXT.

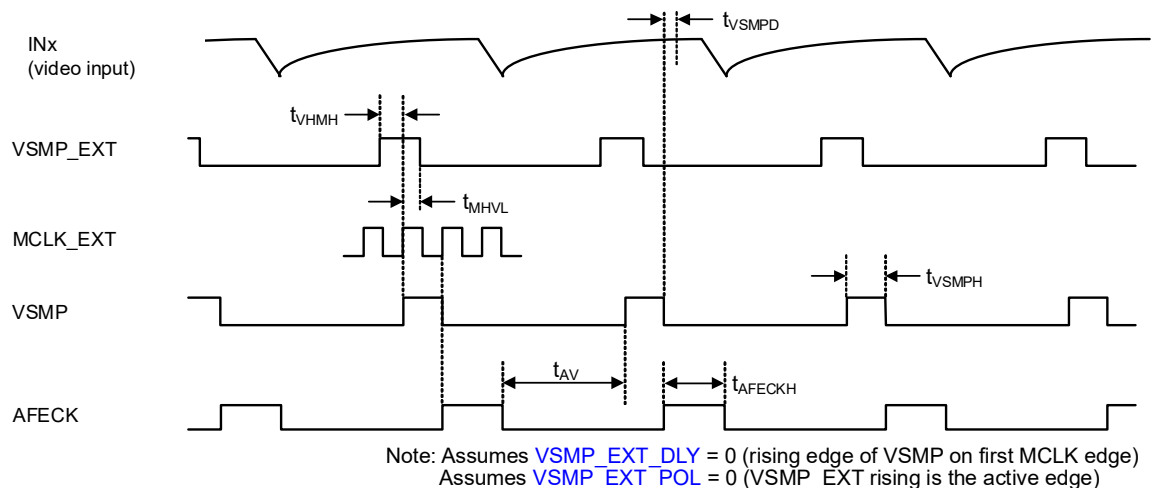


3. The MCLK unit refers to one period of the MCLK_EXT clock.

Table 3-15. Switching Specifications—MCLK Mask Timing (External Mode)

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter 1,2,3	Symbol	Minimum	Typical	Maximum	Unit
MCLK Mask input setup time to MCLK rising	t _{MKSU}	5	—	—	ns
MCLK Mask input hold time from MCLK rising	t _{MKHO}	5	—	—	ns

1. Applies to External Mode 1 and External Mode 2.
2. MCLK Mask timing. Assumes mask input polarity is rising-edge triggered.

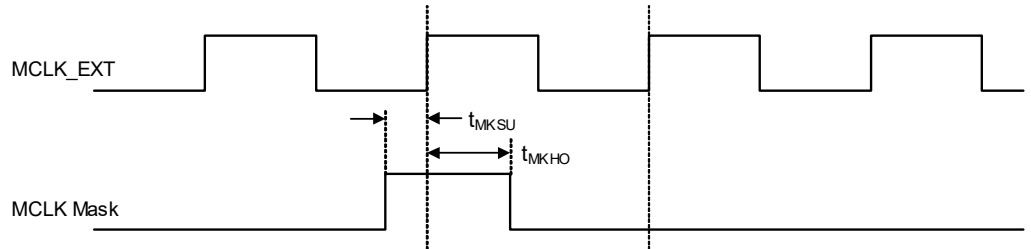


3. MCLK Mask input is supported on seven different pins—LEDR_EN, LEDG_EN, LEDB_EN, TGSYNC1, TGSYNC2, LED_START, or GPIO4.

Table 3-16. Switching Specifications—TGSYNC/LEDSTART Timing (External Mode)

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; T_A = +25 °C for typical specifications, T_A = 0 °C to 85 °C for min/max specifications.

Parameter 1,2,3,4	Symbol	Minimum	Typical	Maximum	Unit
TGSYNC setup time to MCLK rising	t _{TGSU}	2	—	—	ns
TGSYNC hold time from MCLK rising	t _{TGHO}	2.5	—	—	ns
LEDSTART setup time to MCLK rising	t _{LSSU}	1.8	—	—	ns
LEDSTART hold time from MCLK rising ⁵	t _{LSHO}	1.7	—	—	ns
Delay from TGSYNC pulse to pixel-counter reset ⁶	t _{COUNTD}	—	2	—	cycles

1. Applies to External Mode 1 and External Mode 2. Assumes the TGSYNC filter is disabled; see Section 4.7.3.1 for details of the TGSYNC filter.
2. TGSYNC/LEDSTART timing.



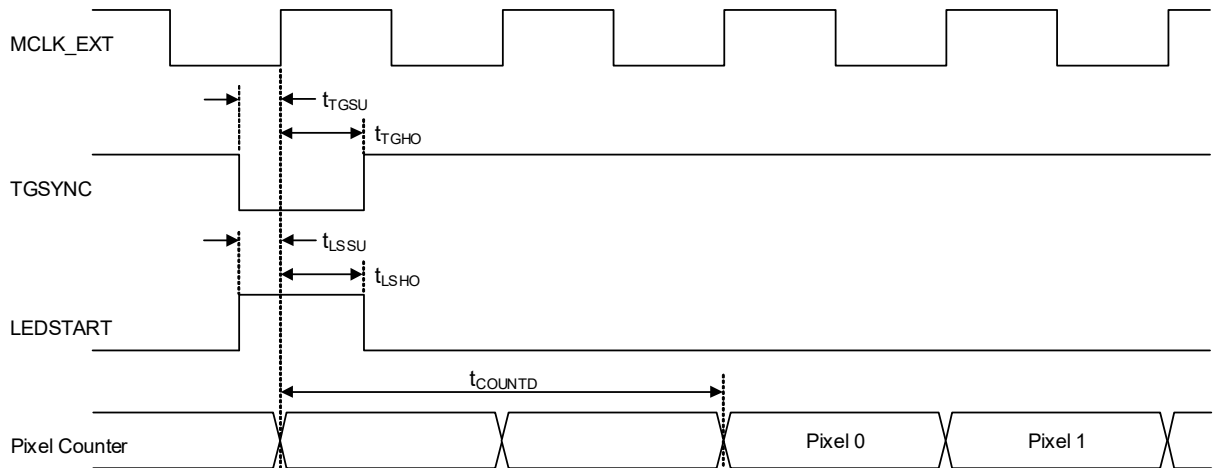


3. TGSYNC input is supported on three different pins—TGSYNC1, TGSYNC2, or LEDSTART.
4. LEDSTART input is only used if LEDSTART_SEQ_INIT is set.
5. LEDSTART hold time is measured from the second MCLK rising edge after the LEDSTART active edge.
6. Assumes TGSYNC_ASYNC = 0 for External Mode.

Table 3-17. Switching Specifications—Data Output

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; Load capacitance = 10 pF; T_A = 0 °C to 85 °C.

Parameter 1,2,3		Symbol	Minimum	Typical	Maximum	Unit	
CMOS (TG) Mode	Clock frequency	—	—	—	60	MHz	
	Data output skew	t _{SKOP}	-200	—	900	ps	
CMOS (External) Mode	Propagation delay	t _{PD}	6	—	12	ns	
	Output enable time	TDM Mode t _{PAZE}	—	—	12	ns	
	Output disable time	TDM Mode t _{PAEZ}	—	—	12	ns	
LVDS output	Clock frequency ⁴	DCLKOUT_P/_N output f _{LVCK}	—	—	72	MHz	
	Data rate per output pair	—	—	—	504	Mbit/s	
	Data output rise time (20 % to 80 %)	3.6 mA drive strength	t _{LVTR}	100	—	250	ps
		1.2 mA drive strength	—	160	—	330	ps
	Data output fall time (80 % to 20 %)	3.6 mA drive strength	t _{LVTf}	100	—	250	ps
		1.2 mA drive strength	—	160	—	330	ps
	Data output transition timing (t _{LVCK} = 1 / f _{LVCK})	Bit 4	t _{LVDn}	-250	0	250	ps
Bit 3		—	t _{LVCK} /7 - 250	t _{LVCK} /7	t _{LVCK} /7 + 250	ps	
Bit 2		—	2t _{LVCK} /7 - 250	2t _{LVCK} /7	2t _{LVCK} /7 + 250	ps	
Bit 1		—	3t _{LVCK} /7 - 250	3t _{LVCK} /7	3t _{LVCK} /7 + 250	ps	
Bit 0		—	4t _{LVCK} /7 - 250	4t _{LVCK} /7	4t _{LVCK} /7 + 250	ps	
Bit 6		—	5t _{LVCK} /7 - 250	5t _{LVCK} /7	5t _{LVCK} /7 + 250	ps	
Bit 5	—	6t _{LVCK} /7 - 250	6t _{LVCK} /7	6t _{LVCK} /7 + 250	ps		

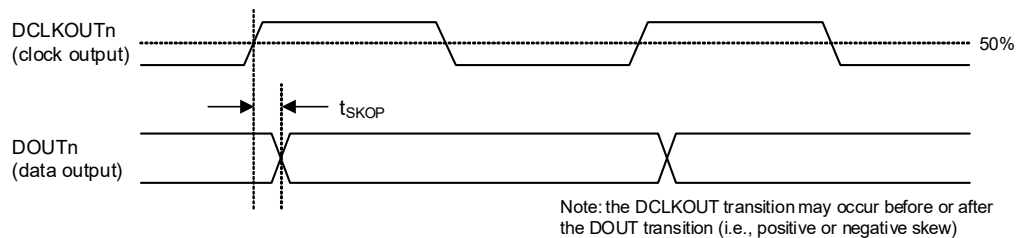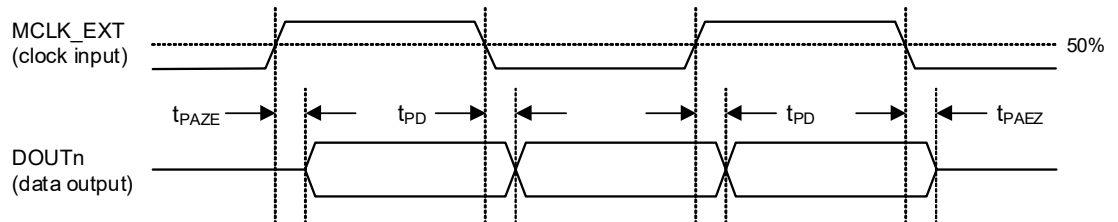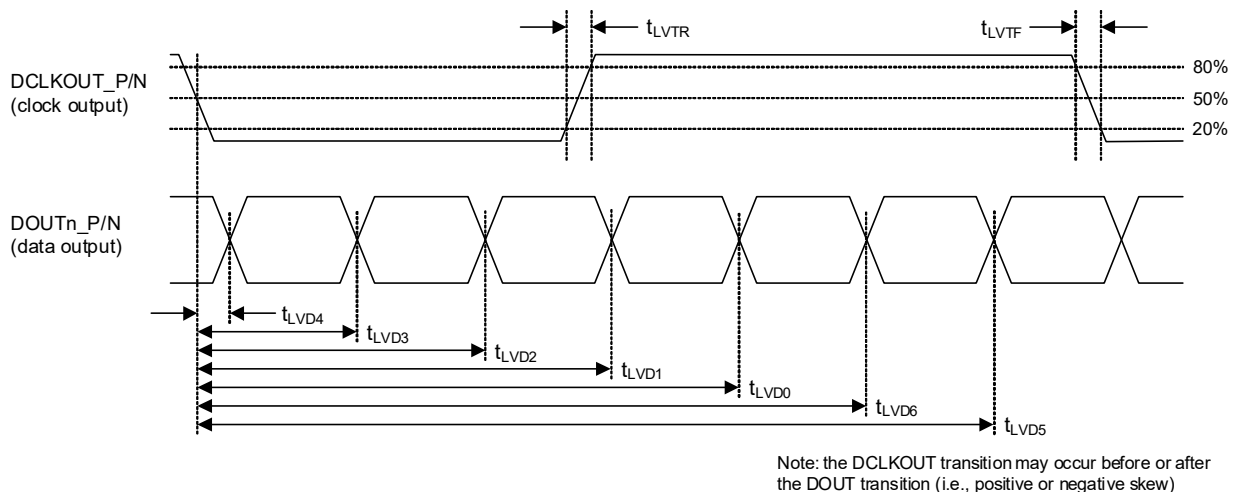1. Output data timing—CMOS (TG) Mode.

2. Output data timing—CMOS (External) Mode.

3. Output data timing—Low-voltage differential signaling (LVDS).


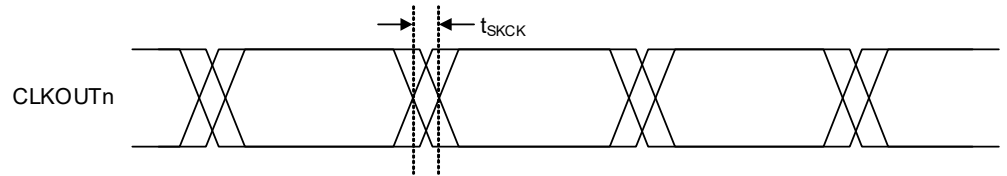
4. Assumes spread-spectrum modulation is disabled. If spread-spectrum modulation is enabled, the maximum instantaneous frequency may be higher.

Table 3-18. Switching Specifications—Clock Output

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; Load capacitance = 20 pF; T_A = 0–85°C.

Parameter		Symbol	Minimum	Typical	Maximum	Unit
Pulse waveform clocks (P_CK)	Output skew 1,2	t _{SKCK}	0	—	1	ns
	Outputs with same CLKOUTx_POL		0	—	4	ns
	Propagation delay	—	—	0	—	ns
			PCKx_DLY = 0x0	—	1.5	—
PCKx_DLY = 0x1			—	2.0	—	ns
PCKx_DLY = 0x2	—	3.5	—	ns		
PCKx_DLY = 0x3	—	—	—	—	ns	
High speed clocks (C_CK)	Output skew 1,3	t _{SKCK}	0	—	1	ns
	Outputs with same CLKOUTx_POL		0	—	4	ns
	Outputs with different CLKOUTx_POL		0	—	4	ns

1. Clock output skew. CLKOUT1–4 can be configured for high-speed clock outputs (C_CK) or pulse-waveform clock (P_CK) output.



2. Variation in timing between different P_CK outputs configured to toggle at the same pixel count. Assumes the same PCKx_DLY setting in each case.

3. Variation in timing between different C_CK outputs configured to toggle at the same DLL tap.

Table 3-19. Switching Specifications—Monitor Output

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; Load capacitance = 10 pF; T_A = 0–85°C.

Parameter 1	Symbol	Minimum	Typical	Maximum	Unit
Propagation delay VSMP, RSMP	t _{PD}	—	2.5	—	ns

1. Output data timing.


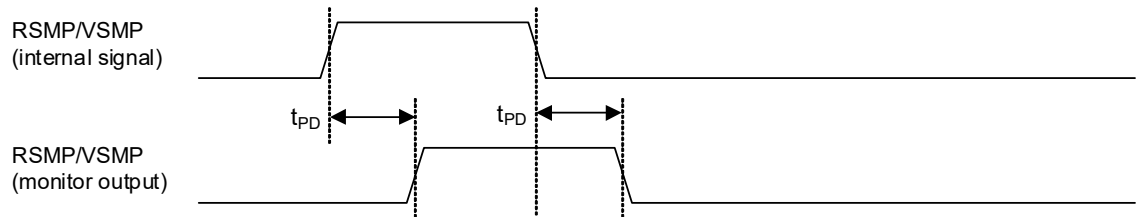


Table 3-20. Switching Specifications—I²C Control Port

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; input timings are measured at V_{IL} and V_{IH} thresholds, output timings are measured at V_{OL} and V_{OH} thresholds for CMOS input/output (as specified in Table 3-6); T_A = 0–85°C.

Parameter ¹	Symbol	Minimum	Maximum	Unit
SCL clock frequency	f _{SCL}	—	1000	kHz
Clock low time	t _{LOW}	500	—	ns
Clock high time	t _{HIGH}	260	—	ns
Start condition hold time (before first clock pulse)	t _{HDST}	260	—	ns
Setup time for repeated start	t _{SUST}	260	—	ns
Rise time of SCL and SDA	f _{SCL} ≤ 100 kHz	600	1000	ns
	100 kHz < f _{SCL} ≤ 400 kHz	180	300	ns
	400 kHz < f _{SCL} ≤ 1000 kHz	72	120	ns
Fall time of SCL and SDA	f _{SCL} ≤ 100 kHz	6.5	300	ns
	100 kHz < f _{SCL} ≤ 400 kHz	6.5	300	ns
	400 kHz < f _{SCL} ≤ 1000 kHz	6.5	120	ns
Rise time variation between SDA and SCL	—	—	1.67	x
Fall time variation between SDA and SCL	f _{SCL} ≤ 100 kHz	—	100	ns
	100 kHz < f _{SCL} ≤ 400 kHz	—	100	ns
	400 kHz < f _{SCL} ≤ 1000 kHz	—	75	ns
Setup time for stop condition	t _{SUSP}	260	—	ns
SDA setup time to SCL rising	t _{SUD}	50	—	ns
SDA input hold time from SCL falling ²	t _{HDDI}	0	—	ns
Output data valid (Data/ACK) ³	f _{SCL} ≤ 100 kHz	—	3450	ns
	100 kHz < f _{SCL} ≤ 400 kHz	—	900	ns
	400 kHz < f _{SCL} ≤ 1000 kHz	—	450	ns
Bus free time between transmissions	t _{BUF}	500	—	ns
SDA bus capacitance	C _B	—	400	pF
SCL/SDA pull-up resistance	R _P	500	—	Ω
Pulse width of spikes to be suppressed	t _{ps}	0	50	ns

1. I²C control-port timing.

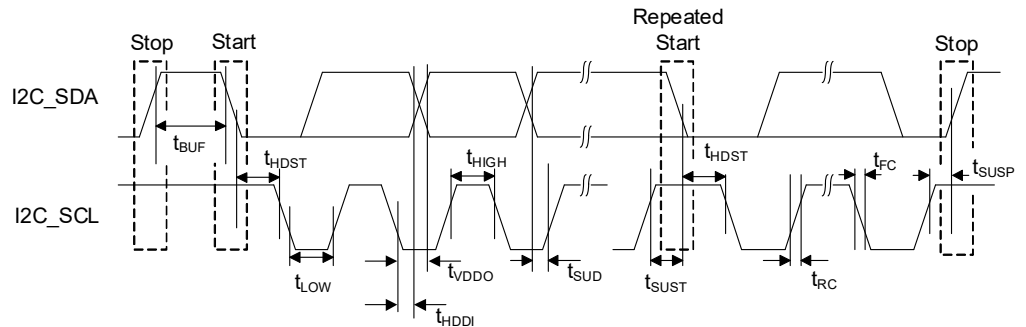

2. Data must be held long enough to bridge the transition time, t_{FC}, of SCL.


3. Time from falling edge of SCL until data output is valid.

Table 3-21. Switching Specifications—SPI Port

Test conditions (unless specified otherwise in this table): VDD_A = VDD_IO = VDD_LDO = 3.3 V; Ground = 0 V; voltages are with respect to ground; input timings are measured at V_{IL} and V_{IH} thresholds, output timings are measured at V_{OL} and V_{OH} thresholds for CMOS input/output (as specified in Table 3-6); T_A = 0–85°C.

Parameter ¹	Symbol	Minimum	Maximum	Unit
SPI_SCK frequency ^{2,3}	1/t _{SCY}	—	12	MHz
SPI_CS falling edge to SPI_SCK rising edge	t _{SSU}	60	—	ns
SPI_SCK falling edge to SPI_CS rising edge	t _{SHO}	20	—	ns
SPI_SCK pulse width low	t _{SCL}	33	—	ns
SPI_SCK pulse width high	t _{SCH}	33	—	ns
SPI_SDI to SPI_SCK setup time	t _{DSU}	20	—	ns
SPI_SDI to SPI_SCK hold time	t _{DHO}	20	—	ns
SPI_SCK falling edge to SPI_SDO transition	t _{DL}	0	33	ns
SPI_CS rising edge to SPI_SDO output high-Z	t _{SDHZ}	0	22	ns
Bus free time between active SPI_CS ³	t _{SH}	9/f _{SYSCLK}	—	ns
DOUT disable time from SPI_CS falling edge ⁴	Shared Bus Mode t _{DHZ}	—	8	ns
DOUT enable time from SPI_CS rising edge ^{4,5}	Shared Bus Mode t _{DEN}	4	—	ns
DOUT disable time from GPI12 falling edge ⁶	Shared Bus Mode, GPI12_DOUT_CTRL = 1	—	10	ns
DOUT enable time from GPI12 rising edge ⁶	Shared Bus Mode, GPI12_DOUT_CTRL = 1	4	—	ns

1. SPI control-port timing.

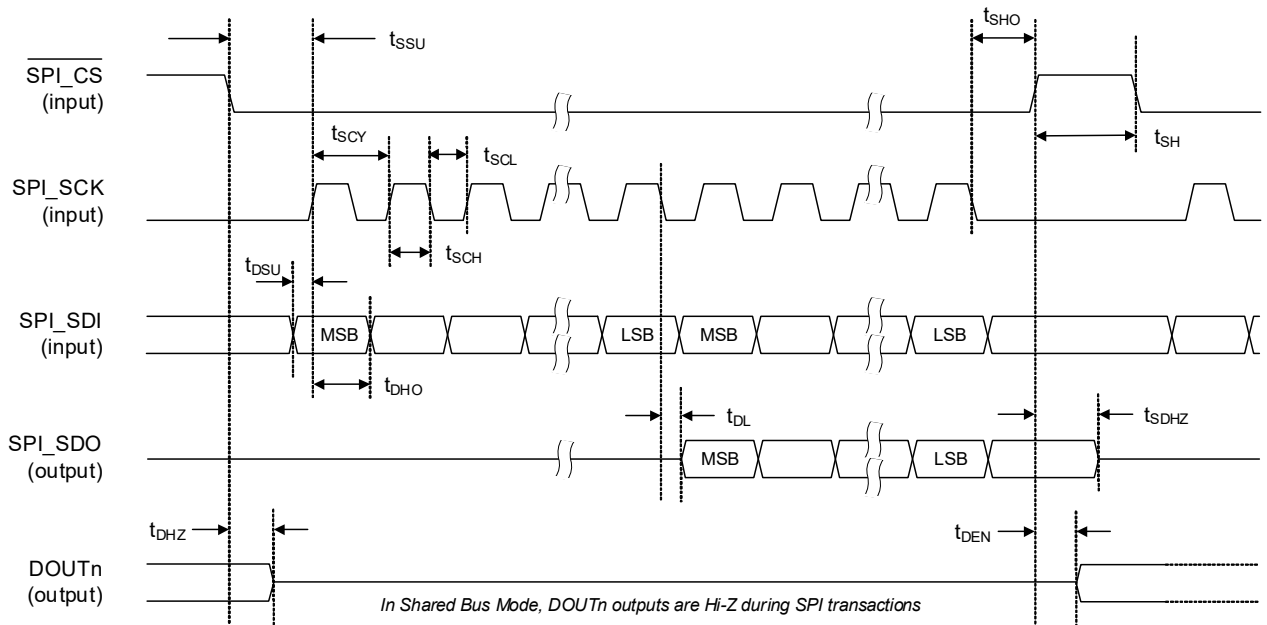

2. The SPI_SCK frequency must not exceed the system clock frequency (SYSCLK).

3. The system clock frequency (SYSCLK) is a function of the device state (see Section 4.2) and the sample-timing mode (see Section 4.6):

- In Idle State, SYSCLK = 16 MHz.
- In Ready/Active states, TG Mode, SYSCLK = pixel sample rate (i.e., PLL1 output, if used; MCLK_EXT input if PLL1 is not used).
- In Ready/Active states, External Mode, SYSCLK = MCLK_EXT/n, where n is number of channels in the digital output format (see Table 4-5).

4. In Shared Bus Mode, the DOUTn data outputs are disabled (Hi-Z) whenever SPI_CS is asserted (see Section 4.10.2.3).

5. In Shared Bus Mode, some operational constraints must be observed to avoid contention between SPI_SDO and DOUTn (see Section 4.10.2.3).

6. In Shared Bus Mode, if GPI12_DOUT_CTRL = 1, the DOUTn data outputs are disabled (Hi-Z) whenever GPI12 is Logic 0.

4 Functional Description

4.1 Power Supplies and Reset

The CS82L44 is powered using VDD_A, VDD_IO, and VDD_LDO external supplies.

- **VDD_A** is the supply rail for the analog circuits, including internal regulators LDO1 and LDO3. VDD_A can be powered directly from an external source, or can be generated from VDD_LDO using the internal regulator LDO4. The VDD_A supply is not required in the Idle and Sleep states; the VDD_A supply can be disabled in these states to reduce power consumption. Note the sensor must also be powered down if VDD_A is disabled, to ensure the INx analog input voltage does not exceed VDD_A.

The VDD_A status is indicated using [VDDA_STS](#). A valid VDD_A (internal or external) must be present when transitioning to the Ready or Active states. Sampling and conversion is not supported if VDD_A is not present.

- **VDD_IO** is the supply rail for digital input/output; it also powers other digital circuits via internal regulator LDO2. VDD_IO can be powered directly from an external source, or can be generated from VDD_LDO using the internal regulator LDO5.

Note that, if the LDO5 regulator is used to generate the VDD_IO supply, an external connection is required between the VLDO5 and VDD_IO pins.

- **VDD_LDO** is the supply rail for internal regulators LDO4 and LDO5. The regulators can be used to generate the VDD_A and VDD_IO supplies, and also to provide power to an external sensor. See [Section 4.1.1](#) and [Section 4.1.2](#) to configure these regulators.

The VDD_LDO voltage must always be greater than or equal to VDD_A. If VDD_A is powered externally, VDD_LDO must be enabled before VDD_A; the VDD_A supply must be disabled before VDD_LDO.

If the LDO4/LDO5 regulators are not used, the VDD_LDO supply must be tied to VDD_A, or to a higher voltage such as a 5 V rail.

Note that all digital inputs must be held low until VDD_IO is within the recommended operating limits. Analog video input must not be applied until VDD_A is within recommended operating limits. See [Table 3-2](#) for maximum ratings.

4.1.1 LDO4 Regulator

The LDO4 regulator can be used to generate a 3.3 V analog supply for VDD_A. The LDO4 regulator is enabled using the LDO_EN pin—connect to VDD_LDO to enable the LDO, or connect to GND to disable. The LDO can also be enabled by setting [LDO4_EN](#).

The LDO_EN input pin controls LDO4 and LDO5. The LDO_EN control can be masked using [LDO_EN_MASK](#). If this bit is set, the LDO_EN input has no effect on the regulators; this can be used to allow independent control of LDO4 and LDO5, even if the hardware input is asserted—see [Section 4.1.3](#) for example control sequences.

The VDD_A supply is not required in the Idle and Sleep states; if VDD_A is powered from LDO4, the LDO can be disabled in these states to reduce power consumption. Note that the sensor must also be powered down in this case. After enabling the LDO4 regulator, a start-up delay of 1 ms should be allowed before transitioning to the Active State.

If the LDO4 regulator is under software control (i.e., the LDO_EN input is masked or deasserted), it can only be enabled or disabled in the Idle State. If [LDO4_EN](#) is written in any other state, the update does not take effect until the device returns to the Idle State. See [Section 4.2](#) for details of the CS82L44 operational states.

If the LDO4 regulator is under software control, it is disabled by default, supporting external VDD_A supply. Note that the LDO must not be enabled if an external VDD_A supply is present.

The LDO4 output can be configured in a high-impedance (Hi-Z) state using [LDO4_HIZ](#). Note that setting this bit disables the LDO, regardless of the [LDO4_EN](#) bit or LDO_EN hardware control. If an external VDD_A supply is used, it is recommended to set [LDO4_HIZ](#) in order to reduce power dissipation through the discharge path.

4.1.2 LDO5 Regulator

The LDO5 regulator can be used to provide power to an external sensor; it can also be used to generate the VDD_IO supply. The output voltage is configured using [LDO5_VOUT](#).

The LDO5 regulator is enabled using the LDO_EN pin—connect to VDD_LDO to enable the LDO, or connect to GND to disable. The LDO can also be enabled by setting [LDO5_EN](#).

The LDO_EN input pin controls LDO4 and LDO5. The LDO_EN control can be masked using [LDO_EN_MASK](#). If this bit is set, the LDO_EN input has no effect on the regulators; this can be used to allow independent control of LDO4 and LDO5, even if the hardware input is asserted—see [Section 4.1.3](#) for example control sequences

Notes: It is recommended that the LDO5 regulator should not be used to power an external sensor at the same time as providing the VDD_IO supply. Noise associated with the VDD_IO supply may be detrimental to the performance of an external sensor connected to the same node. If LDO5 is used to power an external sensor and VDD_IO, care should be taken to ensure VDD_IO noise is within acceptable range for the sensor.

If LDO5 is used to power the external sensor, the LDO5 regulator must not be enabled if VDD_A is disabled. In typical use cases, this means LDO5 must not be enabled if LDO4 is disabled.

If LDO5 is used to generate the VDD_IO supply, the LDO must be enabled using the LDO_EN pin. Care must be taken when controlling the LDOs to avoid interrupting the VDD_IO supply.

If the LDO_EN pin is used to control LDO5, care must be taken to ensure the switching edges are free of bounce/chatter. To avoid overshoot, the LDO output must be fully discharged before re-enabling the LDO.

The LDO5 regulator supports a configurable current limit, including a dynamic control that is proportional to the output voltage. Proportional control (VPC) is enabled by default and can be used to suppress inrush currents in the load. The current limit is configured using [LDO5_ILIMIT_CTRL](#). Note that the valid selections vary depending on whether VPC is enabled. If VPC is enabled ([LDO5_ILIMIT_VPC](#) = 1), the limit is approximated by the following formula:

$$\text{Current Limit (mA)} = I_{\text{LDO5_ILIMIT_CTRL}} + (V_{\text{LDO5}} \times 60)$$

The output of the LDO regulator is provided on the VLDO5 pin. If LDO5 is used to generate the VDD_IO supply, an external connection is required between VLDO5 and VDD_IO.

4.1.3 Typical Power-Supply Configurations

Typical power-supply configurations for the CS82L44 are shown in [Fig. 4.1.3.1](#) through [Fig. 4.1.3.3](#).

4.1.3.1 Dual Supply (5 V, 3.3 V)

[Fig. 4-1](#) shows the CS82L44 powered using 5 V and 3.3 V external supplies. The 5 V supply powers the external sensor (using LDO5) and the analog circuits (using LDO4). A separate 3.3 V supply powers the digital circuits.

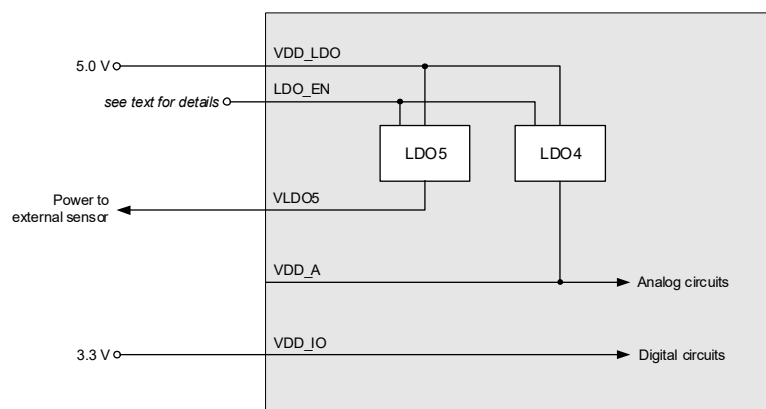


Figure 4-1. Dual Supply (5 V, 3.3 V)

In this configuration, the LDO4 and LDO5 can be controlled to suit the application requirements. The LDO_EN pin can be used in the following ways:

- **LDO_EN tied to GND.** LDOs are disabled by default and controlled in software using [LDO4_EN](#) and [LDO5_EN](#).
- **LDO_EN tied to VDD_LDO.** LDOs are enabled by default.
- **LDO_EN controlled by host.** The LDOs are controlled by an external device driving the LDO_EN pin.

If both LDOs are enabled using the LDO_EN pin, the following control sequence can be used to disable the sensor while maintaining VDD_A:

1. Set [LDO4_EN](#)
2. Set [LDO5_EN](#)
3. Set [LDO_EN_MASK](#)
4. Clear [LDO5_EN](#) to disable LDO5

Note that LDO4 must not be disabled while LDO5 is enabled—this would result in an input voltage applied while VDD_A is disabled. Equivalently, LDO5 must not be enabled while LDO4 is disabled.

4.1.3.2 Single/Dual Supply (3.3 V)

[Fig. 4-2](#) shows the CS82L44 powered using 3.3 V external supplies. The analog and digital power can be provided separately, or else from a single supply. Note the VDD_LDO connection must be tied to VDD_A in this case.

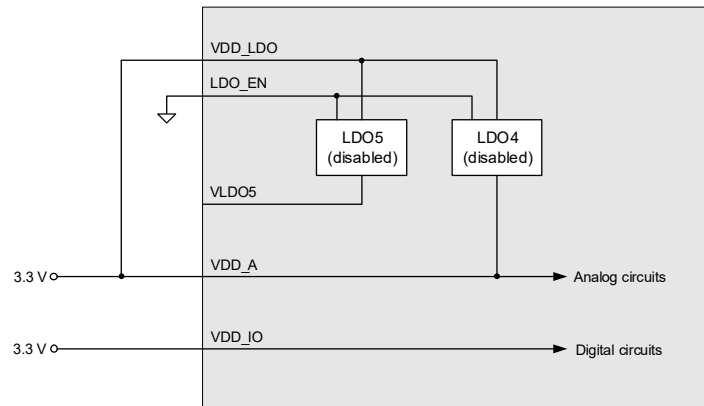


Figure 4-2. Single/Dual Supply (3.3 V)

In this configuration, the LDO regulators are not used. The regulators must remain disabled at all times.

4.1.3.3 Single Supply (5 V)

Fig. 4-3 shows the CS82L44 powered using a single 5 V external supply. The LDO5 regulator provides power to the external sensor, and to the digital circuits via VDD_IO. The LDO4 regulator powers the analog circuits.

Note that powering the external sensor and VDD_IO from a common supply can be detrimental to the performance of the sensor. In this configuration, care should be taken to provide adequate filtering to minimize noise associated with the VDD_IO supply reaching the sensor.

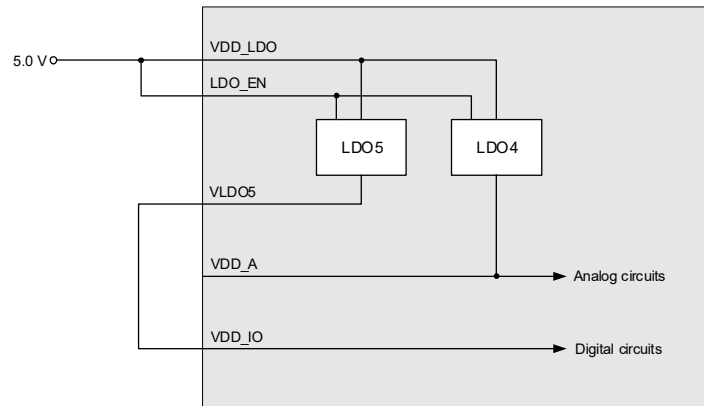


Figure 4-3. Single Supply (5 V)

In this configuration, the LDO regulators are enabled at power-up and must remain enabled at all times. Software control of the LDO enable/disable functions should not be used in this configuration.

4.1.4 Resets

The CS82L44 is in reset if the VDD_IO or VDD_LDO supply is below the respective reset threshold defined in Table 3-7. The POR sequence is scheduled on initial power-up, and following any interruption to VDD_IO or VDD_LDO that results in a drop below the reset threshold. The POR causes all of the CS82L44 control registers to be reset to their default states.

A software reset is triggered by writing 0x5A to the SFT_RESET field. A software reset causes all of the CS82L44 control registers to be reset to their default states.

On completion of the reset and associated start-up processes, the device transitions to the Idle State (see Section 4.2).

4.2 Operational States

The CS82L44 behavior is defined according to its operational states as follows:

- **Start-Up.** This is the initial state following reset, in which the device performs necessary start-up processes. On successful completion of start-up, the device automatically transitions to the Idle State.
- **Idle.** This is a low-power state in which the device can be configured for the required operational behavior. Register access is supported on the I²C/SPI control interface. After configuring the device, the host can command the device to transition to the Ready State.
- **Ready.** In this state, the analog input path and internal clocking circuits are fully enabled. The data-output clock is enabled, ready to support sample data in the configured format. In this state, the host can select the Active State when required.
- **Active.** This is the fully operational state, supporting active sampling and data output. The external sensor timing signals (CLKOUTn) are enabled, along with the internal pixel counters and associated functions.
- **Error.** This is the error state. See Section 4.2.1 for further details.
- **Sleep.** This is a dormant state with very low power consumption. Note that register access is not possible in this state, other than to wake the device to the Idle State.

The operational state transitions are shown in Fig. 4-4.

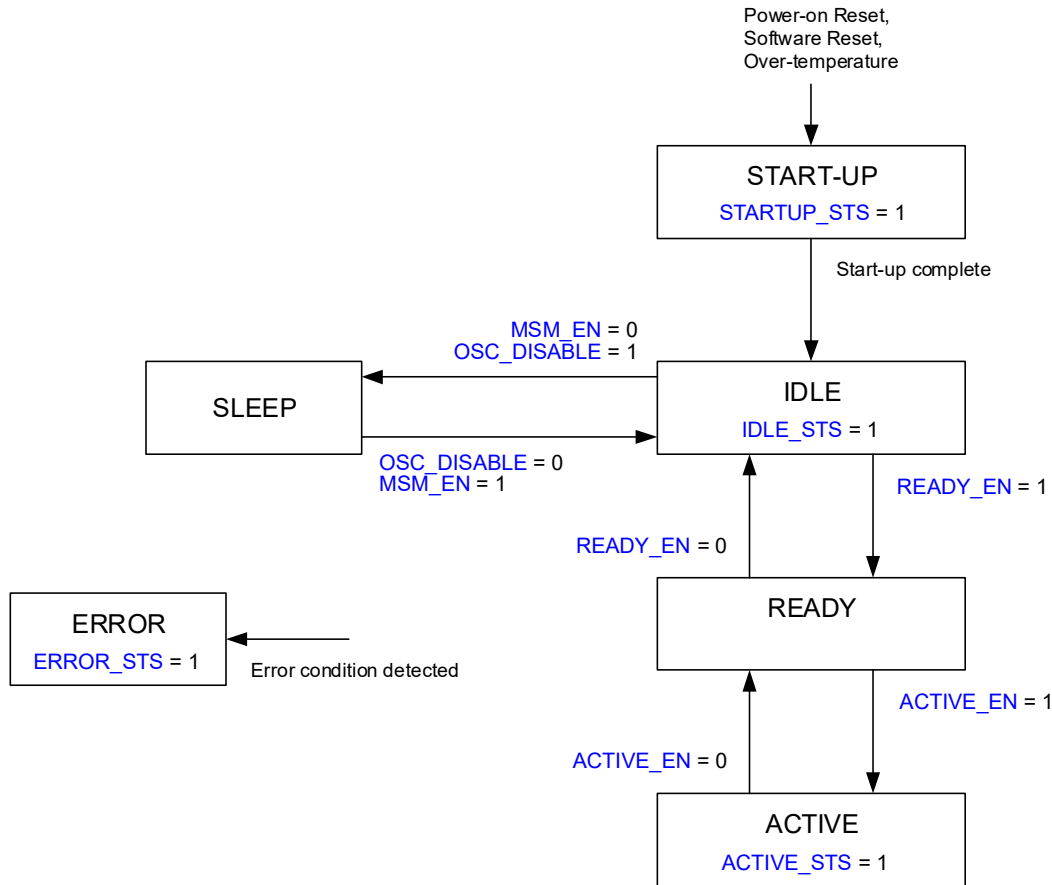


Figure 4-4. Operational States

The Start-Up State is indicated using [STARTUP_STS](#). On successful completion of start-up, the device automatically transitions to the Idle State.

The Idle State is indicated using [IDLE_STS](#). The CS82L44 is configured in the Idle State using the control interface (see [Section 4.10](#)). The transition from the Idle State to the Ready State is selected by setting [READY_EN](#).

Notes: By default, the selected data-output format is enabled in the Ready State (the data bits and status flags are held at 0). If [DOUT_READY_EN](#) is cleared, the data output is not enabled in the Ready State. In all cases, the selected data-output format is fully enabled in the Active State.

If an invalid data-output format is selected, the transition from Idle to Ready is prevented, and the device remains in the Idle State. See [Section 4.5](#) for further details of the data-output formats.

The Ready State is indicated using [READY_STS](#). The transition from the Ready State to the Active State is selected by setting [ACTIVE_EN](#).

The Active State is indicated using [ACTIVE_STS](#). The transition from the Active State to the Ready State is selected by clearing [ACTIVE_EN](#).

Note: The transition from Active to Ready is configurable using [COMPLETE_LINE](#). If this bit is set, the CS82L44 completes the current scan line before transitioning to the Ready State. The end of line is assumed to correspond to the next sequence-state transition. This feature is supported in TG Master Mode only. See [Section 4.7](#) for further details of the TG Sync and sequence-state options.

In the Ready State, the transition to the Idle State is selected by clearing [READY_EN](#).

The Error State is selected if an error condition is detected; this is indicated using [ERROR_STS](#). See [Section 4.2.1](#) for further details.

The Sleep State is selected by clearing [MSM_EN](#), then setting [OSC_DISABLE](#). To exit the Sleep State, the host must clear [OSC_DISABLE](#), then set [MSM_EN](#). On exiting the Sleep State, the device transitions to the Idle State.

Note: The Sleep State should only be selected from the Idle State.

4.2.1 Error Conditions

If an error condition is detected, the error state is indicated using [ERROR_STS](#). A more specific indication of the error is provided using the following fields.

- [TEMP_ERROR_STS](#)—Indicates an overtemperature error. In this event, an automatic reset shuts down all functions. The host must set [TEMP_ERROR_CLR](#) to return to the Idle State (provided the error has cleared). After returning to the Idle State, the host should then clear [TEMP_ERROR_CLR](#).
If [TEMP_ERROR_RST_MASK](#) is set, there is no reset following a temperature error; instead, there is a controlled shutdown of the analog path. The host must set [TEMP_ERROR_CLR](#) to return to the Idle State (provided the error has cleared). The host must also clear [ACTIVE_EN](#) and [READY_EN](#). After returning to the Idle State, the host should then clear [TEMP_ERROR_CLR](#).
- [ACTIVE_ERROR_STS](#)—Indicates an error in the Active or Ready state. The errors include clocking, AVDD absent, LDO error, LED driver errors, and data-output FIFO errors. The host must clear [ACTIVE_EN](#) and [READY_EN](#) to return to the Idle State (provided the error has cleared).
- [STARTUP_ERROR_STS](#)—Indicates a start-up error. This error can only be cleared by resetting the device.
- [BOOT_ERROR_STS](#)—Indicates a boot error. This error can only be cleared by resetting the device.
- [MCLK_ERROR_STS](#)—Indicates an invalid or absent MCLK in the Idle State. No corrective action is required by the host—the Ready State can be selected as usual, provided a valid MCLK has resumed.
- [PLL_ERROR_STS](#)—Indicates a PLL1 error condition. The host must clear [ACTIVE_EN](#) and [READY_EN](#) to return to the Idle State.

4.3 MCLK Input, PLL and DLL

The CS82L44 provides a flexible clocking architecture, supporting different operating configurations. An external clock reference (MCLK_EXT) is used to generate the required clocks and timing signals. The pixel sample rate is derived from the external reference—either directly, or else using a phase-locked loop (PLL) to synthesize a different frequency.

The CS82L44 incorporates PLL and DLL components as follows:

- DLL1 generates pixel-rate clock signals to control the video-input sampling and to generate external clocks
- PLL1 provides clock-frequency synthesis, enabling the pixel sample rate to be configured at a different frequency to the MCLK reference.
- PLL2 is used to control the data-output timing. PLL2 supports spread-spectrum modulation, allowing the data outputs to be modulated without affecting the AFE sample-timing signals.

In TG Mode (see [Section 4.6](#)), the clocking architecture is configured in three modes, shown in [Fig. 4-5](#) through [Fig. 4-7](#). In each case, the pixel sample rate is equal to the DLL reference frequency (DLL_REF).

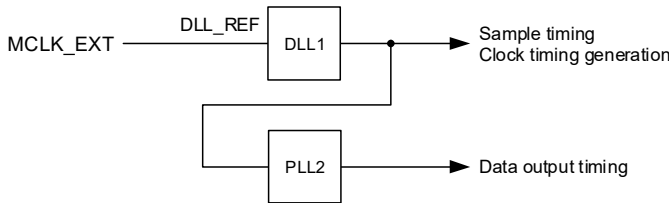


Figure 4-5. Clocking Mode 0

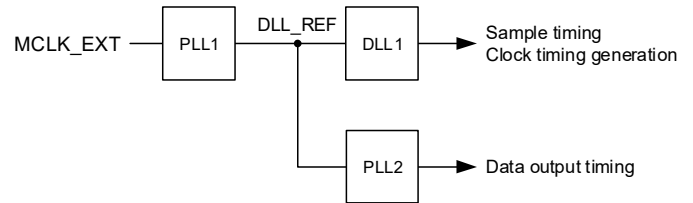


Figure 4-6. Clocking Mode 1

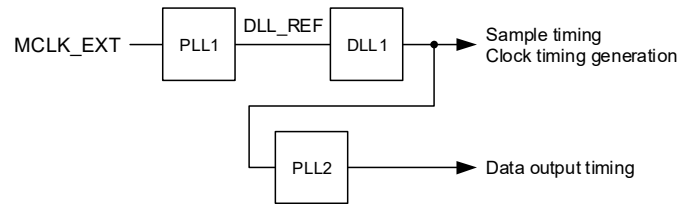


Figure 4-7. Clocking Mode 2

The clocking mode is selected using [CLOCK_CFG_MODE](#). In Clocking Mode 0, the pixel sample rate is equal to the MCLK_EXT frequency. In Clocking Modes 1 and 2, the PLL1 circuit is used to support pixel sample rates that are different to the MCLK_EXT frequency—see [Section 4.3.1](#) to configure PLL1.

The external clock reference (MCLK_EXT) is supported as a single-ended logic level (CMOS) or in differential (LVDS) mode; the applicable configuration is selected using [MCLK_EXT_LVDS](#). In CMOS mode, the clock input is supported on the MCLK_EXT pin. In LVDS mode, the MCLK_EXT_N and MCLK_EXT_P connections are used.

Note: In LVDS mode, the pull resistors on MCLK_EXT_N and MCLK_EXT_P must be disabled using the respective [x_PULL](#) fields. See [Section 4.11.3](#) for further details on configuring the digital I/O pins.

The supported frequency range for MCLK_EXT is described in [Table 3-8](#). If spread-spectrum modulation is present on the external clock reference, the [MCLK_EXT_SS](#) bit must be set.

The [PIXEL_SAMPLE_RATE](#) field must be configured according to the applicable pixel sample rate. The pixel rate is derived from MCLK_EXT—either directly, or else using PLL1 to synthesize a different frequency.

In External Mode (see [Section 4.6](#)), the PLL/DLL functions are not supported. The MCLK frequency is a multiple of the pixel-sample rate, where the applicable frequency ratio is dependent on the selected output data format (see [Section 4.5](#)). The [PIXEL_SAMPLE_RATE](#) field must be configured according to the applicable pixel sample rate.

4.3.1 Phase-Locked Loop (PLL1) Configuration

In Clocking Modes 1 and 2, PLL1 can be used to provide clock-frequency synthesis.

If the pixel sample rate is equal to the MCLK reference frequency, the PLL1 frequency ratios and related parameters are configured automatically by setting [PLL1_AUTO](#). If the required pixel sample rate differs from the MCLK reference frequency, the PLL is configured as described in [Section 4.3.1.1](#).

4.3.1.1 PLL1 Frequency Conversion

PLL1 can be used to synthesize the clocking signals required to support pixel sample rates that are different to the MCLK reference frequency.

A script to calculate the PLL register configuration is provided within the SoundClear™ Studio (SCS) CS82L44 device package. Note that the configuration is dependent on the frequency ratio and on the selected data-output format.

The PLL is configured using the following control fields:

- [PLL1_OUTPUT1_DIV](#)—selects the divider ratio for the ADC clock output
- [PLL1_VCO_RANGE](#)—configures the VCO frequency range
- [PLL1_OUTPUT2_EN](#)—enables the secondary clock output
- [PLL1_OUTPUT2_DIV](#)—selects the divider ratio for the data-output clock
- [PLL1_REFCLK_DIV_BYPASS](#)—disables the divider on the reference input
- [PLL1_REFCLK_DIV_RATIO](#)—selects the divider ratio for the reference input
- [PLL1_RATIO](#)—selects the VCO frequency ratio to the reference input
- [PLL1_MODE](#)—configures the PLL in fractional or integer mode
- [PLL1_PHASE_DET_PAUSE_EN](#)—pauses the phase detection when a phase change occurs in the reference
- [PLL1_CP_IBIAS](#)—configures the loop current bias
- [PLL1_VCO_GAIN](#)—configures the VCO gain
- [PLL1_FILT](#)—configures the PLL filter

4.3.2 Phase-Locked Loop (PLL2) Configuration

PLL2 is used to control the data-output timing in LVDS data-output formats. The spread-spectrum modulation allows the data outputs to be modulated without affecting the AFE sample-timing signals. Note that the spread-spectrum (SS) function is supported for LVDS data-output formats only.

The PLL2 frequency ratios and related parameters are configured automatically by setting [PLL2_AUTO](#). This bit should be set in all use cases.

Spread-spectrum (SS) modulation is enabled on the PLL2 output by setting [PLL2_SS_EN](#).

If SS modulation is enabled, the [PLL2_SS_REF_FREQ](#) field must be configured according to the PLL reference (i.e., MCLK) frequency. The automatic option for this field is recommended in all use cases.

The frequency of the SS modulation is configured using [PLL2_SS_FREQ](#). This controls the rate at which the data-output frequency is modulated.

The magnitude of the SS modulation is configured using [PLL2_SS_MAG](#). This controls the maximum deviation from the nominal data-output frequency.

The supported configurations for spread-spectrum modulation are dependent on the selected data-output format and on the pixel sample rate, as shown in [Table 4-1](#). See [Section 4.5](#) for details of the data-output formats.

Table 4-1. Spread Spectrum Configuration

Data Output Format	Pixel Sample Frequency (MHz)	Spread Spectrum Frequency (kHz)	Spread Spectrum Magnitude (max)
Group 1	2–24	12.5–37.5	2.0 %
Group 2	2–18	12.5–37.5	2.0 %
	18–24	12.5	1.5 %
		18.75–37.5	2.0 %
Group 3	2–12	12.5–37.5	2.0 %
	12–18	12.5	1.5 %
		18.75–37.5	2.0 %
		12.5	1.0 %
	18–24	18.75	1.5 %
		25.0–37.5	2.0 %
Group 4	2–6	12.5–37.5 kHz	2.0 %
	6–12	12.5 kHz	1.5 %
		18.75–37.5 kHz	2.0 %
	12–18	12.5 kHz	1.0 %
		18.75 kHz	1.5 %
		25.0–37.5 kHz	2.0 %
	18–24	—	—

The data-output formats are categorized in four groups. See [Table 4-3](#) for a definition of the respective Format IDs

- Group 1 = Format ID 29
- Group 2 = Format ID 25, 30, 31, 33, 37, 41
- Group 3 = Format ID 26, 34, 38, 42
- Group 4 = Format ID 35, 27, 39, 43

If SS modulation is enabled, the sample-data FIFO buffer must be regularly flushed and reset to ensure timing differences do not result in underflow/overflow errors.

If [FIFO_RESET_CTRL](#) is set, the FIFO is flushed and reset at the start of the initial sequence state (see [Section 4.7](#) for details of the sequence states). The FIFO is flushed by suspending the data written to the FIFO input, while the existing data continues to be read until the FIFO is empty.

The duration of the blank period (when data is not written to the FIFO) is configured using [FIFO_BLANK_DUR](#). The default setting ensures the FIFO is always flushed, but this can be optimized if necessary. After the blank period, new sample data is written to the FIFO; data output restarts when the FIFO is 50 % full.

When the FIFO is flushed, new sample data is not available for a period of $(9 + n)$ pixels, where n is the duration configured by [FIFO_BLANK_DUR](#). To avoid data loss, it must be ensured that this period is less than the sensor dummy-pixel period (during which no valid sensor data is available).

The duration of the blank period can be reduced in order to meet the above requirement; the minimum recommended value varies with data-output format as shown in [Table 4-2](#).

Table 4-2. Spread Spectrum Configuration

Data Output Format 1	Minimum Blank Period (FIFO_BLANK_DUR)
Group 1	0x18 (48 pixels)
Group 2	0x0C (24 pixels)
Group 3	0x08 (16 pixels)
Group 4	0x06 (12 pixels)

1. See [Table 4-1](#) for data-output format groups

If the minimum recommended value is not low enough to avoid data loss, the timing can be reduced further by clearing `FIFO_RESET_DLY`—if this bit is 0, the flushing of the FIFO results in sample data being unavailable for a period of $(2 + n)$ pixels, where n is the duration configured by `FIFO_BLANK_DUR`.

4.3.3 MCLK Masking

The CS82L44 provides configurable masking of the MCLK input. This can be used to prevent erroneous behavior in applications where glitches occur on the MCLK signal at certain periods during the scan pattern. The MCLK mask is triggered using an external control signal to indicate times at which the MCLK input may be corrupt.

Note: MCLK masking is valid in External Mode only (see [Section 4.6](#)).

The MCLK mask is enabled using `MCLK_MASK_EN`. The external signal used to trigger the mask is selected using `MCLK_MASK_SRC`. The active edge of the trigger signal is configured using `MCLK_MASK_POL`.

The mask trigger can be associated with the `LEDR_EN`, `LEDG_EN`, `LEDB_EN`, `TGSYNC1`, `TGSYNC2`, `LED_START`, or `GPIO4` signals. These signals are supported on multifunction pins, which must be configured for the required functions as described in [Section 4.11](#).

Notes: The mask trigger can be configured as the logical AND of the LED-enable signals (`LEDx_EN`). This option can be selected using `MCLK_MASK_SRC`.

If `GPIO4` is used to trigger the MCLK mask, the pin must be configured for input as described in [Section 4.11.3](#).

The MCLK input is masked if a valid edge is detected on the selected trigger signal. The `MCLK_MASK_DLY` field selects the time between the trigger condition and the start of the mask period. The duration of the mask period is configured using `MCLK_MASK_DUR`. A configurable clock period, derived from MCLK, is used to define the mask delay and mask duration; the clock period is configured using `MCLK_MASK_CLK_DIV`.

Data output is invalid while the MCLK mask is applied. To ensure the data output is correctly reset following the MCLK mask period, the `MCLK_MASK_OPF_RST` bit must be set.

The MCLK masking is illustrated in [Fig. 4-8](#).

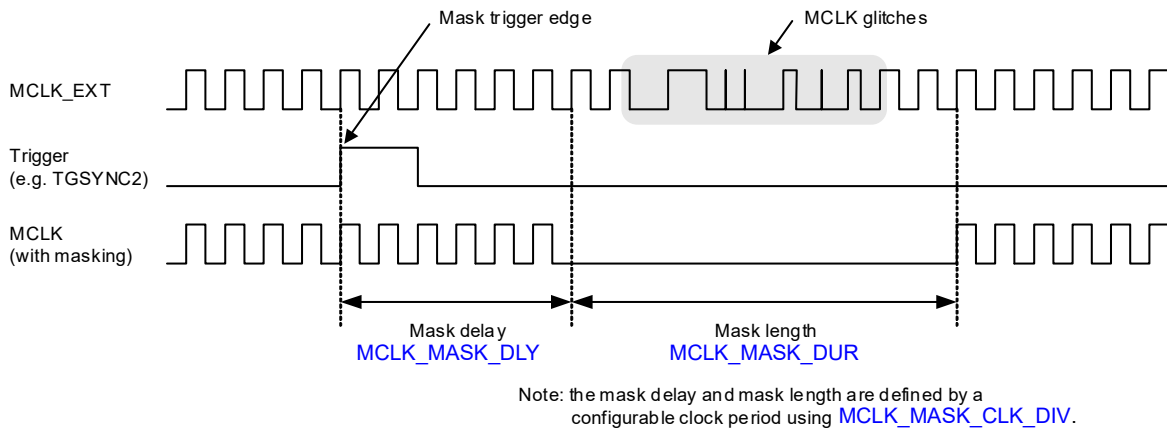


Figure 4-8. MCLK Masking

4.4 Analog Input Path

The analog input path supports video input from an external sensor. The input path can be optimized to support a wide range of CIS and CCD sensors. A voltage reference (`VBIAS`) for the sensor can be generated internally on the CS82L44, or else can be provided from an external source.

The CS82L44 supports CDS and non-CDS sampling modes. For non-CDS operation, the video signal is sampled once per pixel. For CDS processing, two samples per pixel are used (reset level and video level); the correlated processing of these samples enables common-mode noise to be suppressed.

The clamp circuit allows the device to support video signals that exceed the maximum DC input voltage, and to align the video input to the VBIAS reference. Clamping can be applied during the reset portion of active scan pixels (pixel clamping) or else during black pixels outside the active scan periods (line clamping).

The input path can be optimized for different sensors using configurable offset, gain, and signal inversion. Separate controls are provided for each input channel. Different parameter values can also be set for different sequence states, allowing cyclic configuration for different phases of the scan pattern. Automatic black-level calibration (BLC) is supported.

An integrated test-pattern generator is available to assist with device set-up, with no input signal required.

An overview of the analog input path is shown in Fig. 4-9.

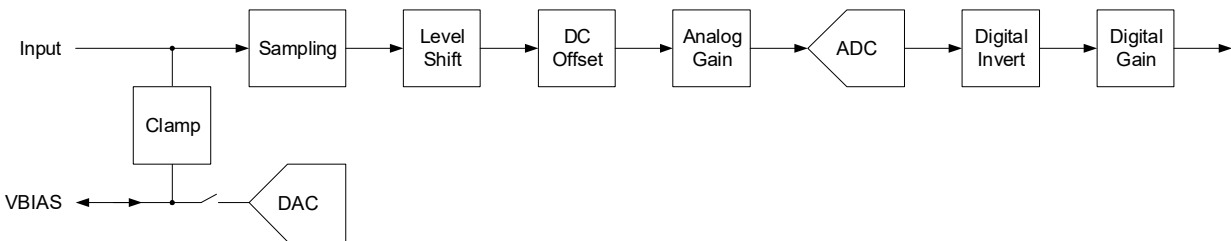


Figure 4-9. Analog Input Path

An example calculation to determine the digital output code for a given analog input voltage is described in Section 5.2.

4.4.1 Input Sampling Mode

The CS82L44 supports a wide range of video input signals. Typical CIS and CCD sensor waveforms are shown in Fig. 4-10.

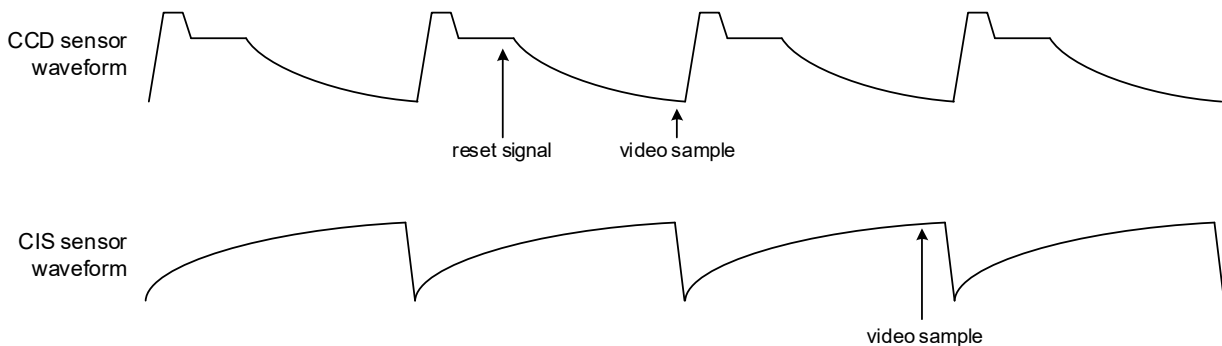


Figure 4-10. Typical CIS/CCD Waveforms

The analog input path can be configured in CDS or non-CDS sampling modes as follows:

- In CDS mode (`CDS_EN = 1`), the reset level and the video level are sampled for each pixel. This is typically used with CCD sensors, where the video waveform includes a reset level for each pixel. In CDS sampling mode, each video sample is measured relative to the reset level in the same pixel frame.
- In non-CDS mode (`CDS_EN = 0`), a single video-level sample is used for each pixel. This is typically used with CIS sensors, where the video waveform does not provide a reset level for each pixel. In this case, the video sample is measured relative to the VBIAS reference (see Section 4.4.2).

Note that both sampling modes (CDS or non-CDS) may be used with either type of sensor (CIS or CCD). The suitability of either sampling mode must be determined by the specific waveforms and timing constraints of the target application.

The analog input path can be configured for low-power operation, enabling power savings under suitable operating conditions. The default, high-performance configuration is recommended for pixel sample rates of 10 MHz and above. For slower sample rates, power consumption can be optimized using `CHx_AFE_POWER`.

4.4.2 Bias Voltage (VBIAS)

The CS82L44 provides a configurable voltage reference on the VBIAS pin; this is used as an input to the external sensor and as a reference for the analog input path. The VBIAS reference is required during active sampling. In non-CDS sampling mode, the bias voltage provides the reference level for the input-signal measurement. When the input clamp is active (see [Section 4.4.3](#)), the video input is clamped to the VBIAS reference.

The VBIAS reference is configured using the reset-level clamp (RLC) DAC. The bias is enabled using `VBIAS_EN`; the output voltage is configured using `VBIAS_LVL`.

The bias voltage should be configured within the operating conditions of the sensor. If input clamping is enabled, the bias should be set at the desired reset level, ensuring that both the reset level and the full-scale level are within the measurement range of the CS82L44 (see [Section 4.4.3](#) for further details).

The drive strength of the bias is configurable using `VBIAS_ISEL` and `VBIAS_ISEL_BOOST`. The internal source for the bias reference is selected using `VBIAS_REF`; the VREF source is recommended in all cases.

Note: The bias voltage can also be provided externally. The RLC DAC must be disabled if an external reference source is connected to the VBIAS pin.

4.4.3 Clamp Control

The clamp provides a short circuit between the input signal and the VBIAS reference. The clamp is used with AC-coupled inputs to align the video signal within the measurable range of the CS82L44. The clamp enables video signals that exceed the full-scale input level to be accommodated; it can also be used to protect the input circuits from transient voltages that may arise during sensor start-up.

The full-scale input voltage is defined in [Table 3-3](#). If the input signal (at the reset- or video-sample points) exceeds the full-scale level, the clamp must be used to offset the signal level within the permitted limit.

Note: The output from a CCD sensor typically includes transients that do not represent either the reset level or the video sample level; these transients do not need to lie within the measurable range. However, the absolute maximum rating of the input pins (see [Table 3-2](#)) must be observed at all times.

If the clamp is used, the inputs must be AC-coupled using a capacitor on the input pins as shown in [Section 2](#). If the clamp is not used, the DC-coupled configuration is recommended (i.e., without a capacitor).

The clamp operation must be timed to coincide with the input reset signal, in order to align the reset (black) level with the VBIAS reference. To ensure correct behavior, the input voltage must be a constant level while the clamp is active.

- In CDS mode, the clamp can be applied during the reset portion of active scan pixels (pixel clamping).
- In non-CDS mode, the clamp is typically used during black pixels outside the active scan periods (line clamping).

The clamp circuit is illustrated in Fig. 4-11. The clamp is used with the VBIAS reference to adjust the video signal level within the operating limits of the CS82L44.

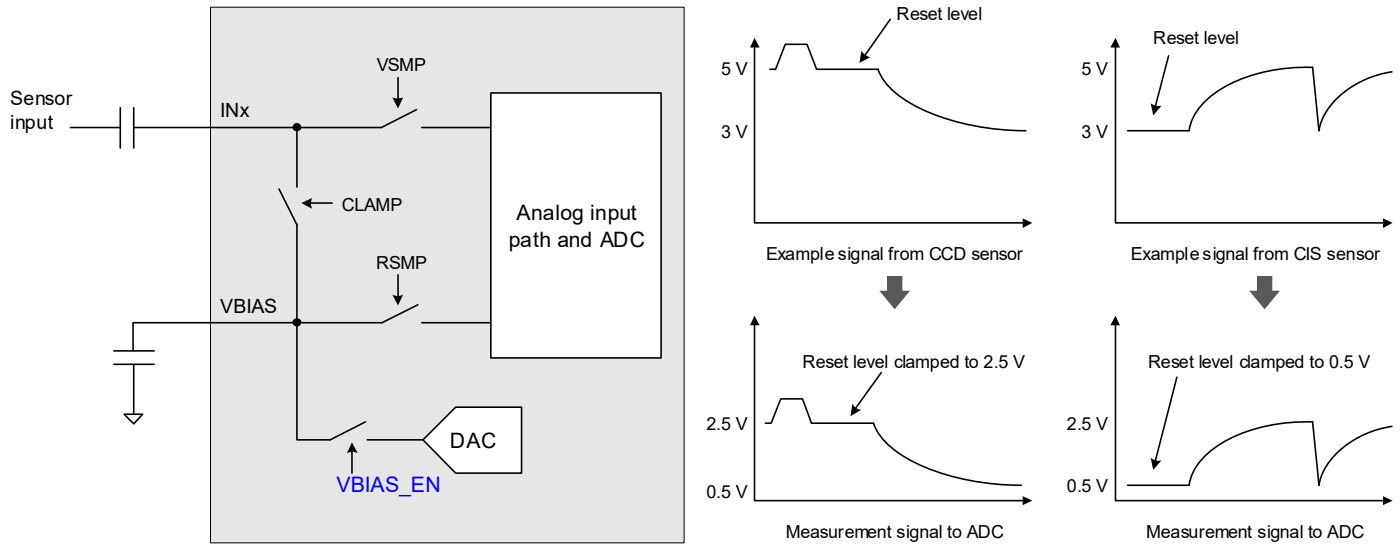


Figure 4-11. Input Clamp

The clamp function is enabled by setting [CLAMP_EN](#). The [CLAMP_MODE](#) field is used to select when clamping is applied.

- If [CLAMP_MODE](#) = 00, clamping is enabled for all pixels.
- If [CLAMP_MODE](#) = 01, clamping is enabled across a defined range of pixel-counter values (valid in TG Mode only). In this mode, the pixel range is configured using [CLAMP_START](#) and [CLAMP_END](#). The range is referenced to the primary or secondary pixel counter using [CLAMP_CNT_SEL](#).
If the range is referenced to the secondary pixel counter, the clamp operation can be selectively enabled for individual sequence states using [CLAMP_SEQ_SEL](#). Each bit within these fields enables the clamp in the corresponding state (see [Section 4.7.1](#) for details of the sequence state).
- If [CLAMP_MODE](#) = 10, clamping is enabled if [RSMP_EXT](#) is asserted (Logic 1). The [RSMP_EXT](#) function is supported on a multifunction pin, which must be configured for the required functions as described in [Section 4.11](#).
Note this option is not valid if CDS sampling is enabled in External Mode 1 (see [Section 4.6](#)).

During pixels where clamping is enabled (and the applicable [CLAMP_MODE](#) condition is met), the clamp is applied for a portion of the respective pixel frames. In CDS mode, the clamp is applied while [RSMP](#) is asserted; in non-CDS mode, the clamp is applied while [VSMP](#) is not asserted. See [Section 4.6](#) for further details of the [VSMP](#) and [RSMP](#) signals.

The clamp timing in CDS mode is illustrated in Fig. 4-12.

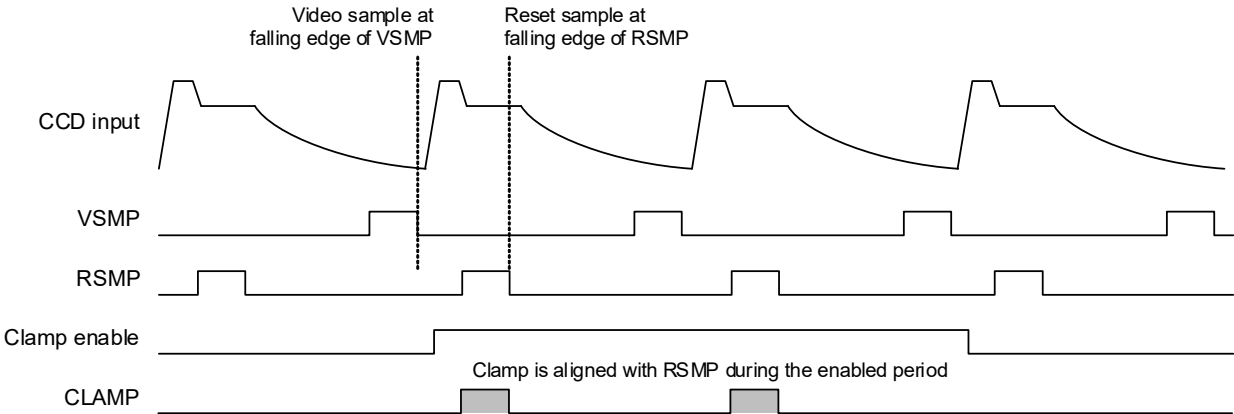


Figure 4-12. Clamp Timing (CDS Mode)

The clamp timing in non-CDS mode is illustrated in Fig. 4-13.

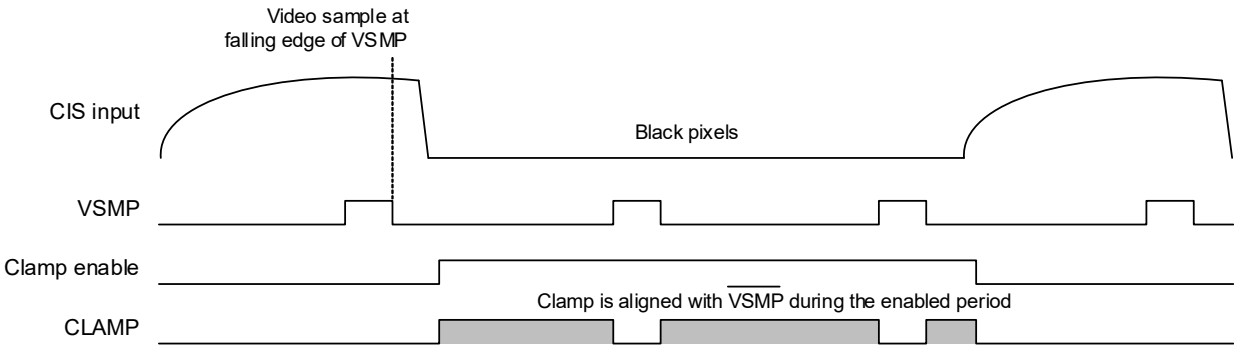


Figure 4-13. Clamp Timing (Non-CDS Mode)

The clamp can also be enabled using `CHx_CLAMP_OVRD` (where x is 1–4 for the respective input channel). If these bits are set, the respective clamp is enabled continuously until the bit is cleared. This can be used to protect the input circuits from transient voltages that may arise during sensor start-up.

4.4.4 Polarity Select

The analog input path provides selectable polarity control for each input channel; this can be used to accommodate different types of sensor waveform. The polarity of the sensor waveforms are defined as follows:

- For a CCD-type waveform, the reset level is higher than the video sample level; this is inverted polarity.
- For a CIS-type waveform, the reset level is lower than the video sample level; this is non-inverted polarity.

The full-scale signal level for the input path is 2.4 V pk-pk (see Table 3-3). The input signal is measured relative to the VBIAS/reset level, as described in Section 4.4.1.

The analog input path must be configured for the polarity of the input waveform. If inverted polarity is selected, the waveform is level-shifted so the reset-level signal is measured around 2.4 V. If non-inverted polarity is selected, there is no level shift, and the reset-level is measured around 0 V.

Note: The level shift can be combined with additional DC offset as described in Section 4.4.5.

The polarity selection is illustrated in Fig. 4-14 for typical CCD and CIS sensor waveforms. The inverted CCD waveform is level-shifted to the 2.4 V level. The non-inverted CIS waveform is unaffected.

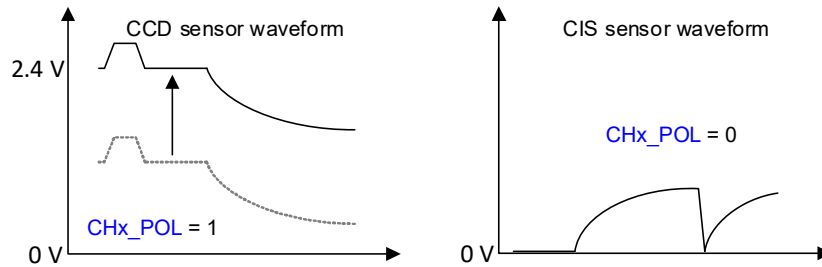


Figure 4-14. Polarity Select

The polarity is configured independently for each input channel using `CHx_POL` in the respective register block. Note this bit is defined in each of the ADC register blocks 1–4, and must be configured in each block for the respective input channel.

4.4.5 Offset Control

The offset provides DC adjustment to the analog input signal. The offset can be either positive or negative, and can be used to optimize the input path for the video signal.

The offset is illustrated in Fig. 4-15 for typical CCD and CIS sensor waveforms.

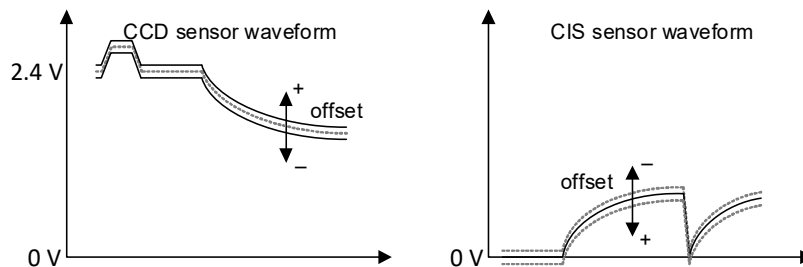


Figure 4-15. Offset Control

The offset can be set in the range -333 mV to $+333$ mV. The offset is applied differently depending on whether the signal path is inverted (see Section 4.4.4):

- If the signal path is inverted (`CHx_POL = 1`), the offset is added to signal voltage—a positive offset increases the output voltage, and a negative offset decreases the output voltage.
- If the signal path is not inverted (`CHx_POL = 0`), the offset is subtracted from the signal voltage—a positive offset decreases the output voltage, and a negative offset increases the output voltage.

The offset can be configured independently for each input channel. The offset is associated with the sequence state, allowing different offsets to be applied automatically according to the current state (see Section 4.7.1 for details of the sequence state).

The offset associated with each sequence state is configured using `CHx_SEQn_OFFSET` (where n is 0–3 for the respective sequence state, and x is 1–4 for the respective input channel).

The auto-cycle function is enabled using `ACYC_EN`. If auto-cycle is enabled, the offset for each channel is determined by the current sequence state. If auto-cycle is disabled, the offset configured State 0 is used.

Note: Auto-cycle is supported in TG Mode only (see Section 4.6). In External Mode, auto-cycle must be disabled.

If auto-cycle is enabled, a different offset is applied for each sequence state. The offset for each sequence state can be applied directly following the respective state transition. Alternatively, the respective offset settings can be controlled by one of the pulse-output sources, PO0–PO10; this can be used to control the timing independently for each sequence state. See [Section 4.8.2](#) for details of the pulse-output sources.

The auto-cycle timing mode is selected using [ACYC_MODE](#). This bit selects one of two behaviors:

- If fixed timing is selected, the offset for each sequence state is applied following a fixed delay after the respective state transition. The delay is configured using [ACYC_DELAY](#).
- If PO timing is selected, the offset for each sequence state is controlled by one of the pulse-waveform sources, PO0–PO10. The applicable pulse source is selected using [ACYC_PO_SEL](#). The active edge is selected using [ACYC_PO_POL](#). The offset associated with the current sequence state is applied on the first active edge of the pulse waveform that occurs during the sequence state.

The black-level calibration (BLC) function can also be used to configure the offset automatically—see [Section 4.4.10](#).

Note: If BLC is enabled, the auto-cycle function must be configured for the minimum timing delay. If BLC is enabled, set [ACYC_MODE](#) = 0 and [ACYC_DELAY](#) = 0x00.

4.4.6 Analog Gain Control

The analog gain provides control of the input signal amplitude. The analog gain can be used to optimize the input signal to match the measurable range of the ADC.

The analog gain is illustrated in [Fig. 4-16](#) for typical CCD and CIS sensor waveforms.

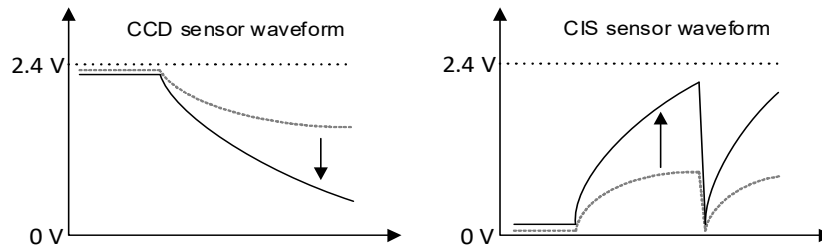


Figure 4-16. Analog Gain

The analog gain can be configured independently for each input channel. The gain is associated with the sequence state, allowing different gain settings to be applied automatically according to the current state.

The analog gain associated with each sequence state is configured using [CHx_SEQn_AGAIN](#) (where n is 0–3 for the respective sequence state, and x is 1–4 for the respective input channel).

The auto-cycle function is enabled using [ACYC_EN](#). If auto-cycle is enabled, the gain for each channel is determined by the current sequence state. If auto-cycle is disabled, the gain configured State 0 is used.

Note: Auto-cycle is supported in TG Mode only (see [Section 4.6](#)). In External Mode, auto-cycle must be disabled.

If auto-cycle is enabled, a different gain setting is applied for each sequence state. The gain settings are applied at the same time as the respective offset, as described in [Section 4.4.5](#).

4.4.7 Analog to Digital Converter (ADC)

A high-performance analog-to-digital converter (ADC) is provided for each input channel. The ADC is configured automatically and does not require any user configuration.

4.4.8 Digital Invert

The input path accommodates sensor waveforms of inverted or non-inverted polarity, as described in [Section 4.4.4](#). The digital invert is used to ensure the ADC output is a standardized polarity for all signal types, i.e., the reset (black) signal level is a lower numerical value than the full-scale (white) signal level.

The digital invert is configured automatically to align with the selected polarity of the analog input.

The digital invert is illustrated in [Fig. 4-17](#) for typical CCD and CIS sensor waveforms. The inverted CCD waveform is adjusted so the reset (black) signal level is towards the zero end of the digital range. The non-inverted CIS waveform is unaffected.

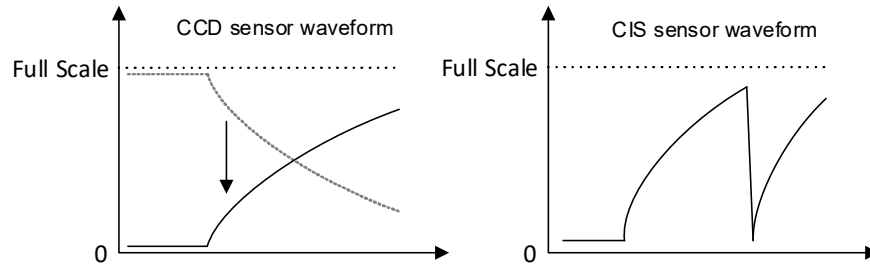


Figure 4-17. Digital Invert

4.4.9 Digital Gain Control

The digital gain provides control of the digital output scaling. In typical applications, the digital gain is configured to set the highest signal level close to the full-scale digital level.

The digital gain is illustrated in [Fig. 4-18](#) for typical CCD and CIS sensor waveforms.

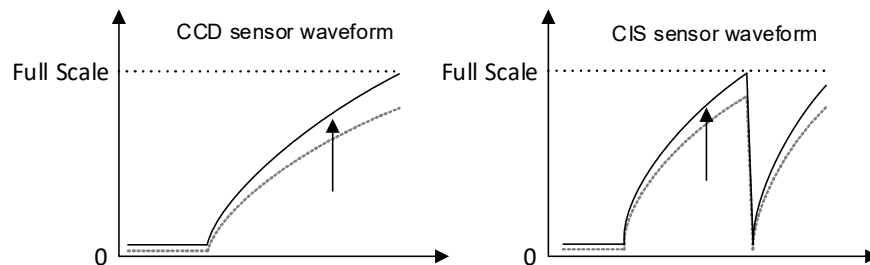


Figure 4-18. Digital Gain

The digital gain can be configured independently for each ADC channel. The gain is associated with the sequence state, allowing different gain settings to be applied automatically according to the current state.

The digital gain associated with each sequence state is configured using [CHx_SEQn_DGAIN](#) (where n is 0–3 for the respective sequence state, and x is 1–4 for the respective ADC channel).

The auto-cycle function is enabled using [ACYC_EN](#). If auto-cycle is enabled, the gain for each channel is determined by the current sequence state. If auto-cycle is disabled, the gain configured for State 0 is used.

Note: Auto-cycle is supported in TG Mode only (see [Section 4.6](#)). In External Mode, auto-cycle must be disabled.

If auto-cycle is enabled, a different gain setting is applied for each sequence state. The digital gain settings are applied at the same time as the respective analog gain, as described in [Section 4.4.6](#).

4.4.10 Black-Level Calibration (BLC)

Black-level calibration (BLC) can be used to automatically configure the DC offset in the input signal path. The signal level is monitored at the digital output, and used to adjust the required DC offset. The calibration process uses the black pixels at the start of a scan line to determine the required offset to achieve a specified target level.

Note: BLC is supported in TG Mode only (see [Section 4.6](#)). In External Mode, BLC must be disabled.

BLC comprises coarse adjustment and fine adjustment, which can be scheduled in different ways to suit the application. In a typical application, coarse adjustment is performed infrequently (e.g., once per page); fine adjustment can be performed on every line, or else just once per page following the coarse adjustment.

The BLC function is disabled if coarse adjustment is disabled ([BLC_COARSE_CYCLES](#) = 0x0) and fine adjustment is disabled ([BLC_FINE_EN](#) = 0).

BLC is configured by defining which pixels (at the start of a scan line) are used for calibration. The pixel-count value of the first pixel to be used is configured using [BLC_START](#). The total number of pixels available for calibration is configured using [BLC_LENGTH](#), valid from 18–1023

Note: The scan pattern comprises one or more sequence states (maximum four), as described in [Section 4.7](#). If multiple states are used, the same range of pixels is used for BLC in each state.

The first pixel for BLC is referenced to the primary or secondary pixel counter using [BLC_CNT_SEL](#). If the pixel is referenced to the secondary pixel counter, the BLC function can be selectively enabled for individual sequence states using [BLC_SEQ_SEL](#)—each bit within this field enables BLC in the corresponding state. See [Section 4.7](#) for further details of the pixel counters and sequence states.

Coarse adjustment is performed at the start of a frame (e.g., at the start of a page). The controller device signals the start of a frame by setting [BLC_FRAME_START](#). If this bit is set, the start of frame occurs on the next state transition to the initial state (typically State 0). The [BLC_FRAME_START](#) bit is cleared automatically after BLC is scheduled.

The number of iterations of coarse adjustment is configured using [BLC_COARSE_CYCLES](#). Each iteration requires a duration of 12 pixels; the total number of pixels used for coarse adjustment must be less than the total number of pixels available for calibration.

Notes: If the desired number of coarse-adjustment iterations is constrained by the total number of pixels available for calibration, the analog gain (see [Section 4.4.6](#)) should be reduced to improve the BLC performance.

If BLC is used, the number of coarse-adjustment iterations must be ≥ 1 .

Fine adjustment is enabled using [BLC_FINE_EN](#). If enabled, fine adjustment is performed at the start of a frame, immediately following the coarse adjustment. Fine adjustment can be enabled on every scan line using [BLC_FINE_EVERYLINE](#).

If fine adjustment is enabled on every line, the offset calculation can be accumulated from one line to the next, or can be recalculated (from the coarse adjustment result) at the start of each line. The [BLC_FINE_ACCUM](#) bit is used to select the accumulating option.

The fine adjustment incorporates a configurable filter to accommodate different input-signal behavior. The filter balances DC-tracking performance against noise suppression. By default, the filter is optimized for noise suppression. If there is significant DC drift during the fine-adjustment process, the filter can be adjusted to improve the DC tracking. The filter is configured using [BLC_TRACKING](#).

The target level for BLC in each sequence state is configured using [CHx_SEQn_BLC_TARGET](#) (where n is 0–3 for the respective sequence state, and x is 1–4 for the respective ADC channel). The selectable range of the BLC target level can be extended using [BLC_TARGET_RANGE](#). If this bit is set, the effective level is multiplied by four.

The target level can be configured within a limited range of the supported digital-output codes, dependent on the output format. If [BLC_TARGET_RANGE](#) = 0, the following ranges are supported:

- In 16-bit output format, the target level represents bits [11:4] of the output code. Range 0–4080, step size 16.
- In 12-bit output format, the target level represents bits [7:0] of the output code. Range 0–255, step size 1.
- In 10-bit output format, bits [7:2] of the target level represent bits [5:0] of the output code. Range 0–63, step size 1.

If `BLC_TARGET_RANGE = 1`, the following ranges are supported:

- In 16-bit output format, the target level represents bits [13:6] of the output code. Range 0–16320, step size 64.
- In 12-bit output format, the target level represents bits [9:2] of the output code. Range 0–1020, step size 4.
- In 10-bit output format, the target level represent bits [7:0] of the output code. Range 0–255, step size 1.

The offset applied by the BLC function is indicated using `CHx_BLC_OFFSET` for the respective ADC channel.

Examples of the BLC configuration are shown in [Fig. 4-19](#) through [Fig. 4-21](#).

In the example shown in [Fig. 4-19](#), fine adjustment is enabled for every line, with the calibration recalculated for each line. This configuration is suitable if there is large DC drift during a frame.

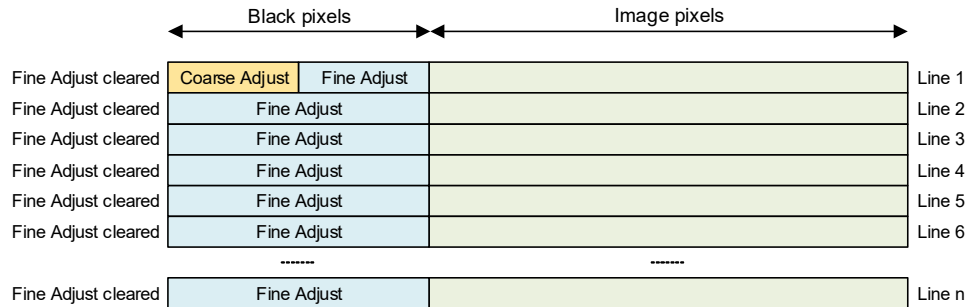


Figure 4-19. Black Level Calibration—Example 1

In the example shown in [Fig. 4-20](#), fine adjustment is enabled for first line only. This configuration is suitable for adjusting DC drift on a frame-by-frame basis.

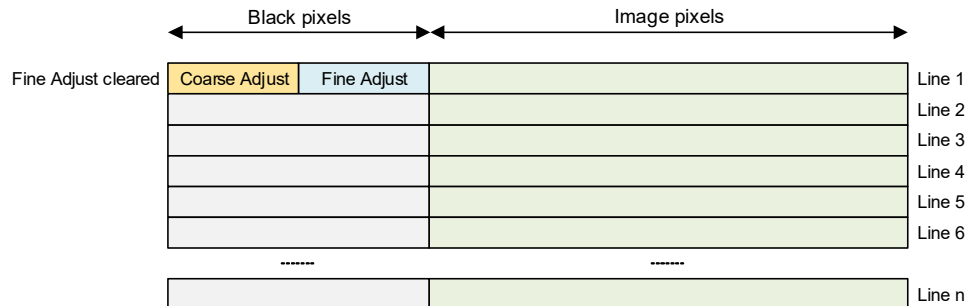


Figure 4-20. Black Level Calibration—Example 2

In the example shown in [Fig. 4-21](#), fine adjustment is enabled for every line, with the calibration accumulated from one line to the next. This configuration minimizes the line-by-line variation, but does not suppress DC drift to the same extent as Example 1.

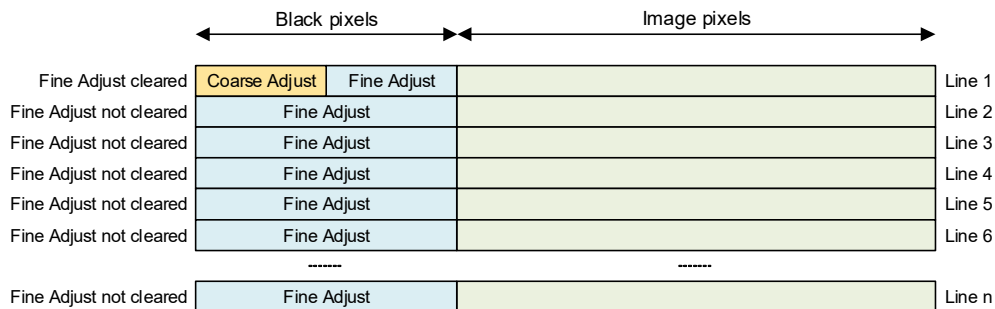


Figure 4-21. Black Level Calibration—Example 3

4.4.11 Pattern Generator

The CS82L44 incorporates a pattern generator, which can be used for set-up and debug purposes. The pattern generator allows the digital output format to be verified without any analog input required. The pattern generator is configurable to support different test patterns on the digital output.

If the pattern generator is enabled, the analog input path is bypassed. Note that other required functions must be configured as for normal operation:

- External clock reference, and PLL1 if required ([Section 4.3](#))
- Digital output in LVDS or CMOS (TG) format ([Section 4.5](#))
- Sample timing control in TG Mode, with valid VSMP, RSMP, AFECK timing ([Section 4.6.1](#))
- TG Sync (master or slave) and pixel counter configuration ([Section 4.7](#))

The latency of the data output is defined in [Section 4.6.1](#). Note that the latency when using the pattern generator differs from the latency in normal operation.

To ensure correct display of the test pattern, the pattern generator must be configured according to how the timing signals are used in the application. See [Section 4.7](#) for details of the sequence states and pixel counters.

- If the scan line corresponds to the primary-counter period (i.e., new line on each cycle of the sequence states), [PGEN_CNT_SEL](#) should be cleared.
- If the scan line corresponds to the secondary-counter period (i.e., new line for each sequence-state transition), [PGEN_CNT_SEL](#) should be set.

The pattern generator is enabled using [PGEN_EN](#). The pattern should be configured, and [PGEN_EN](#) set, while in the Idle State. After transitioning to the Active State, the configured pattern is output following the first TG Sync pulse. To reconfigure the pattern generator, the [PGEN_EN](#) bit must be cleared; this can be done while remaining in the Active State.

Note: After clearing [PGEN_EN](#) in the Active State, the host system must wait until after the next TG Sync pulse before reconfiguring the pattern.

Four different test patterns can be selected using [PGEN_PATT_SEL](#). If [PGEN_MARCH](#) is set, the selection is overridden and the marching pattern is implemented.

The dimensions of the selected pattern are configured using [PGEN_WIDTH1](#) and [PGEN_WIDTH2](#). The intensity of the selected pattern is configured using [PGEN_LVL](#). The pattern intensity can be inverted using [PGEN_INV](#).

Further details of each pattern are provided in [Section 4.4.11.1](#) through [Section 4.4.11.5](#).

4.4.11.1 Constant

If the constant pattern is selected, the intensity is configured using [PGEN_LVL](#). The intensity is the same level for all pixels.

If [PGEN_INV](#) is set, the patch intensity is inverted.

4.4.11.2 Vertical Ramp

The vertical ramp pattern comprises a number of horizontal bands; by default, the intensity increases for each band, as illustrated in Fig. 4-22.

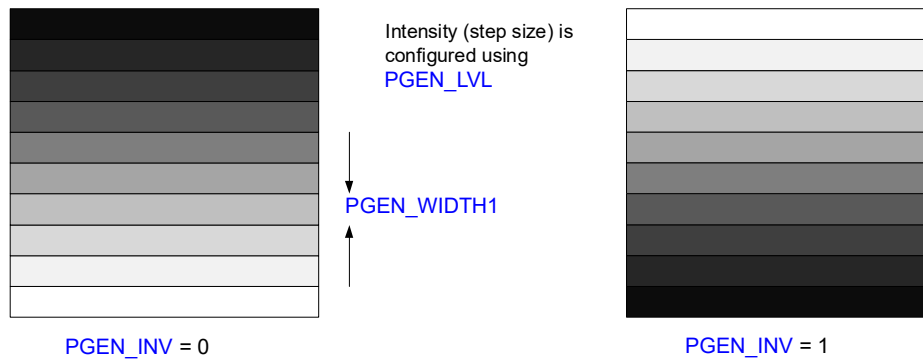


Figure 4-22. Vertical Ramp

The size of the horizontal bands is configured using `PGEN_WIDTH1` to select the number of lines in each band (i.e., number of TG Sync pulses).

The intensity of the first band is `0x0000`. For each subsequent band, the intensity increases by `PGEN_LVL`. If the intensity reaches the maximum value (`0xFFFF`), it returns to `0x0000` and continues to increase from there for each band.

If `PGEN_INV` is set, the intensity of the first band is `0xFFFF` and decreases for each subsequent band, with the step size determined by `PGEN_LVL`.

4.4.11.3 Horizontal Ramp

The horizontal ramp pattern comprises a number of vertical bands; by default, the intensity increases for each band, as illustrated in Fig. 4-23.

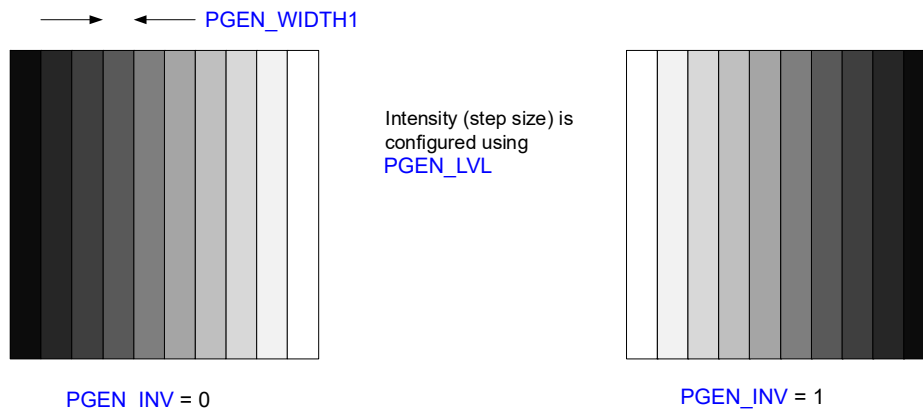


Figure 4-23. Horizontal Ramp

The size of the horizontal bands is configured using `PGEN_WIDTH1` to select the number of pixels in each band.

The intensity of the first band is configured using `PGEN_LVL`. The intensity of each subsequent band increases by the same amount. If the intensity reaches the maximum value (`0xFFFF`), it returns to 0 and continues to increase from there for each band.

If `PGEN_INV` is set, the intensity of the first band is `65535` and decreases for each subsequent band, with the step size determined by `PGEN_LVL`.

4.4.11.4 Patch Pattern

The patch pattern comprises a number of rectangular patches; the intensity is fixed for each patch, as illustrated in Fig. 4-24.

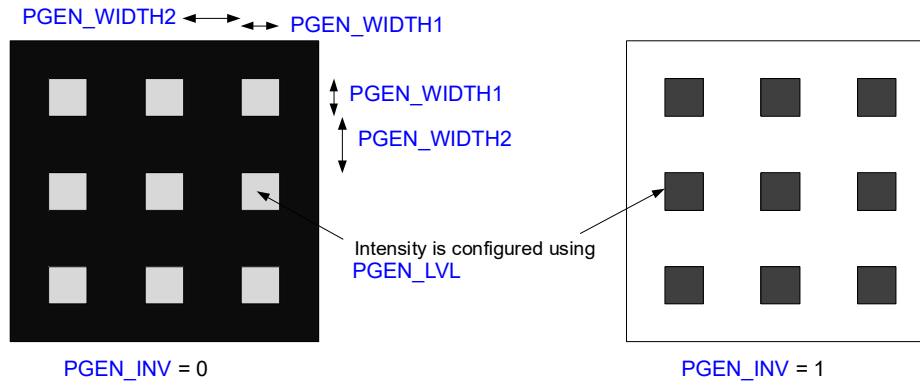


Figure 4-24. Patch Pattern

The size of each patch is configured using **PGEN_WIDTH1** to set the width (number of pixels) and the height (number of lines) of the patch.

The spacing of the patches is configured using **PGEN_WIDTH2** to set the horizontal separation (number of pixels) and the vertical separation (number of lines) between patches.

The intensity of each patch is configured using **PGEN_LVL**. The intensity is 0 for all other areas.

If **PGEN_INV** is set, the patch intensity is inverted; the intensity is 0xFFFF for all other areas.

4.4.11.5 Marching Pattern

The marching pattern comprises horizontal lines; the intensity changes for each line, as illustrated in Fig. 4-25.

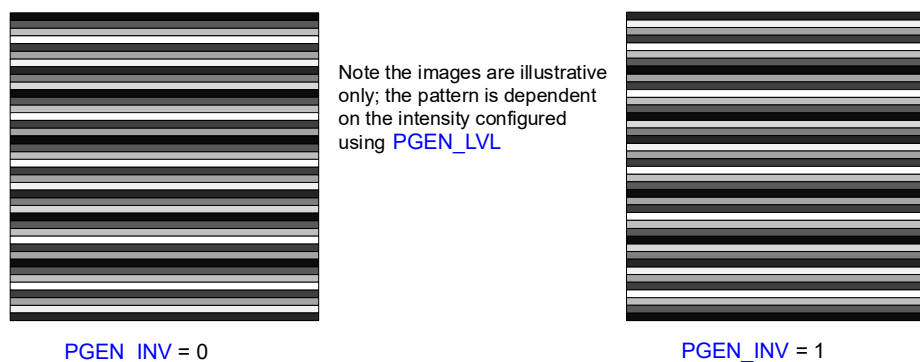


Figure 4-25. Marching Pattern

The intensity of the first line is configured using **PGEN_LVL**. For each subsequent line, the intensity is determined by a bitwise left rotation of the previous value. The pattern repeats every 16 lines.

4.5 Digital Output Format

The data output from the CS82L44 is supported in different formats to suit a range of applications. The available formats allow users to choose between different electrical standards, number of channels, sample resolution, number of data pins, and the ordering of the data bits.

Data output is supported in the following interface types:

- LVDS—Low-voltage Differential Signaling (LVDS) differential clock/data output (maximum 3 data pairs)
- CMOS (TG)—single ended clock/data output (maximum 6 data lines)
- CMOS (External)—data output synchronized to the MCLK input (maximum 8 data lines)

The valid output formats are dependent on sample-timing mode (see [Section 4.6](#)). In TG Mode, the LVDS and CMOS (TG) formats are supported. In External Mode, one of the CMOS (External) formats must be selected.

The output format is selected using [FORMAT_SEL](#). The selected format is applied by setting [FORMAT_LOAD](#).

Note: The [FORMAT_LOAD](#) bit is cleared automatically when the selected format is applied; this bit must be set each time a new output format is selected. The host should confirm the CS82L44 is in the Idle State (see [Section 4.2](#)) before changing the output format.

4.5.1 Status Flags

The LVDS and CMOS (TG) data formats incorporate configurable status flags, allowing additional information to be provided with the sample data. The status flags can be used to assist with decoding the output data.

LVDS formats support a maximum of five status flags, S0–S4. (Some LVDS formats support fewer than five flags.) CMOS (TG) formats support a single status flag, S0.

The function of each status flag is selected using [FLAG_Sx_FN](#) (where x is 0–4 for the respective flag). The status flags can be configured to provide the following indications:

- Logic 0, Logic 1—the flag is fixed at the respective logic level.
- Sequence state—two status flags can be used to indicate bits [1:0] of the [SEQ_STATE_STS](#) field. See [Section 4.7](#) for further details of the sequence state.
- Flag Pixel 1—the status flag is set if the pixel counter matches one of four configured values. The associated pixel count values are configured using the respective [FLAG_PIX1_PIXELx](#) fields. The flag is referenced to the primary or secondary pixel counter using [FLAG_PIX1_CNT_SEL](#). See [Section 4.7](#) for further details of the pixel counters.

If the flag is referenced to the secondary pixel counter, it can be selectively enabled for individual sequence states using [FLAG_PIX1_SEQ_SEL](#). Each bit within this field enables the flag pixel in the corresponding state.

The Flag Pixel 1 status is set if the data block contains a sample corresponding to one of the selected pixel-count values.

In some LVDS output formats, a data block may contain data samples relating to two different pixel numbers. The flag-pixel indicator is set for all data blocks containing samples corresponding to one of the selected pixel-count values; this includes any blocks that also contain data samples for the previous/subsequent pixel.

- Flag Pixel 2—the status flag is set if the pixel counter coincides with a transition/edge of one of the pulse-output sources, PO0–PO10. The applicable pulse source is selected using [FLAG_PIX2_PO_SEL](#). The status flag can be configured to indicate rising edges, falling edges, or all edges of the pulse-output source using [FLAG_PIX2_PO_EDGE](#). See [Section 4.8.2](#) for further details of the pulse-output sources.

The Flag Pixel 2 status is set if the data block contains a sample corresponding to a toggle point for the selected pulse-output source, POx. Note there is latency associated with the pulse-output sources. If POx is configured to toggle at Pixel *n*, the toggle—and any associated Flag Pixel 2 indication—occurs at the Pixel *n*+1 sample.

In some LVDS output formats, a data block may contain data samples relating to two different pixel numbers. The flag-pixel indicator is set for all data blocks containing samples corresponding to the applicable pixel-count values; this includes any blocks that also contain data samples for the previous/subsequent pixel.

- Flag DEN 1, Flag DEN 2—the status flag represents one of the pulse-output sources, PO0–PO10. The applicable pulse source is selected using the respective [FLAG_DENx_PO_SEL](#) field. See [Section 4.8.2](#) for further details of the pulse-output sources.

- Channel ID—three status flags can be used to indicate bits [2:0] of the channel number (1–4) for the respective data block.

In LVDS output formats, a data block may contain data samples relating to more than one channel. The first data block indicates Channel 1. The indicated channel for other data blocks is derived from the equivalent bit position in each block as Bit 0 of Channel 1 in the first data block.

4.5.2 LVDS Formats

In LVDS output format, the CS82L44 provides differential clock/data output. The clock is supported on the DCLKOUT_P and DCLKOUT_N pins. The data output is distributed over a maximum of three data pairs, DOUTn_P and DOUTn_N.

Note: If LVDS output format is selected, the pull resistors on DOUTn_P and DOUTn_N must be disabled using the respective `x_PULL` fields. See [Section 4.11.3](#) for further details on configuring the digital I/O pins.

The LVDS output is defined in blocks, each containing seven data bits per output pair. The sample data for each channel is contained in the assigned bit positions. One or more data blocks are used to convey the data for each pixel. The required number of data blocks per pixel depends on the number of channels and the number of data bits per channel.

A single LVDS block (assuming three data pairs) is illustrated in [Fig. 4-26](#). See [Table 3-17](#) for timing specifications.

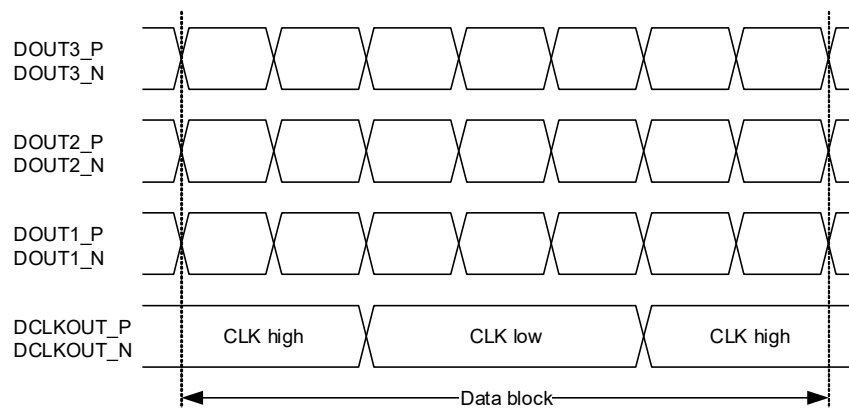


Figure 4-26. LVDS Output Format

The polarity of the differential LVDS output is configurable using `LVDS_POL`. Under normal conditions, a Logic 1 is represented by a high output on DOUTn_P and a low output on DOUTn_N. If the polarity is inverted (`LVDS_POL = 1`), a Logic 1 is represented by a low output on DOUTn_P and a high output on DOUTn_N.

The assigned bit positions for the sample data varies between different formats. The bit positions for each format can also be reordered or reversed as follows:

- The `LVDS_REVERSE` bit, if set, causes each data block to be reversed
- The `LVDS_BIT_ORDER` bit, if clear, causes the bit order of each sample, and any status flags, to be swapped

An example 16-bit data block is shown in Fig. 4-27. The corresponding reverse format is shown in Fig. 4-28. The swapped bit order is shown in Fig. 4-29. The combination of reverse + swapped bit order is shown in Fig. 4-30.

DOUT3	S0	S1	S2	CH1[0]	CH1[1]	CH1[2]	CH1[3]
DOUT2	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH1[10]
DOUT1	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	S3	S4
DCLKOUT	H	H	L	L	L	H	H

Figure 4-27. LVDS Example

DOUT3	CH1[3]	CH1[2]	CH1[1]	CH1[0]	S2	S1	S0
DOUT2	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]	CH1[5]	CH1[4]
DOUT1	S4	S3	CH1[15]	CH1[14]	CH1[13]	CH1[12]	CH1[11]
DCLKOUT	H	H	L	L	L	H	H

Figure 4-28. LVDS Example—Reverse

DOUT3	S4	S3	S2	CH1[15]	CH1[14]	CH1[13]	CH1[12]
DOUT2	CH1[11]	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]	CH1[5]
DOUT1	CH1[4]	CH1[3]	CH1[2]	CH1[1]	CH1[0]	S1	S0
DCLKOUT	H	H	L	L	L	H	H

Figure 4-29. LVDS Example—Swapped Bit Order

DOUT3	CH1[12]	CH1[13]	CH1[14]	CH1[15]	S2	S3	S4
DOUT2	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH1[10]	CH1[11]
DOUT1	S0	S1	CH1[0]	CH1[1]	CH1[2]	CH1[3]	CH1[4]
DCLKOUT	H	H	L	L	L	H	H

Figure 4-30. LVDS Example—Reverse + Swapped Bit Order

An example 10-bit data block is shown in Fig. 4-31. The corresponding reverse format is shown in Fig. 4-32. The swapped bit order is shown in Fig. 4-33. The combination of reverse + swapped bit order is shown in Fig. 4-34.

DOUT2	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]
DOUT1	S0	S1	S2	S3	CH2[0]	CH2[1]	CH2[2]
DCLKOUT	H	H	L	L	L	H	H

Figure 4-31. LVDS Example

DOUT2	CH2[9]	CH2[8]	CH2[7]	CH2[6]	CH2[5]	CH2[4]	CH2[3]
DOUT1	CH2[2]	CH2[1]	CH2[0]	S3	S2	S1	S0
DCLKOUT	H	H	L	L	L	H	H

Figure 4-32. LVDS Example—Reverse

DOUT2	CH2[6]	CH2[5]	CH2[4]	CH2[3]	CH2[2]	CH2[1]	CH2[0]
DOUT1	S3	S2	S1	S0	CH2[9]	CH2[8]	CH2[7]
DCLKOUT	H	H	L	L	L	H	H

Figure 4-33. LVDS Example—Swapped Bit Order

DOUT2	CH2[0]	CH2[1]	CH2[2]	CH2[3]	CH2[4]	CH2[5]	CH2[6]
DOUT1	CH2[7]	CH2[8]	CH2[9]	S0	S1	S2	S3
DCLKOUT	H	H	L	L	L	H	H

Figure 4-34. LVDS Example—Reverse + Swapped Bit Order

The CS82L44 supports LVDS output formats as summarized in Table 4-3. Detailed descriptions of each format are provided in Section 5.1.1, and are referenced in the table. Each format is selected by setting the **FORMAT_SEL** field to the applicable ID value.

The number of clock cycles per pixel indicates the number of DCLKOUT cycles required to transmit one data sample for the applicable number of channels; in some cases, a fractional ratio is specified, indicating the output format spans more than one pixel before repeating (e.g., 1.5 = 3 clock cycles per 2 pixels).

The LVDS output formats are summarized in Table 4-3.

Table 4-3. LVDS Output Formats

Number of Channels	Bits per Channel	Number of Data Pairs	Clock Cycles per Pixel	Number of Status Flags	Format ID	Reference
4	16	3	4	5	27	Fig. 5-1
					35	Fig. 5-7
					43	Fig. 5-13
3	16	3	3	5	26	Fig. 5-2
					34	Fig. 5-8
					42	Fig. 5-14
3	10	2	4	4	39	Fig. 5-10
					31	Fig. 5-4
		3	2	1	38	Fig. 5-11
3	10	3	1.5 (3/2)	1	30	Fig. 5-5

Table 4-3. LVDS Output Formats (Cont.)


Number of Channels	Bits per Channel	Number of Data Pairs	Clock Cycles per Pixel	Number of Status Flags	Format ID	Reference
2	16	3	2	5	25	Fig. 5-3
					33	Fig. 5-9
					41	Fig. 5-15
	10	2	2	4	37	Fig. 5-12
		3	1	1	29	Fig. 5-6

4.5.3 CMOS (TG) Formats

In CMOS (TG) output format, the CS82L44 provides single-ended clock/data output. The clock is supported on the DCLKOUT1 pin. A configurable status flag, S0, is supported on the DCLKOUT2 pin. The data output is distributed over a maximum of six data lines, DOUTn.

The status flag, S0, can be used to indicate the start of the scan image. In typical applications, this is achieved by configuring the status flag as a flag-pixel indication. See [Section 4.5.1](#) to configure the S0 status flag.

The CMOS (TG) format is illustrated in [Fig. 4-35](#). See [Table 3-17](#) for timing specifications.

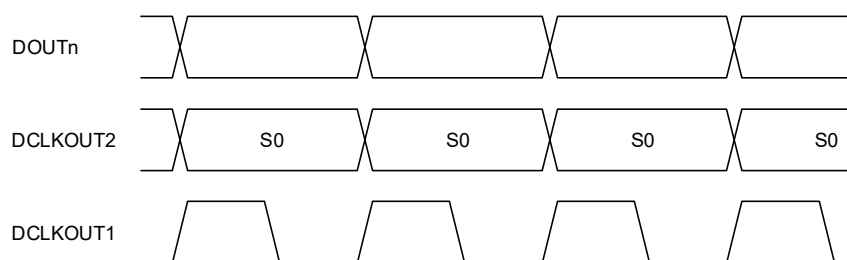
Figure 4-35. CMOS (TG) Output Format

The CS82L44 supports CMOS (TG) output formats as summarized in [Table 4-4](#). Detailed descriptions of each format are provided in [Section 5.1.2](#), and are referenced in the table. Each format is selected by setting the `FORMAT_SEL` field to the applicable ID value.

The number of clock cycles per pixel indicates the number of DCLKOUT1 cycles required to transmit one data sample for the applicable number of channels. Note that, if this number is greater than six, the CS82L44 must be configured in Clocking Mode 1 or Clocking Mode 2 (see [Section 4.3](#)).

The CMOS (TG) output formats are summarized in [Table 4-4](#).

Table 4-4. CMOS (TG) Output Formats

Number of Channels	Bits per Channel	Number of Data Lines	Clock Cycles per Pixel	Format ID	Reference
4	12	6	8 [1]	23	Fig. 5-16
3	12	6	6	22	Fig. 5-17
2	12	6	4	21	Fig. 5-18

1. Only supported in Clocking Mode 1 or Clocking Mode 2 (see [Section 4.3](#)).

4.5.4 CMOS (External) Formats

In CMOS (External) output format, the CS82L44 provides single-ended data output, distributed over a maximum of eight data lines, DOUTn. Signal timing is referenced to the external clock input (on the MCLK_EXT pin). The data output is supported in single- or double-rate formats:

- In single-data-rate (SDR) formats, the data bit rate is equal to the MCLK rate
- In double-data-rate (DDR) formats, the data bit rate is $2 \times$ MCLK rate

Note that the CMOS (External) output format is supported in External Mode only (see [Section 4.6](#)). The MCLK frequency is a multiple of the pixel-sample rate, where the applicable frequency ratio is dependent on the selected output data format.

The latency of the output data from the VSMP_EXT trigger signal is described in [Section 4.6.2](#) and [Section 4.6.3](#).

The CMOS (External) format is illustrated in [Fig. 4-36](#). See [Table 3-17](#) for timing specifications.

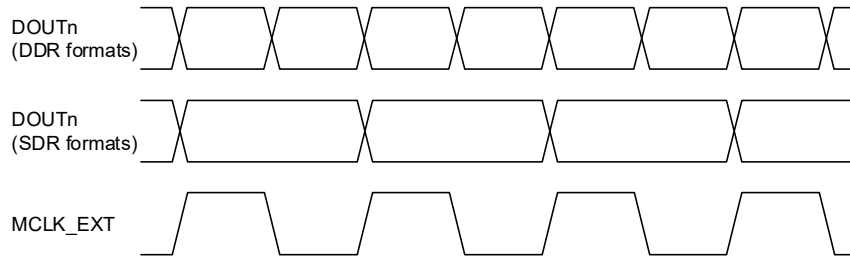


Figure 4-36. CMOS (External) Output Format

The format is configurable using [CMOS_EXT_POL](#), allowing the data output to be referenced to either the rising or falling edge of the MCLK input.

The CS82L44 supports CMOS (External) output formats as summarized in [Table 4-5](#). Detailed descriptions of each format are provided in [Section 5.1.3](#), and are referenced in the table. Each format is selected by setting the [FORMAT_SEL](#) field to the applicable ID value.

The number of MCLK cycles per pixel indicates the number of MCLK cycles required to transmit one data sample for the applicable number of channels. The MCLK frequency must be provided at the applicable rate:

$$\text{MCLK frequency} = \text{Pixel rate} \times \text{MCLK cycles per pixel}$$

The CMOS (External) output formats are summarized in [Table 4-5](#).

Table 4-5. CMOS (External) Output Formats

Number of Channels	Bits per Channel	Number of Data Lines	Data Rate	MCLK Cycles per Pixel	Format ID	Reference
4	16	4	DDR	8	15	Fig. 5-22
		8	DDR	4	3	Fig. 5-19
	SDR		8	11	Fig. 5-30	
	8	SDR	4	7	Fig. 5-27	
3	16	4	DDR	6	14	Fig. 5-23
		8	DDR	3	2	Fig. 5-20
	SDR		6	10	Fig. 5-31	
8	SDR	3	6	Fig. 5-28		
2	16	4	DDR	4	13	Fig. 5-24
		8	DDR	2	1	Fig. 5-21
	SDR		4	9	Fig. 5-32	
	8	SDR	2	5	Fig. 5-29	

4.5.4.1 TDM Mode

The CS82L44 can be configured in TDM Mode, where the outputs from two devices are multiplexed on a single data bus. This can be used to increase the effective number of channels in the system. Note that TDM is supported in External Mode only (see [Section 4.6](#)).

In TDM Mode, the two devices use the same VSMP_EXT and MCLK_EXT timing signals. Both devices must be configured for the same output format. Note that the MCLK frequency must be increased to take account of the data output for both devices.

Typical connections for TDM Mode are shown in Fig. 4-37.

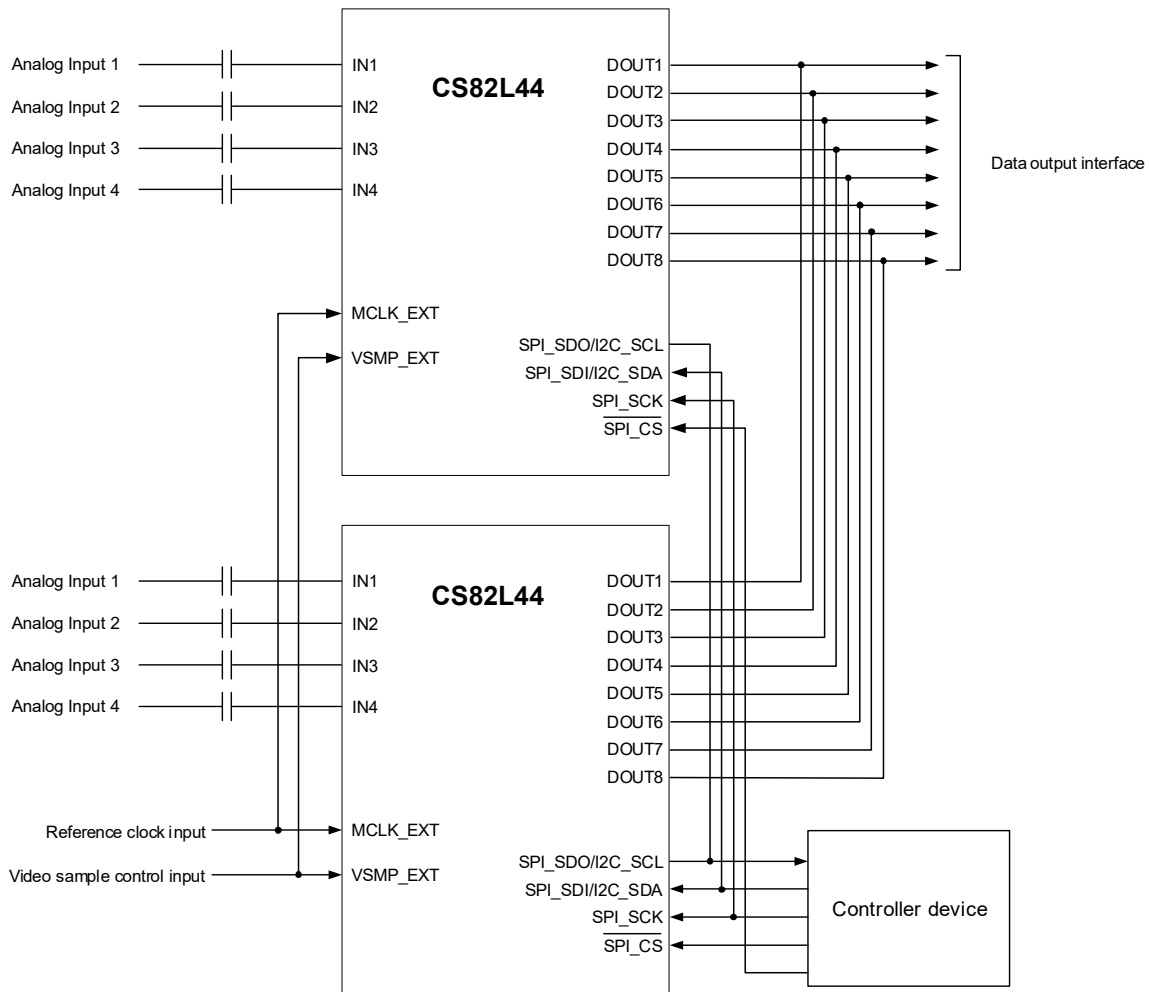


Figure 4-37. TDM Mode

TDM Mode is enabled using [TDM_EN](#). If this bit is set, the output format is configured to allow two devices to transmit data in turn. The DOUTn pins are Hi-Z when not transmitting data, allowing another device to drive the shared output interface.

The timing of the data output is configured using [TDM_OFFSET](#). This field is used to offset the data output of the two devices, ensuring only one device transmits at any time. In typical use cases, the offset between the two devices is set equal to the number of MCLK cycles per pixel in the selected output format (see [Table 4-5](#)). For example, one device is configured for the minimum delay (0 MCLK cycles); the other device is configured for the number of MCLK cycles per pixel.

A delay can be configured between one device transmitting and the other; this allows additional time for each device to cease driving the output before the other device starts. There are two options for configuring the delay.

- If [TDM_DOUT_DLY_EN](#) is set, a delay is applied each time the output drivers are enabled. The delay is configured using [TDM_DOUT_DLY_SEL](#). This provides fine control of the output timing.
- If [TDM_GAP](#) is set, a gap of one MCLK cycle is inserted after each data-output cycle. This bit must be set to the same value on each device. This provides a coarse control of the output timing.

Note: If [TDM_GAP](#) is set, the additional latency must also be added to the [TDM_OFFSET](#) value (i.e., incremented by 1).

In TDM Mode, the MCLK frequency must be increased to take account of the data output for both devices and the TDM gap, if enabled. The required MCLK frequency can be calculated using the following equation, where *MCLK cycles per pixel* is noted in [Table 4-5](#) for the applicable output format, and [TDM_GAP](#) is 0 or 1 according to the [TDM_GAP](#) bit:

$$\text{MCLK frequency} = 2 \times \text{Pixel rate} \times (\text{MCLK cycles per pixel} + \text{TDM_GAP})$$

The timing of the output data in TDM Mode is illustrated in Fig. 4-38 and Fig. 4-39. In the examples shown, the data-output format comprises four MCLK cycles for each device.

TDM Mode with `TDM_GAP = 0` is shown in Fig. 4-38. The MCLK frequency is $8 \times$ pixel rate.

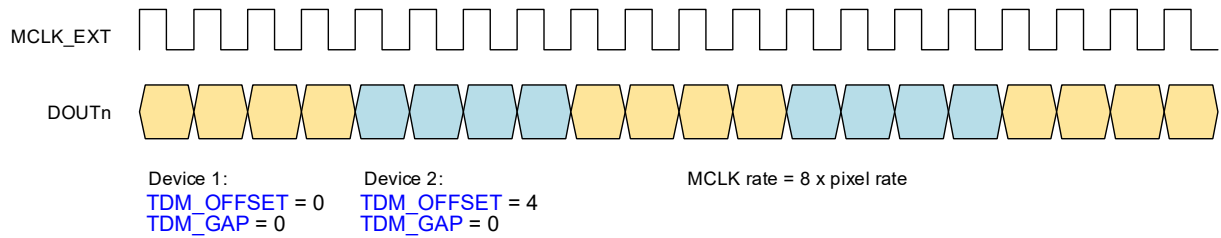


Figure 4-38. TDM Data Timing—Gap Disabled

TDM Mode with `TDM_GAP = 1` is shown in Fig. 4-39. The MCLK frequency is $10 \times$ pixel rate.

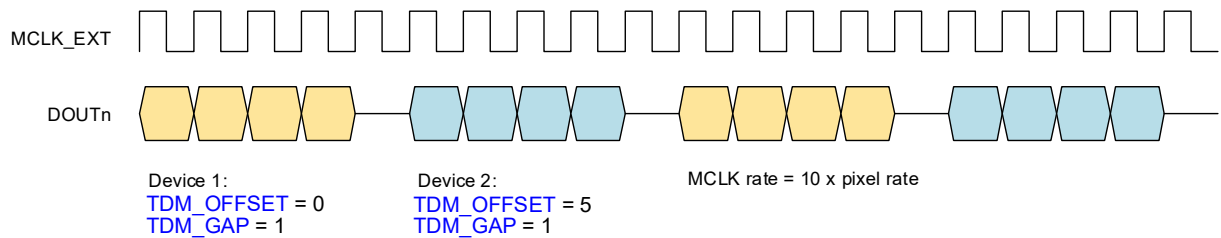


Figure 4-39. TDM Data Timing—Gap Enabled

4.6 Sample Timing Control

The CS82L44 supports CDS and non-CDS sampling modes. CDS refers to correlated double-sampling—in CDS mode, the reset level and the video level are sampled for each pixel; in non-CDS mode, a single video-level sample is used for each pixel. The sampling mode is configured using `CDS_EN`.

The sample timing is controlled by the internal VSMP and RSMP signals—the video level is sampled on the falling edge of VSMP; the reset level is sampled on the falling edge of RSMP.

Note: The RSMP signal is used in CDS sampling mode only. RSMP is not used in non-CDS sampling mode.

The ADC sample/conversion timing is controlled by the AFECK signal. The rising edge of AFECK occurs after the falling edge of VSMP. The AFECK signal must be optimized according to the application requirements, to ensure correct sequencing of the associated functions.

In typical applications, the VSMP, RSMP, and AFECK timing is generated internally using the DLL. The external MCLK provides the timing reference for the DLL (see Section 4.3 for clocking modes). The 60-tap DLL subdivides the sample period, and is used to define the phase offsets for VSMP, RSMP, and AFECK.

Alternatively, the sample timing can be controlled using external hardware inputs. The external signals can be configured to trigger the internal VSMP and RSMP signals directly, or can be retimed to align with the MCLK reference input. The AFECK timing is configured with reference to the MCLK input.

To assist in debug and timing set-up, the VSMP, RSMP, and AFECK signals can be monitored externally as described in Section 4.12.

The CDS timing for a typical CCD-sensor video signal is shown in Fig. 4-40.

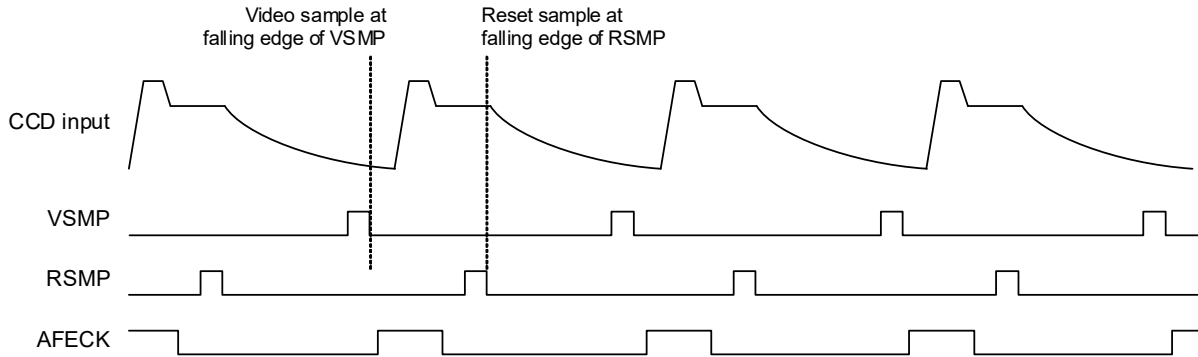


Figure 4-40. Sample Timing Control (CDS Mode)

The non-CDS timing for a typical CIS-sensor video signal is shown in Fig. 4-41.

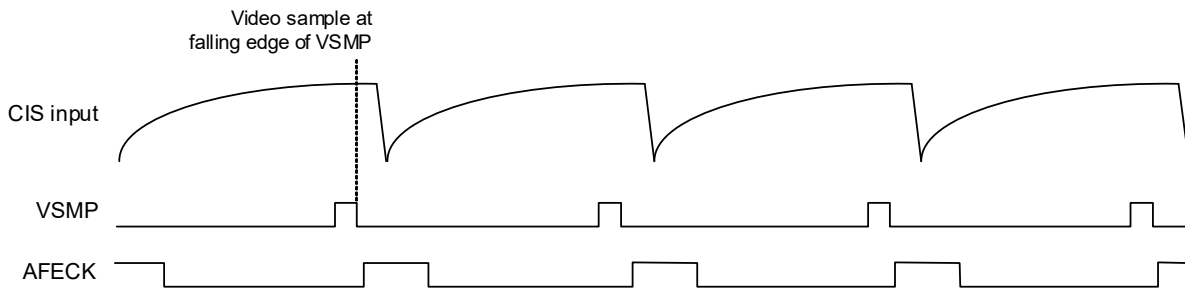


Figure 4-41. Sample Timing Control (non-CDS Mode)

4.6.1 DLL-Controlled Trigger (TG Mode)

In TG Mode, the VSMP, RSMP, and AFECK signals are generated internally using the DLL. The DLL reference (DLL_REF) is derived from the external clock signal (MCLK_EXT)—either directly, or else using PLL1 to synthesize a different sample frequency. TG Mode is selected if `EXTERNAL_MODE_EN = 0`.

The DLL divides the sample period into 60 stages, enabling the VSMP, RSMP, and AFECK signals to be configured at the required duty cycle and phase offset, referenced to the 1/60 steps of the DLL output.

- The rising and falling edges of VSMP are configured using `DLL_VSMP_RISE` and `DLL_VSMP_FALL` to align the respective edge with the applicable DLL Tap (0–59).
- The rising and falling edges of RSMP are configured using `DLL_RSMP_RISE` and `DLL_RSMP_FALL` to align the respective edge with the applicable DLL Tap (0–59).
- The rising edge of AFECK occurs 1 Tap after the VSMP falling edge. The falling edge of AFECK is configured using `DLL_AFECK_DUR` to define the duration of the AFECK pulse.

The timing constraints in Table 3-11 must be observed when configuring the duty cycle and phase offset of VSMP, RSMP, and AFECK. A minimum pulse duration is specified for each signal; it is recommended to configure the shortest possible duration within the defined limits. The VSMP, RSMP, and AFECK pulses must not overlap.

Notes: The VSMP, RSMP, and AFECK pulses can be asserted across the Tap 0 boundary if desired.

The RSMP signal is used in CDS sampling mode only. If `CDS_EN = 0`, there is no requirement to configure RSMP, and the associated timing constraints do not apply.

The DLL-controlled VSMP, RSMP, and AFECK timing is illustrated in Fig. 4-42.

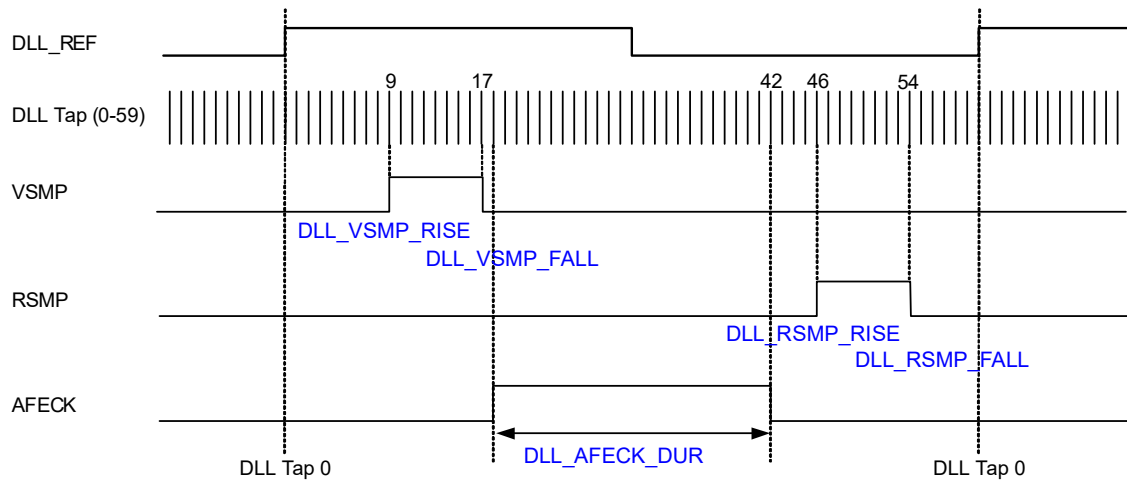


Figure 4-42. DLL Timing Control (TG Mode)

In TG Mode, the data output is supported in LVDS and CMOS (TG) data formats, described in Section 4.5.2 and Section 4.5.3 respectively. The latency of the output is dependent on the selected data format. The latency is defined from the rising edge of AFECK (i.e., the first MCLK rising edge after the VSMP falling edge), as shown in Fig. 4-43.

Note: Latency is defined for Clocking Mode 0 only (see Section 4.3). In this mode, the pixel sample rate is equal to the MCLK frequency. The specified latency has a tolerance of ± 1 MCLK cycle.

For LVDS data formats, the latency (measured in MCLK cycles) is defined as follows:

- Output latency = $(8 / \text{Clock cycles per pixel}) + 8$
 where *Clock cycles per pixel* is noted in Table 4-3 for the applicable output format
- If using the pattern generator (see Section 4.4.11), the output latency is $(8 / \text{Clock cycles per pixel}) + 4$
- The data output latency is illustrated in Fig. 4-43.

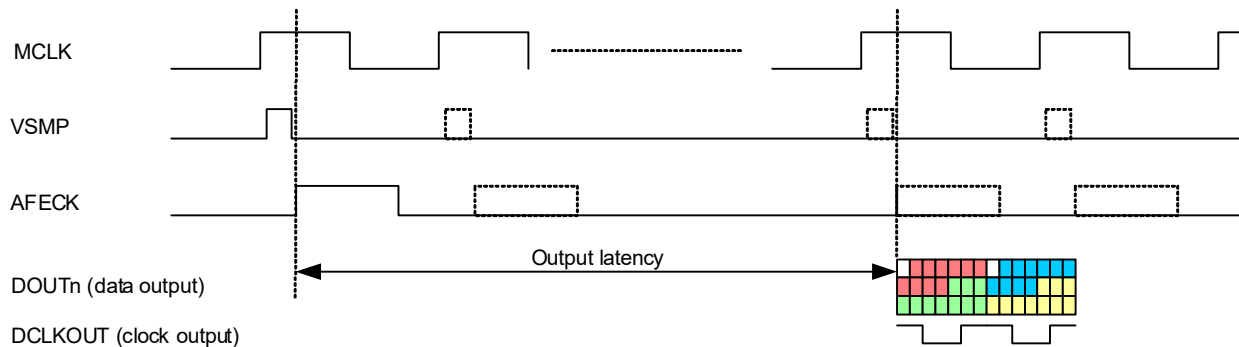


Figure 4-43. Data Output Timing (TG Mode, LVDS Output)

For CMOS (TG) data formats, the latency (measured in MCLK cycles) is defined as follows:

- Output latency = $(15 / \text{Clock cycles per pixel}) + 8$
 where *Clock cycles per pixel* is noted in [Table 4-4](#) for the applicable output format
- If using the pattern generator (see [Section 4.4.11](#)), the output latency is $(15 / \text{Clock cycles per pixel}) + 4$
- The data output latency is illustrated in [Fig. 4-44](#).

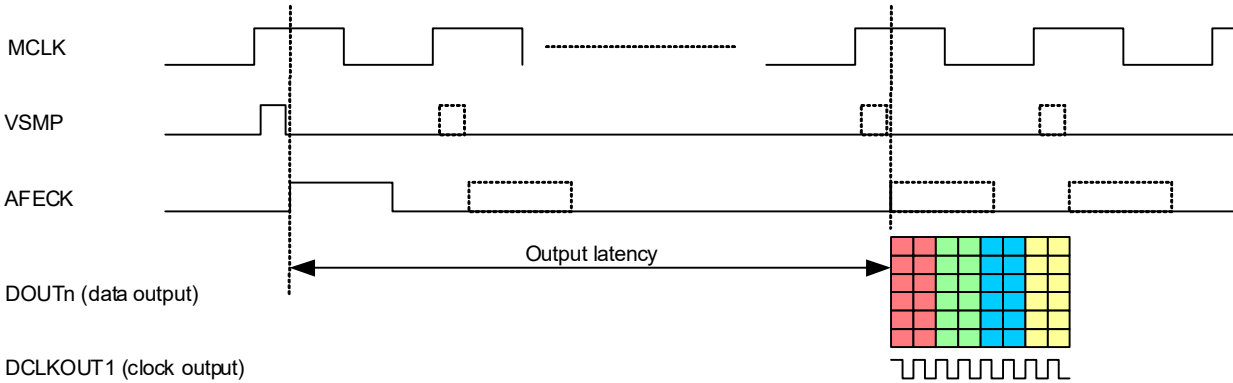


Figure 4-44. Data Output Timing (TG Mode, CMOS Output)

4.6.2 Direct Pin Trigger (External Mode 1)

In External Mode 1, the VSMP and RSMP signals are controlled directly using external hardware inputs. The video sample is triggered on the falling edge of VSMP_EXT; the reset-level sample is triggered on the falling edge of RSMP_EXT.

External Mode 1 is selected if `EXTERNAL_MODE_EN = 1` and `EXTERNAL_MODE_SEL = 0`.

This mode requires that the external MCLK frequency is a multiple of the pixel-sample rate; the applicable frequency ratio is dependent on the selected output data format (see [Section 4.5.4](#)).

The rising edge of AFECK occurs on the first MCLK rising edge after the VSMP falling edge. The falling edge of AFECK is configured using `EXT_AFECK_DUR` to define the duration of the AFECK pulse.

The timing constraints in [Table 3-13](#) must be observed when controlling VSMP and RSMP directly from the external pins. A minimum pulse duration is specified for each signal; it is recommended to configure the shortest possible AFECK pulse within the defined limits. The VSMP, RSMP, and AFECK pulses must not overlap.

Note: Note the RSMP signal is used in CDS sampling mode only. If `CDS_EN = 0`, the RSMP timing constraints do not apply.

The VSMP_EXT and RSMP_EXT functions are supported on multifunction pins, which must be configured for the required functions as described in [Section 4.11](#).

The direct-pin trigger is illustrated in [Fig. 4-45](#).

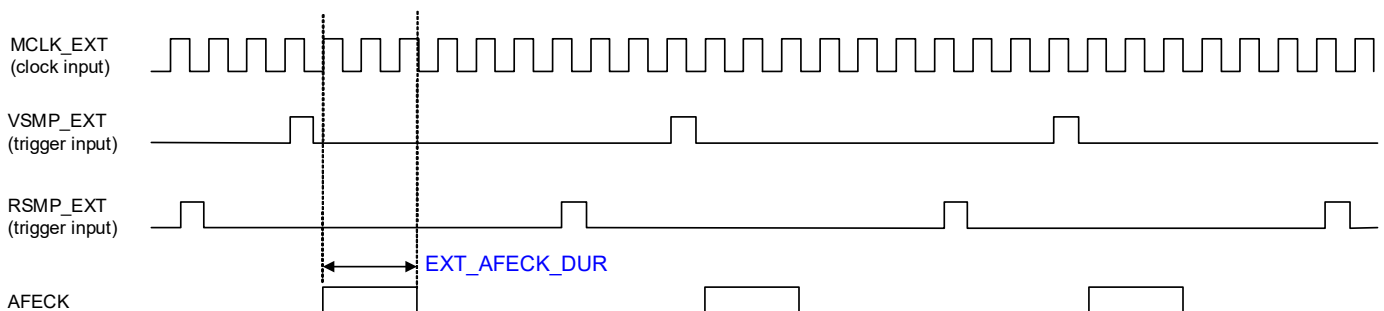


Figure 4-45. Direct-Pin Timing (External Mode 1)

In External Mode 1, the data output is formatted as described in [Section 4.5.4](#). The latency of the output is dependent on the selected data format and the TDM configuration (if applicable). The latency is defined from the rising edge of AFECK (i.e., the first MCLK rising edge after the VSMP falling edge), as shown in [Fig. 4-46](#).

The latency (measured in MCLK cycles) is defined as follows, where *MCLK cycles per pixel* is noted in [Table 4-5](#) for the applicable output format.

- If `TDM_EN` = 0, output latency = $(7 \times \text{MCLK cycles per pixel}) + 15$
- If `TDM_EN` = 1 and `TDM_GAP` = 0, output latency = $(14 \times \text{MCLK cycles per pixel}) + 30$
- If `TDM_EN` = 1 and `TDM_GAP` = 1, output latency = $(14 \times (\text{MCLK cycles per pixel} + 0.5)) + 30$
- If `CMOS_EXT_POL` = 1, the latency is increased by 0.5 MCLK cycle; data output starts on the falling MCLK edge

The data output latency is illustrated in [Fig. 4-46](#).

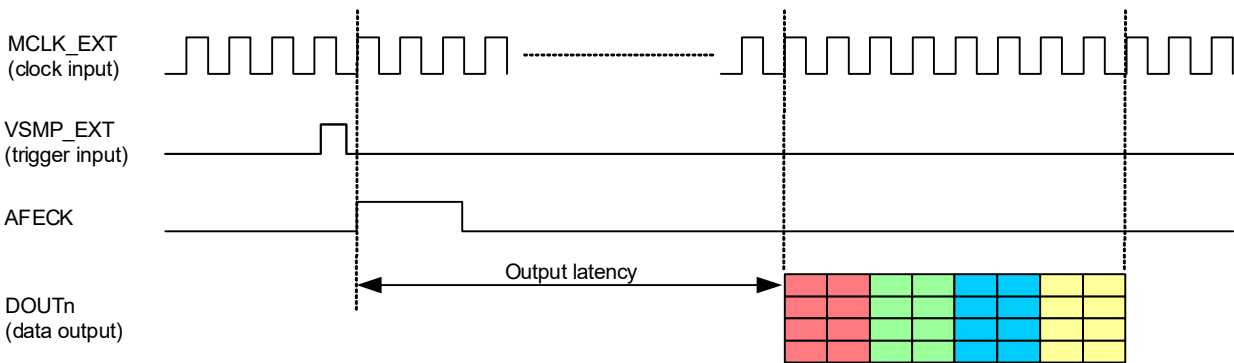


Figure 4-46. Data Output Timing (External Mode 1)

4.6.3 MCLK-Aligned Trigger (External Mode 2)

In External Mode 2, the VSMP, RSMP, and AFECK signals are controlled using the VSMP_EXT pin as the trigger. The active edge of the trigger (rising or falling) is selectable. The internal signals are retimed to align with the MCLK input; this can be used to ensure the internal pulses do not exceed a minimum duration, regardless of the external trigger.

External Mode 2 is selected if `EXTERNAL_MODE_EN` = 1 and `EXTERNAL_MODE_SEL` = 1.

This mode requires that the external MCLK frequency is a multiple of the pixel-sample rate; the applicable frequency ratio is dependent on the selected output data format (see [Section 4.5.4](#)).

The MCLK-aligned signals are configured as follows:

- The VSMP timing is controlled using `VSMP_EXT_DLY` to select the number of MCLK cycles between the active VSMP_EXT edge and the rising edge of VSMP. The falling edge of VSMP is one MCLK cycle after the rising edge.
- The RSMP timing is controlled using `RSMP_EXT_DLY` to select the number of MCLK cycles between rising edge of VSMP and the rising edge of RSMP. The falling edge of RSMP is one MCLK cycle after the rising edge.
- The rising edge of AFECK occurs at the same time as the VSMP falling edge. The falling edge of AFECK is configured using `EXT_AFECK_DUR` to define the duration of the AFECK pulse.

The rising edge of VSMP is configured as described above. The rising edge is delayed by a number of MCLK cycles—if a delay of *n* cycles is selected, the rising edge of VSMP occurs on the *n*-th rising edge of MCLK after the rising edge of the VSMP_EXT signal.

The timing constraints in [Table 3-14](#) must be observed when configuring the phase offset of VSMP, RSMP, and AFECK. It is recommended to configure the shortest possible AFECK pulse within the defined limits. The VSMP, RSMP, and AFECK pulses must not overlap.

Note: The RSMP signal is used in CDS sampling mode only. If `CDS_EN` = 0, there is no requirement to configure RSMP, and the associated timing constraints do not apply.

The VSMP_EXT function is supported on the TGSYNC1/VSMP_EXT pin, which must be configured for VSMP input as described in [Section 4.11](#). The active trigger edge is selectable using `VSMP_EXT_POL`.

The MCLK-aligned trigger is illustrated in [Fig. 4-47](#).

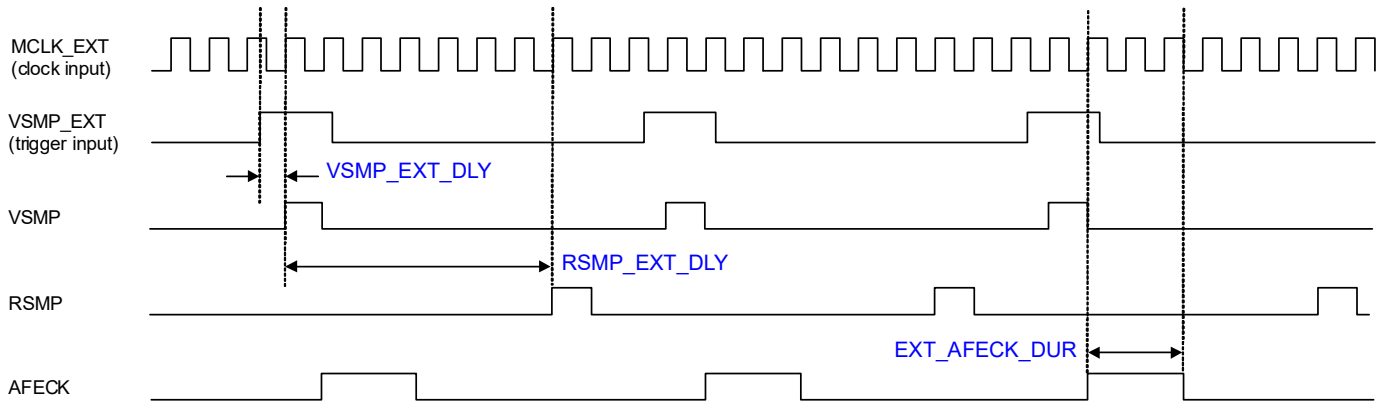


Figure 4-47. MCLK-Aligned Timing Control (External Mode 2)

In External Mode 2, the data output is formatted as described in [Section 4.5.4](#). The latency of the output is dependent on the selected data format and the TDM configuration (if applicable). The latency is defined from the rising edge of AFECK (i.e., the internal VSMP falling edge), as shown in [Fig. 4-48](#).

The latency (measured in MCLK cycles) is defined as follows, where *MCLK cycles per pixel* is noted in [Table 4-5](#) for the applicable output format.

- If `TDM_EN` = 0, output latency = $(7 \times \textit{MCLK cycles per pixel}) + 15$
- If `TDM_EN` = 1 and `TDM_GAP` = 0, output latency = $(14 \times \textit{MCLK cycles per pixel}) + 30$
- If `TDM_EN` = 1 and `TDM_GAP` = 1, output latency = $(14 \times (\textit{MCLK cycles per pixel} + 0.5)) + 30$
- If `CMOS_EXT_POL` = 1, the latency is increased by 0.5 MCLK cycle; data output starts on the falling MCLK edge

Note the latency is defined from the internal VSMP/AFECK signals. The additional latency from the active VSMP_EXT edge to the internal VSMP pulse is configurable using `VSMP_EXT_DLY`.

The data output latency is illustrated in [Fig. 4-48](#).

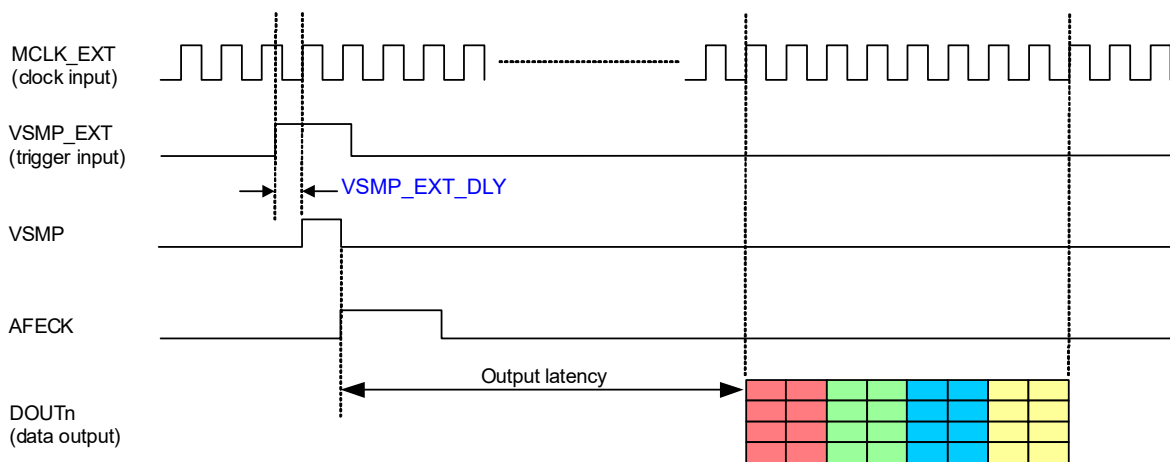


Figure 4-48. Data Output Timing (External Mode 2)

4.7 TG Sync and Pixel Counter Control

The video input signal is sampled on the falling edge of VSMP, as described in [Section 4.6](#). In typical applications, the samples represent pixels within a scan pattern; blocks of samples represent successive lines, or different scan colors, within the scan pattern.

Pixel counters (primary and secondary) are used to monitor the number of samples. The initial sample within the scan pattern is indicated using the TG Sync signal; this can be generated as an output from the CS82L44, or else can be provided as an external input. The sync signal may indicate the start of each scan line, or may signal intermediate stages within a scan line.

The scan pattern can be referenced to a sequence-state parameter, supporting a maximum of four sequential states. Each state represents a different portion of the scan pattern; this can be used to reconfigure the input path for different scan colors, or other functions, for the respective portions of the scan.

In External Mode (see [Section 4.6](#)), the pixel counter and related functions are disabled by default. The pixel counter sequence-state configuration can be enabled and used to control the LED output drivers by setting `EXTERNAL_MODE_TG_EN`. In this configuration, the TG Sync must be an input to the CS82L44 (i.e., TG Slave Mode).

4.7.1 TG Sync Mode and Sequence State

The TG Sync is configured in Master Mode or Slave Mode using `TGSYNC_MODE`. In Master Mode, TG Sync is an output from the CS82L44. In Slave Mode, TG Sync is an input.

The number of sequence states is configured using `NUM_SEQ_STATES`. The number of pixels in each state is configured using `SEQ_STATEx_LEN` (where x is 0, 1, 2, or 3 for the respective sequence state).

A maximum of four states is supported. The current sequence state is indicated in `SEQ_STATE_STS`.

The initial state is State 0 by default; this is configurable using `INIT_SEQ_STATE`. The sequence state is incremented as described in the following sections; under the applicable conditions, the sequence returns to the initial state.

For example, if the number of sequence states is four, and the initial state is State 1, the resulting sequence is State 1, State 2, State 3, State 0. Under the applicable conditions, the sequence restarts in State 1. Note that the initial state must be configured within the scope of the selected number of states (i.e., `INIT_SEQ_STATE ≤ NUM_SEQ_STATES`).

4.7.2 TG Master Mode

In Master Mode, TG Sync is an output from the CS82L44. The TG Sync pulse indicates the first pixel in the initial state (typically State 0).

The pixel counters start from zero and increment on each sample, for the configured length of the current sequence state. The sequence state then advances to the next state. The secondary pixel counter is reset on each state transition. At the end of the configured number of sequence states, the sequence state is reset to the initial state, and the TG Sync pulse indicates the start of the next cycle. The primary and secondary pixel counters are reset at the start of the cycle.

The TG Sync signal is supported on the TGSYNC1/VSMP_EXT pin, which must be configured for TGSYNC output as described in [Section 4.11](#). The duration of the TG Sync pulse can be configured using `TGSYNC_OUT_DUR`.

Master Mode operation with a single sequence state is illustrated in Fig. 4-49. In this configuration, the primary and secondary pixel counters provide the same function. The maximum pixel-counter value is determined by the duration of State 0. The TG Sync pulse is generated each time the pixel counters are reset.

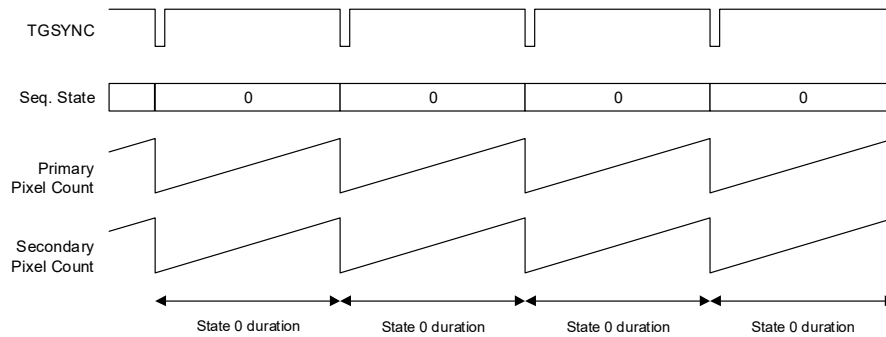


Figure 4-49. TG Master Mode—Single State

Master Mode operation with four sequence states is illustrated in Fig. 4-50. The number of pixels is configured independently for each state. The secondary pixel counter is reset on each state transition. The TG Sync pulse is generated when the primary pixel counter is reset to the initial state.

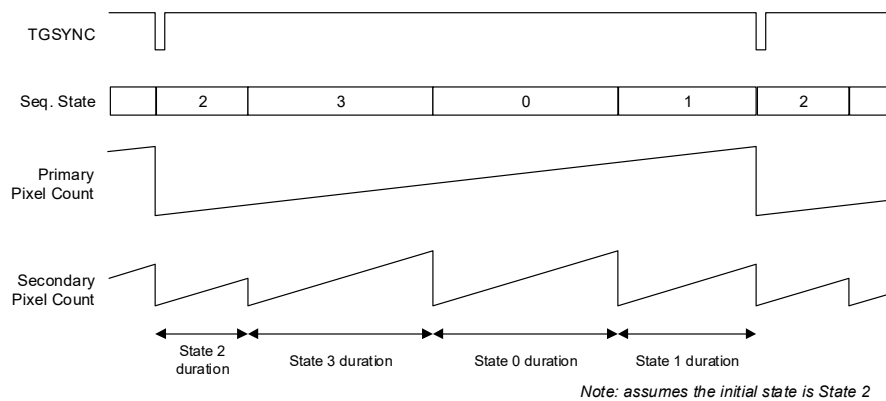


Figure 4-50. TG Master Mode—Multiple States

4.7.3 TG Slave Mode

In Slave Mode, TG Sync is an input to the CS82L44. The TG Sync signal is used to trigger the sequence-state transitions. Optionally, this can be used in conjunction with the LEDSTART signal to provide additional control of the sequence states.

The `TGSYNC_SINGLE_SEQ` bit selects whether the TG Sync triggers a cycle of multiple state transitions (Multiple Mode) or triggers a single state transition only (Single Mode).

- In Multiple Mode (`TGSYNC_SINGLE_SEQ = 0`), the TG Sync indicates the first pixel in the initial state. The pixel counters start from zero and increment on each sample, for the configured length of the current sequence state. The sequence state then advances to the next state. The secondary pixel counter is reset on each state transition. At the end of the configured number of sequence states, the pixel counters are frozen until the TG Sync signal indicates the start of the next cycle (typically State 0). The primary and secondary pixel counters are reset at the start of the cycle.
- In Single Mode (`TGSYNC_SINGLE_SEQ = 1`), the TG Sync indicates the first pixel in each sequence state. The pixel counters start from zero and increment on each sample, for the configured length of the current sequence state. The pixel counters are frozen at the end of each state, until TG Sync triggers the state transition. At the end of the configured number of sequence states, the TG Sync indicates the start of the next cycle (typically State 0). The primary and secondary pixel counters are reset at the start of the cycle.

The **LEDSTART_SEQ_INIT** bit selects whether the LEDSTART signal is used (in conjunction with TG Sync) to indicate the first pixel in the initial state. If this bit is clear, the sequence-state transitions are controlled using only the TG Sync input. If this bit is set, the LEDSTART and TG Sync signals must both be asserted to restart the sequence.

The TG Sync input is supported on three different pins—TGSYNC1, TGSYNC2, or LEDSTART. The applicable input is selected using **TGSYNC_IN_SRC**. The polarity of the selected input is configured using **TGSYNC_IN_POL**.

A filter can be applied to the selected TG Sync input, to avoid erroneous triggers. The filter is enabled using **TGSYNC_FILT_EN**. The external signal is sampled at the pixel rate, and decimated at a rate selected by **TGSYNC_FILT_DECM**. The decimated input is tested for a valid transition using the **TGSYNC_FILT_STAGE** field; for example, if a 6-stage filter is selected, a valid rising edge is detected if a 0–0–0–1–1–1 sequence is detected in the decimated input signal.

If **LEDSTART_SEQ_INIT** is set, LEDSTART indicates the first pixel in the initial state. In this configuration, the polarity of the LEDSTART input is selected using **LEDSTART_POL**.

A timing offset can be configured on the TG Sync input using **TGSYNC_IN_OFFSET**. The offset can be used to compensate for a delayed TG Sync input, enabling the pixel counters on two devices to be synchronized in a Master/Slave configuration. The offset is implemented by adjusting the initial pixel-counter value in each sequence state.

The TG Sync function must be set according to the applicable sample-timing configuration (see [Section 4.6](#)). If **EXTERNAL_MODE_EN** = 0, **TGSYNC_ASYNC** bit must be set. If **EXTERNAL_MODE_EN** = 1, **TGSYNC_ASYNC** bit must be clear.

The TG Sync and LEDSTART functions are supported on multifunction pins, which must be configured for the required functions as described in [Section 4.11](#). See [Section 4.7.3.1](#) for timing information.

Slave Mode operation with a single sequence state is illustrated in [Fig. 4-51](#). In this configuration, the primary and secondary pixel counters provide the same function. The pixel counters are reset on each TG Sync pulse. The maximum pixel-counter value is determined by the duration of State 0; both counters are frozen, if this limit is reached.

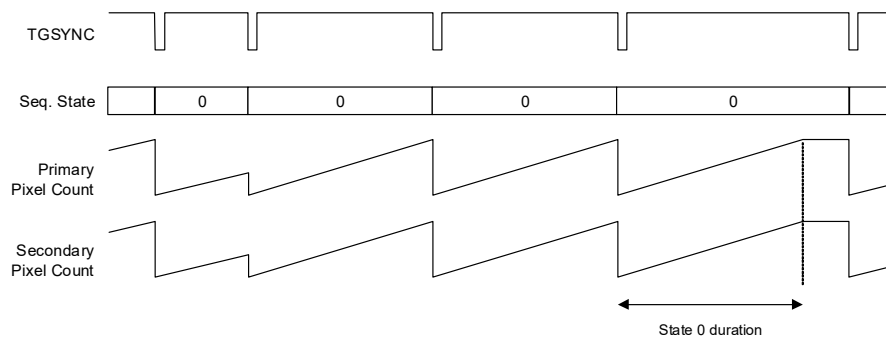


Figure 4-51. TG Slave Mode—Single State

Slave Mode (multiple cycle) operation with four sequence states is illustrated in Fig. 4-52. The maximum number of pixels is configured independently for each state (both counters are frozen, if this limit is reached). The secondary pixel counter is reset on each state transition. The primary pixel counter is reset, and the sequence state is re-initialized, on each TG Sync pulse.

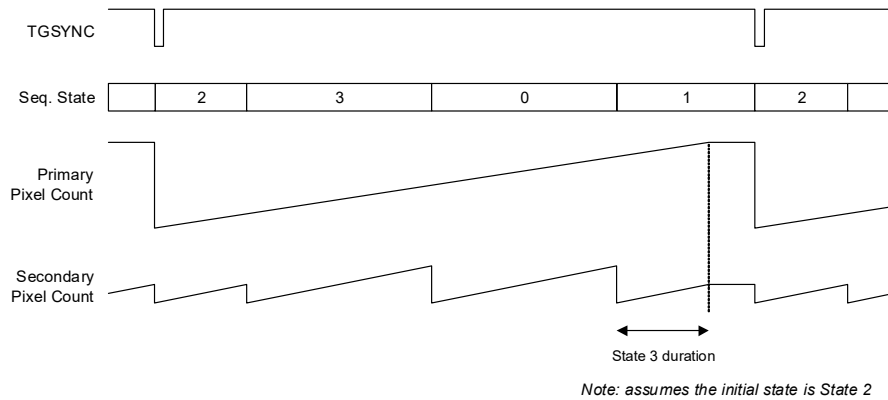


Figure 4-52. TG Slave Mode—Multiple Cycle, TGSYNC Trigger

Slave Mode (single cycle) operation with four sequence states is illustrated in Fig. 4-53. The maximum number of pixels is configured independently for each state (both counters are frozen, if this limit is reached). The secondary pixel counter is reset, and the sequence-state transition is triggered, on each TG Sync pulse. The primary pixel counter is reset when the sequence state returns to the initial state.

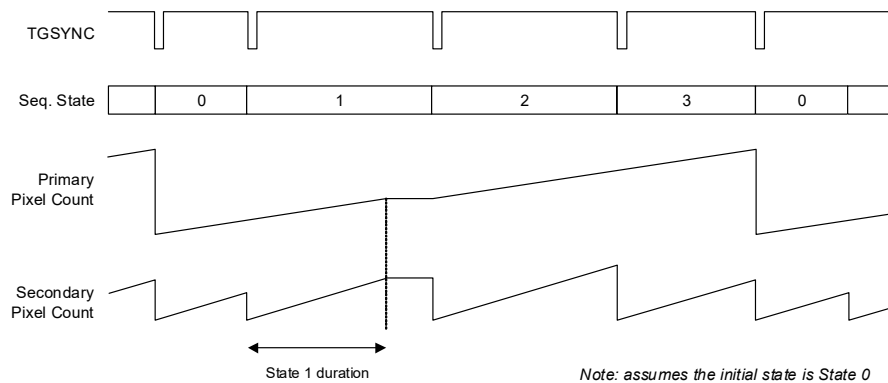


Figure 4-53. TG Slave Mode—Single Cycle, TGSYNC Trigger

Slave Mode (single cycle) operation with four sequence states is illustrated in Fig. 4-54. The maximum number of pixels is configured independently for each state (both counters are frozen, if this limit is reached). The secondary pixel counter is reset, and the sequence-state transition is triggered, on each TG Sync pulse. The primary pixel counter is reset when the sequence state is re-initialized using LEDSTART.

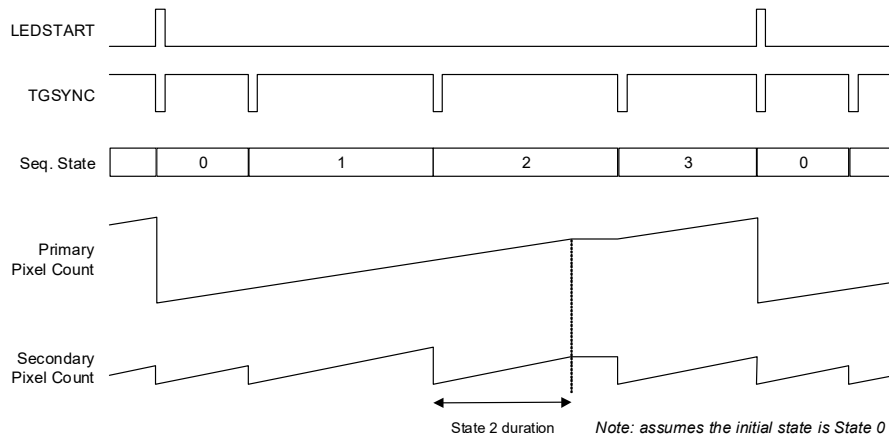


Figure 4-54. TG Slave Mode—Single Cycle, LEDSTART + TGSYNC Trigger

4.7.3.1 TGSYNC and LEDSTART Signal Timing

In TG Slave Mode, the TGSYNC signal is used to trigger the sequence-state transitions. Optionally, LEDSTART can be used to control the transition that re-initializes the sequence. The signals must conform to the applicable timing requirements.

In TG Mode—

- The TGSYNC and LEDSTART timing requirements are defined in Table 3-12, assuming Clocking Mode 0.
- If Clocking Mode 0 is selected and the TGSYNC filter is enabled (`TGSYNC_FILT_EN = 1`), the minimum TGSYNC pulse width is as follows.

$$((\text{Filter Stages} \times \text{Decimation Ratio} / 2) + 2) \quad \text{AFECK cycles}$$

where *Filter Stages* is the number of filter stages selected by `TGSYNC_FILT_STAGE` and *Decimation Ratio* is the ratio selected by `TGSYNC_FILT_DECM`. See Section 4.6.1 for details of AFECK.

- If Clocking Mode 1 or 2 is selected and the TGSYNC filter is disabled, the TGSYNC pulse width must be a minimum of 2 AFECK cycles.
- If Clocking Mode 1 or 2 is selected and the TGSYNC filter is enabled, the minimum TGSYNC pulse width is as follows.

$$((\text{Filter Stages} \times \text{Decimation Ratio} / 2) + 2) \quad \text{AFECK cycles}$$

- If Clocking Mode 1 or 2 is selected, the LEDSTART active edge must occur at least 1 ns before the TGSYNC active edge. The LEDSTART inactive edge must occur at or after the TGSYNC inactive edge.
- The TGSYNC timing applies to whichever pin is selected for TG Sync input (i.e., TGSYNC1, TGSYNC2, or LEDSTART). The LEDSTART timing applies to the LEDSTART function only (`LEDSTART_SEQ_INIT = 1`).

- If Clocking Mode 1 or 2 is selected, the timing requirements are as illustrated in [Fig. 4-55](#).

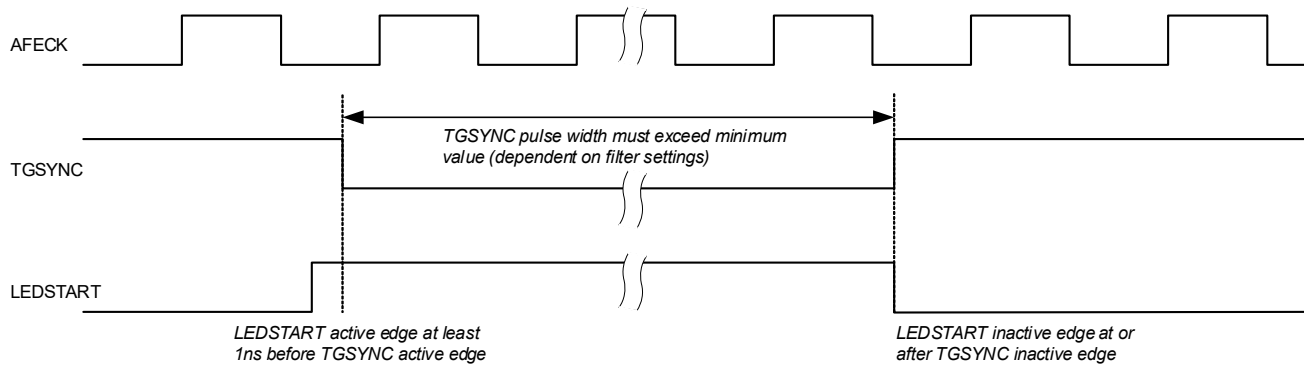


Figure 4-55. TGSYNC/LEDSTART Timing—TG Mode

In External Mode—

- The TGSYNC and LEDSTART timing requirements are defined in [Table 3-16](#), assuming the TGSYNC filter is disabled.
- If the TGSYNC filter is enabled (`TGSYNC_FILT_EN = 1`), the TGSYNC minimum pulse width is defined by the following equation:

$$(Filter\ Stages \times Decimation\ Ratio / 2) \quad MCLK\ cycles$$

where *Filter Stages* is the number of filter stages selected by `TGSYNC_FILT_STAGE` and *Decimation Ratio* is the ratio selected by `TGSYNC_FILT_DECM`.

- The LEDSTART active edge must occur at least 1 ns before the TGSYNC active edge. The LEDSTART inactive edge must occur at or after the TGSYNC inactive edge.
- The TGSYNC timing applies to whichever pin is selected for TG Sync input (i.e., TGSYNC1, TGSYNC2, or LEDSTART). The LEDSTART timing applies to the LEDSTART function only (`LEDSTART_SEQ_INIT = 1`).
- If the TGSYNC filter is enabled, the timing requirements are as illustrated in [Fig. 4-56](#).

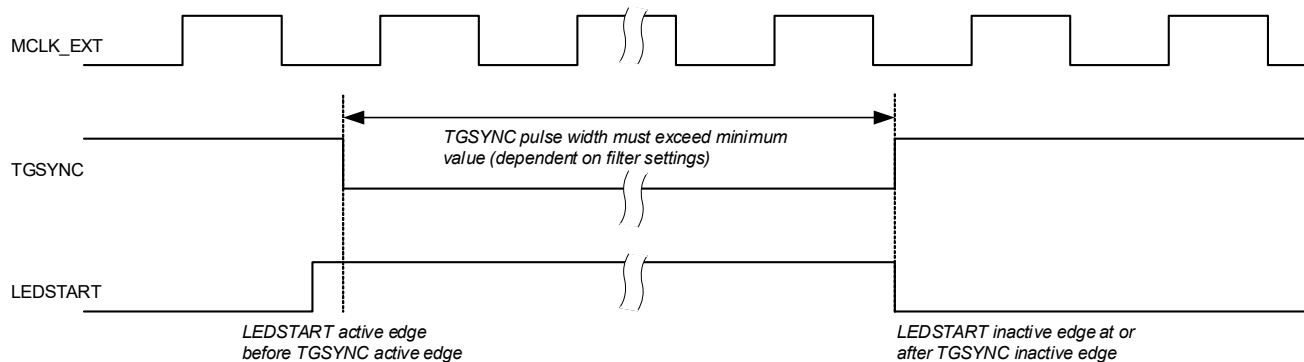


Figure 4-56. TGSYNC/LEDSTART Timing—External Mode

4.8 Clock Timing Generation

The CS82L44 incorporates highly configurable clock-timing functions. The clock signals are used to control various internal functions; they can also be used to provide timing control for external circuits.

The clock signals can be configured with reference to the pixel counters, where the behavior changes at specified pixel-counter values. *Toggle points* can be used to define the respective pixel-counter values. The clocks can also be configured with reference to the sequence state, allowing waveforms to be selectively enabled according to the current state.

The clock-timing signals fall into two types; both types can be provided as external outputs via the CLKOUTn pins.

- High-speed pixel-rate clocks, with configurable phase/duty cycle relative to the DLL reference
- Pulse waveforms that toggle at defined pixel-count boundaries within specified sequence states

The pulse waveforms can be used to control internal functions such as the input-path clamp or the LED output drivers. The same waveform can be selected as the control source to more than one function.

In External Mode (see [Section 4.6](#)), the clock-timing functions are disabled by default. The toggle points and pulse-output sources (POn) can be enabled and used to control the LED output drivers by setting [EXTERNAL_MODE_TG_EN](#).

4.8.1 Toggle Points

Toggle points are used to define instants in the scanning sequence where the device behavior should change. A maximum of 32 toggle points can be defined; each toggle point is defined by a pixel-counter value. The output of the clocks or pulse waveforms can be configured to change at specified toggle points.

The toggle points are defined using [TP0_PIXEL](#) through [TP31_PIXEL](#). Each toggle point is defined by a pixel-counter value.

The toggle points are referenced to the primary or secondary pixel counter using [TP_SEC_OFFSET](#). Toggle points (TPn) with an index less than the offset value are associated with the primary counter; toggle points with an index greater than or equal to the offset value are associated with the secondary counter.

For example, if [TP_SEC_OFFSET](#) = 10, toggle points TP0–TP9 are associated with the primary counter, and TP10–TP31 are associated with the secondary counter.

Note that the toggle points associated with each counter must be configured with incrementing values ([TP0_PIXEL](#) < [TP1_PIXEL](#) < [TP2_PIXEL](#), etc.). If the pixel counter is reset before it reaches the value configured for a toggle point, that toggle point is ignored.

4.8.2 Pulse Output Sources (POn)

The CS82L44 supports 11 pulse-output sources, PO0–PO10. The pulse-output sources can be configured to rise or fall at specified instants, referenced to the pixel-counter value. The resulting waveforms are used to control various internal functions and can also be used to provide timing control for external circuits.

The POn signals are configured using one of two methods.

- By default, the timing of the POn signals is defined with reference to the 32 toggle points; the toggle points allow efficient device configuration when switching multiple signals at the same pixel-counter values.
- If required, one or more POn signals can be configured using direct control; a limited pulse-output function is supported on the respective POn signals, with dedicated control fields used to define the switching points for each. The direct control allows the POn signals to be configured independently, without reference to the toggle points.

4.8.2.1 Toggle-Point Control

The pulse-output sources (POn) are configured using [POx_TP_POL](#). Each bit within these fields defines whether the pulse source is Logic 0 or Logic 1 at the respective toggle point. See [Section 4.8.1](#) for details of toggle points TP0–TP31.

The POn sources are referenced to the primary or secondary pixel counter using [POx_CNT_SEL](#). The toggle points associated with each counter are configured independently as described in [Section 4.8.1](#).

Note: If the primary pixel counter is selected, the [POx_TP_POL](#) bits 0–31 define the logic level at toggle points TO0–TP31 respectively. If the secondary pixel counter is selected, the mapping of the [POx_TP_POL](#) bits to the toggle points is offset by a number of bits equal to the [TP_SEC_OFFSET](#) value.

For example, if [TP_SEC_OFFSET](#) = 10, toggle points TP10–TP31 are associated with the secondary counter. In this case, if the secondary counter is selected, Bit 0 of [POx_TP_POL](#) defines the logic level at TP10, Bit 1 of [POx_TP_POL](#) defines the logic level at TP11, etc.

The initial logic level (when the selected counter is reset) is configured using `POx_INIT_LVL` for each pulse-output source. The level can be unchanged from the previous counter cycle, or can be set equal to the logic level of the first toggle point.

If a pulse-output source is referenced to the secondary pixel counter, it can be selectively enabled for individual sequence states using the respective `POx_SEQ_SEL` field. Each bit within these fields enables the waveform in the corresponding state.

The POn timing is aligned to the rising edge of the AFECK signal. See [Section 4.6](#) to configure the AFECK timing.

Note: There is a latency between the pixel count of the toggle point (TP) and the pixel count of the AFECK pulse at the switching point of the POn signal. If POn is configured to toggle at Pixel n , the toggle occurs at the Pixel $n+1$ AFECK rising edge.

The POn configuration is illustrated in [Fig. 4-57](#).

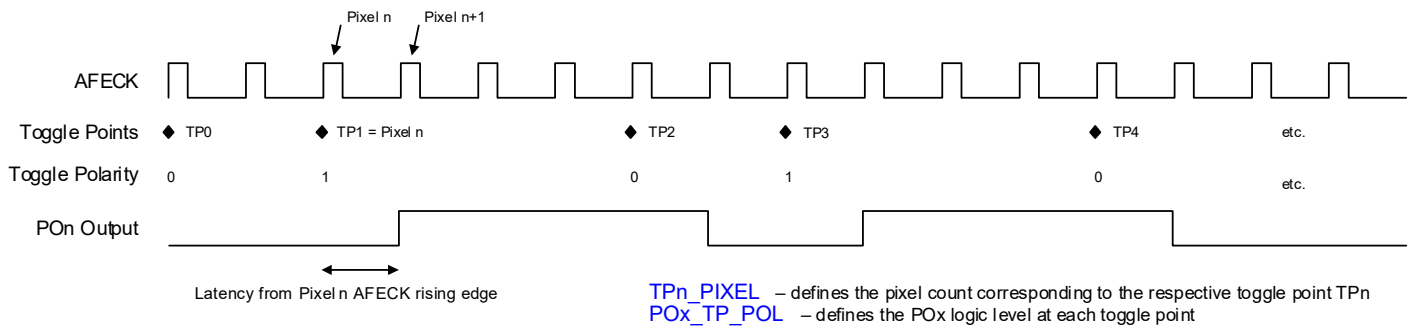


Figure 4-57. Pulse-Output (POn) Configuration—Toggle Point Control

4.8.2.2 Direct Control

One or more of the POn signals can be selected for direct control using `NUM_DC_PO`. Direct control is supported on pulse outputs PO5–PO10.

If a PO signal is selected for direct control, a single pulse can be configured using the respective `POx_TP_POL` field to define the pixel-counter value for the rising and falling edges—bits [15:0] configure the rising edge, and bits [31:16] configure the falling edge.

If more than one pulse is required, the `DC_PO_2ND_PULSE` bit can be used to enable a second pulse. The rising and falling edges of the second pulse are configured using the `TPn_PIXEL` fields. Depending on the number of POn signals selected for direct control, two or more of the `TPn_PIXEL` fields are assigned to this purpose, as indicated in [Table 4-6](#).

Notes: The `DC_PO_2ND_PULSE` bit enables the second pulse for all POn signals selected for direct control. If the second pulse is not required on specific POn signals, it can be disabled by setting the associated `TPn_PIXEL` fields to the same value, or to a value beyond the active range of the pixel counter (e.g., 0xFFFF).

The available number of toggle points is reduced if the second pulse is enabled for direct-control POn signals.

The control fields used to configure the direct-control POn signals are summarized in [Table 4-6](#).

Table 4-6. Pulse Output (POn) Direct Control

NUM_DC_PO	Direct Control POn Signals	Single Pulse Control 1	Second Pulse Control (DC_PO_2ND_PULSE = 1) ²					
			PO5	PO6	PO7	PO8	PO9	PO10
0x0	None	—	—	—	—	—	—	—
0x1	PO10	PO10_TP_POL	—	—	—	—	—	TP30_PIXEL
0x2	PO9–PO10	POx_TP_POL	—	—	—	—	TP28_PIXEL	TP31_PIXEL
0x3	PO8–PO10	POx_TP_POL	—	—	—	TP26_PIXEL	TP29_PIXEL	
0x4	PO7–PO10	POx_TP_POL	—	—	TP24_PIXEL	TP27_PIXEL		
0x5	PO6–PO10	POx_TP_POL	—	TP22_PIXEL	TP25_PIXEL			
0x6	PO5–PO10	POx_TP_POL	TP20_PIXEL	TP23_PIXEL				

1. The **POx_TP_POL** fields define the rise/fall edges for the respective POn signal.
2. If the second pulse is enabled, the **TPn_PIXEL** fields define the rise/fall edges for the additional pulse.

If the **POx_TP_POL** or **TPn_PIXEL** fields associated with a direct-control POn signal are updated, the new values are buffered and do not become effective until the sequence state is re-initialized on the applicable TG Sync pulse.

The POn sources are referenced to the primary or secondary pixel counter using **POx_CNT_SEL**.

The initial logic level (when the selected counter is reset) is configured using **POx_DC_INIT_LVL** for each pulse-output source; the level can be either Logic 0 or Logic 1.

Note: If the initial level is Logic 1, it may be desired for the POn falling edge to occur before the rising edge. The CS82L44 allows the rising and falling edges to be configured in any order.

The pulse-output sources can be selectively enabled for individual sequence states using **POx_SEQ_SEL**. Each bit within these fields enables the waveform in the corresponding state.

The POn timing is aligned to the rising edge of the AFECK signal. See [Section 4.6](#) to configure the AFECK timing.

Note: There is a latency between the pixel count of the POx pulse edges and the pixel count of the AFECK pulse at the switching point of the POx signal. If POx is configured to toggle at Pixel *n*, the toggle occurs at the Pixel *n+1* AFECK rising edge.

The POn configuration is illustrated in [Fig. 4-58](#), using the PO10 signal as an example.

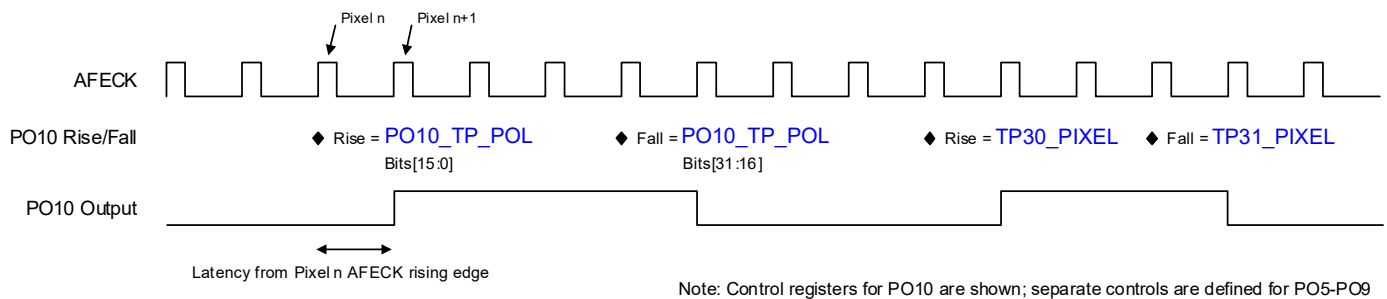


Figure 4-58. Pulse-Output (POn) Configuration—Direct Control

4.8.3 Pulse Waveform Clocks (P_CK_n)

The CS82L44 supports four pulse-waveform clocks, P_CK1–P_CK4. The pulse-waveform clocks can be used to provide timing control signals for external circuits via the respective CLKOUT_n pins (see [Section 4.8.5](#)).

Each clock (P_CK_n) is derived from one of the pulse-output sources, PO0–PO10. The source for each clock is configured using **PCKx_PO_SEL**. See [Section 4.8.2](#) for details of the pulse-output sources.

The P_CK_n timing is aligned to the rising edge of TGCKO. The TGCKO signal is configured using [DLL_TGCKO_RISE](#) to align the rising edge with the applicable DLL tap. The timing constraints defined in [Section 4.8.6](#) must be observed when configuring TGCKO.

Note: There is a latency between the switching point of the POn source and the corresponding P_CK output. The P_CK output toggles at the second TGCKO rising edge following a toggle of the source POn signal.

The P_CK timing is illustrated in [Fig. 4-59](#).

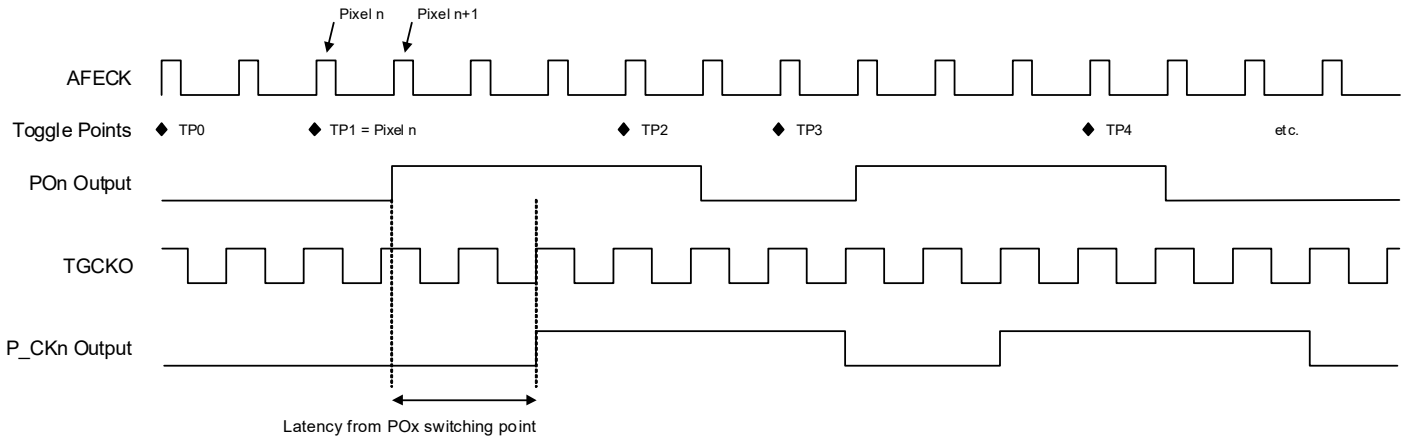


Figure 4-59. Pulse Clock (P_CK) Configuration

The timing of the P_CK_n signals is configured with reference to the TGCKO clock. An additional switching delay can be configured for individual clock outputs using [PCKx_DLY](#) as shown in [Fig. 4-60](#).

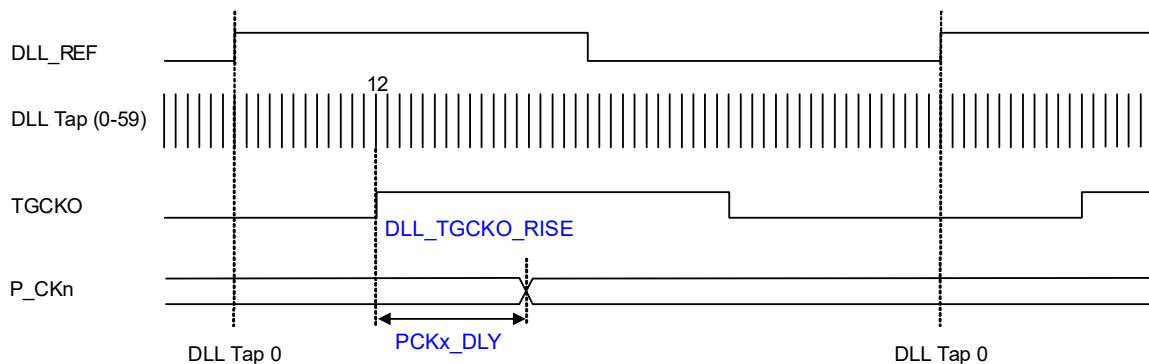


Figure 4-60. Pulse-Clock Switch Timing

4.8.4 High-Speed Clocks (C_CK_n)

The CS82L44 supports four high-speed clocks, C_CK₁–C_CK₄. The high-speed clocks can be used to provide timing control signals for external circuits via the respective CLKOUT_n pins (see [Section 4.8.5](#)).

The high-speed pixel-rate clocks are derived from the DLL. The rising and falling edges of each clock are configured using [DLL_CKx_RISE](#) and [DLL_CKx_FALL](#) to align the respective clock edge with the applicable DLL tap.

The high-speed clock configuration is illustrated in Fig. 4-61. Note that the C_CK pulse can be asserted across the Tap 0 boundary if desired.

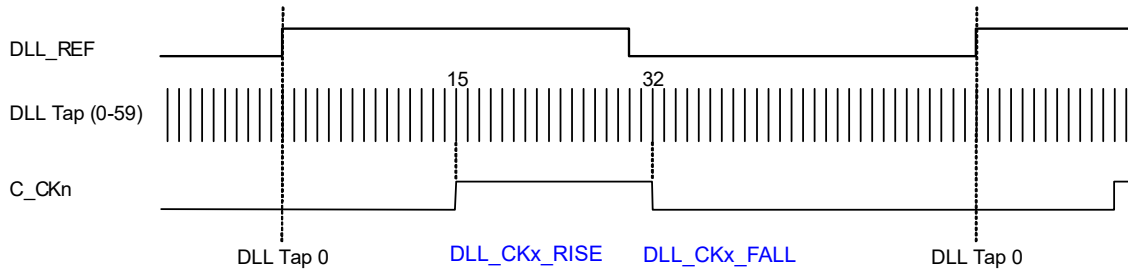


Figure 4-61. High-Speed Clocks (C_CKn)

Configurable masking can be applied to the high-speed clocks—the pixel-rate clock switching is masked through the applicable range of pixel-count values. During the masked periods, the clock signal can be switched to 0 or 1 at any of the defined toggle points TP0–TP31.

- Masking for C_CK1 and C_CK2 is configured using [CK_MASK1_START](#) and [CK_MASK1_END](#). Toggle is configured using [CK_TOG1_TP_POL](#).
- Masking for C_CK3 and C_CK4 is configured using [CK_MASK2_START](#) and [CK_MASK2_END](#). Toggle is configured using [CK_TOG2_TP_POL](#).

The C_CK mask and toggle logic is shown in Fig. 4-62. If the mask is Logic 0, the clock output switches high/low while the toggle control is high; the output is held low while toggle control is low. If the mask is Logic 1, the clock output switches high/low according to the toggle status.

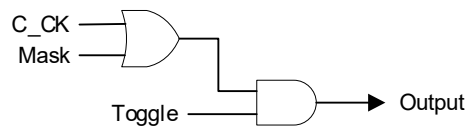


Figure 4-62. C_CK Mask/Toggle Logic

The mask is referenced to the primary or secondary pixel counter using [CK_MASKx_CNT_SEL](#). The toggle is referenced to the primary or secondary pixel counter using [CK_TOGx_CNT_SEL](#). The toggle points (TPn) associated with each counter are configured independently as described in [Section 4.8.1](#).

Note: If the toggle is referenced to the primary pixel counter, the [CK_TOGx_TP_POL](#) bits 0–31 define the logic level at toggle points TP0–TP31 respectively. If the toggle is referenced to the secondary pixel counter, the mapping of the [CK_TOGx_TP_POL](#) bits to the toggle points is offset by a number of bits equal to the [TP_SEC_OFFSET](#) value.

For example, if [TP_SEC_OFFSET](#) = 10, toggle points TP10–TP31 are associated with the secondary counter. In this case, if the secondary counter is selected, Bit 0 of [CK_TOGx_TP_POL](#) defines the logic level at TP10, Bit 1 of [CK_TOGx_TP_POL](#) defines the logic level at TP11, etc.

The initial logic level (when the selected counter is reset) is configured using [CK_TOGx_INIT_LVL](#) for each toggle source. The level can be unchanged from the previous counter cycle, or can be set equal to the logic level of the first toggle point.

If a mask/toggle is referenced to the secondary pixel counter, the respective function can be selectively enabled for individual sequence states using [CK_MASKx_SEQ_SEL](#) and [CK_TOGx_SEQ_SEL](#). Each bit within these fields enables the mask/toggle function for the corresponding state.

If the mask function is disabled, the clock output switches high/low while the toggle control is high; the output is held low while toggle control is low. If the toggle function is disabled, the output is held low throughout the respective state.

There is a latency between the **CK_MASKx_START** pixel count and the start of the mask period. Similarly, there is a latency between the **CK_MASKx_END** pixel count and the end of the mask period. The mask timing has a dependency on the AFECK and TGCKO clocks (see [Section 4.6](#) and [Section 4.8.3](#)).

The following definitions assume the C_{CK} is configured to mask at Pixel *n*:

- If the rising edge of C_{CK} occurs before the rising edge of TGCKO (each measured from the rising edge of AFECK), the mask begins at the fourth C_{CK} rising edge following the Pixel *n* AFECK rising edge, as shown in [Fig. 4-63](#).

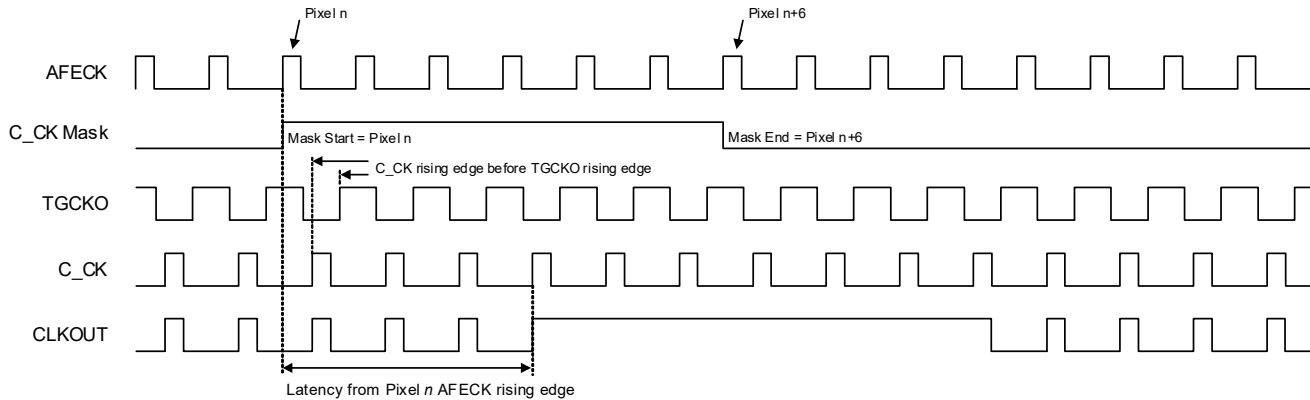


Figure 4-63. Clock Mask Timing—C_{CK} before TGCKO

- If the rising edge of C_{CK} occurs after the rising edge of TGCKO (each measured from the rising edge of AFECK), the mask is effective from the third C_{CK} rising edge following the Pixel *n* AFECK rising edge, as shown in [Fig. 4-64](#).

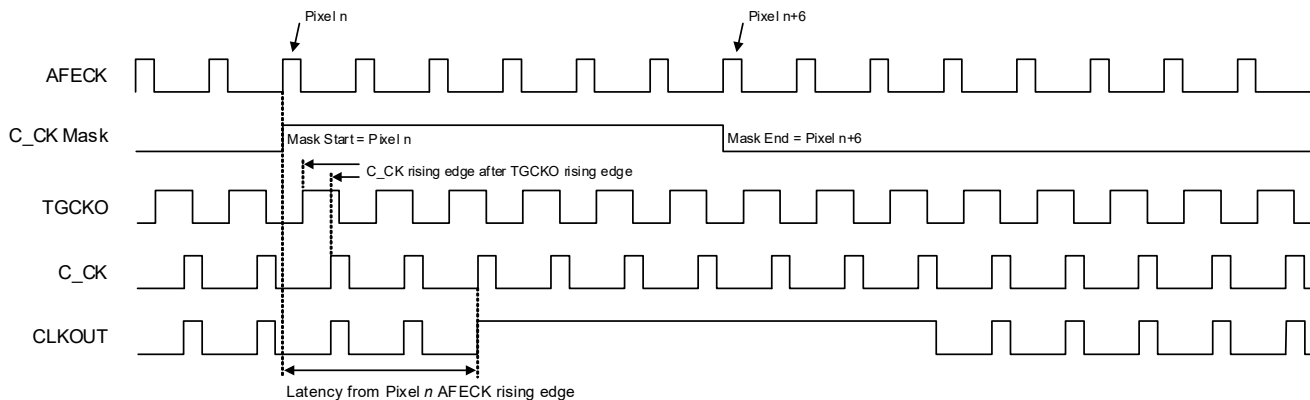


Figure 4-64. Clock Mask Timing—C_{CK} after TGCKO

If any toggle points (TP_n) are defined within the mask period, the C_{CK} output switches to the logic level defined by the corresponding bit within **CK_TOGx_TP_POL**. The toggle timing is aligned to the rising edge of the AFECK; the latency is as described in [Section 4.8.3](#) for the P_{CKn} pulse-output sources.

Note that the toggle configuration (**CK_TOGx_TP_POL**) must be set to Logic 1 throughout the unmasked pixel ranges. See [Section 4.8.1](#) for details of toggle points TP₀–TP₃₁.

4.8.4.1 Clock Divider

A divider can be enabled on the high-speed clocks using `DLL_CKx_DIV`. If the divider is enabled, the respective `C_CK` rate is divided by two. The timing of the divided clock is configured using `DLL_CKx_RISE` to align the clock edges with the applicable DLL tap as illustrated in [Fig. 4-65](#). Note the `DLL_CKx_FALL` field is not used in this case.

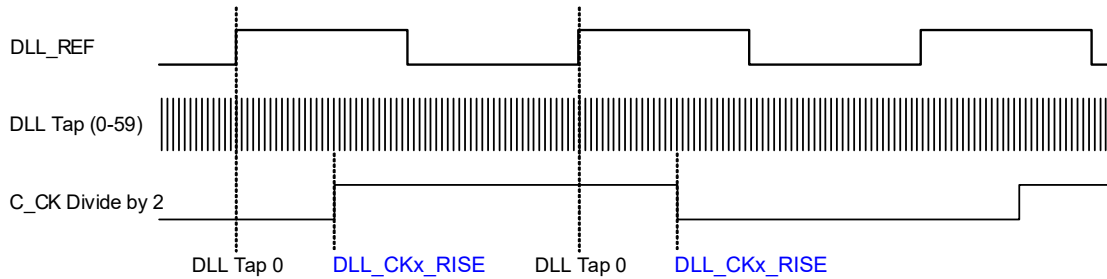


Figure 4-65. Clock Division

The divided clock toggles at half the `C_CK` rate—one cycle of the divided clock corresponds to two pixel-counter values. The phase relationship of the divided clock to the pixel counter is configured using the `P_CK` (pulse-waveform) clocks.

If the divider is enabled for `C_CKx`, the corresponding `P_CKx` signal provides a reset control for the divided `C_CKx`. Phase control is achieved by configuring `P_CKx` to hold the clock low (reset) for one or more pixels, and then enable the divided clock in the required phase.

The `P_CKx` waveform is derived from a `PO` (pulse-output) source as described in [Section 4.8.3](#). The `PO` source is configurable as described in [Section 4.8.2](#).

Phase control of the divided `C_CK` is illustrated in [Fig. 4-66](#). If `P_CK` is high, the divided `C_CK` is held low; if `P_CK` is low, the divided `C_CK` is enabled.

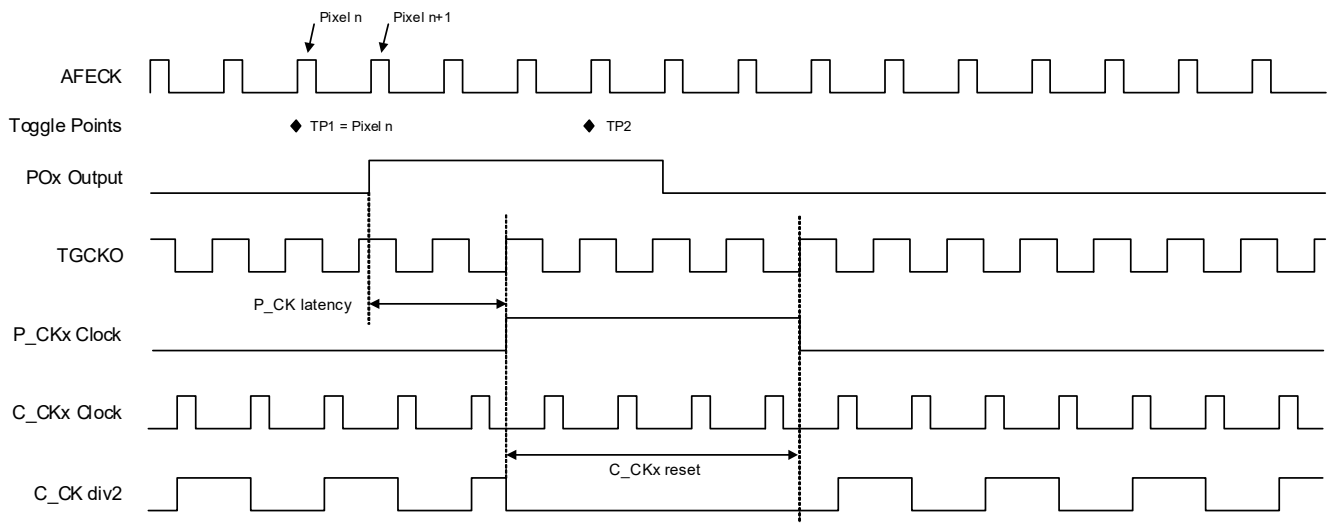


Figure 4-66. Clock Divider Phase Control

Mask and toggle controls are supported on the divided `C_CK`, as described in [Section 4.8.4](#).

4.8.5 Clock Output Configuration

The CS82L44 supports external clock output on the `CLKOUT1`–`CLKOUT4` pins. These are multifunction pins, which must be configured for the respective `CLKOUTn` function as described in [Section 4.11](#).

The `CLKOUT1`–`4` pins can be configured to output the respective high-speed clock `C_CKn` (see [Section 4.8.4](#)), or the respective pulse-waveform clock `P_CKn` (see [Section 4.8.3](#)). The applicable source is configured using `CLKOUTx_SRC`.

The clock outputs are enabled using `CLKOUTx_EN`. Signal inversion is available on each output using `CLKOUTx_POL`. The clock-output configuration is illustrated in Fig. 4-67.

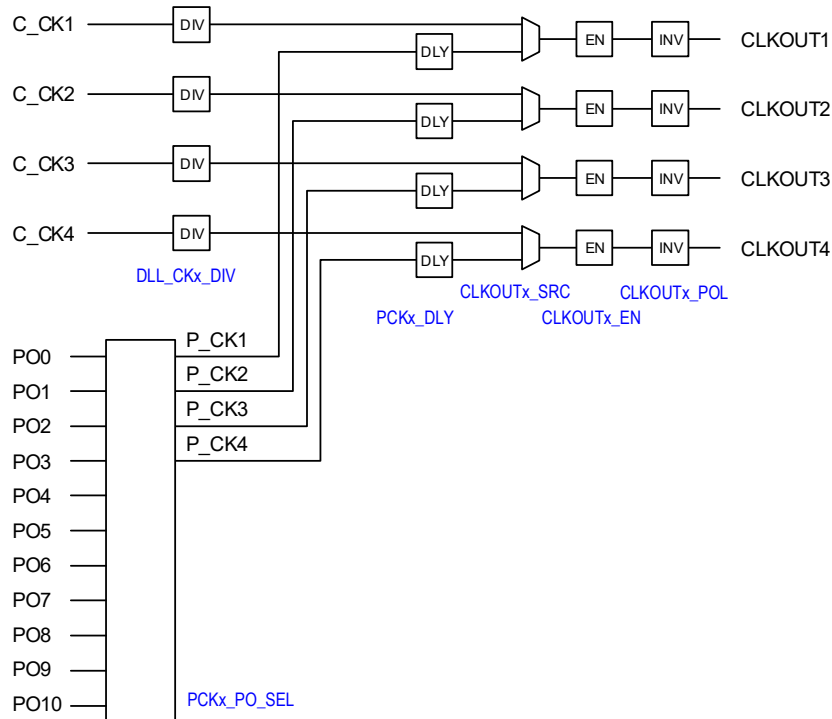


Figure 4-67. Clock Output Configuration

4.8.6 Clocking Configuration Constraints

The configuration of the high-speed clocks (`C_CKn`), sample-timing signals (`VSMP`, `RSMP`, and `AFECK`), and the `TGCKO` clock requires careful consideration to ensure the applicable constraints are observed.

The `C_CKn` clocks are used as control signals for the external sensor; they are configured as described in Section 4.8.4.

The `VSMP`, `RSMP`, and `AFECK` signals are used to control the sample timing and ADC conversion process on the video input signal. These signals are configured as described in Section 4.6.1; timing specifications are noted in Table 3-11. They can also be monitored externally as described in Section 4.12.

The `TGCKO` clock controls the timing of the pixel-counter increment and the pulse-output waveform functions. The `TGCKO` clock is configured as described in Section 4.8.3.

The timing constraints are summarized as follows:

- The `VSMP`, `RSMP`, and `AFECK` pulses must not overlap; the minimum duration of each must be observed.
- The `TGCKO` rising edge must not occur within 0–5 Taps after the `AFECK` rising edge.
- The `TGCKO` rising edge must not occur within 0–2 Taps after any `C_CKn` rising edge.

An example configuration is shown in Fig. 4-68. The constraints governing the TGCKO signal are highlighted.

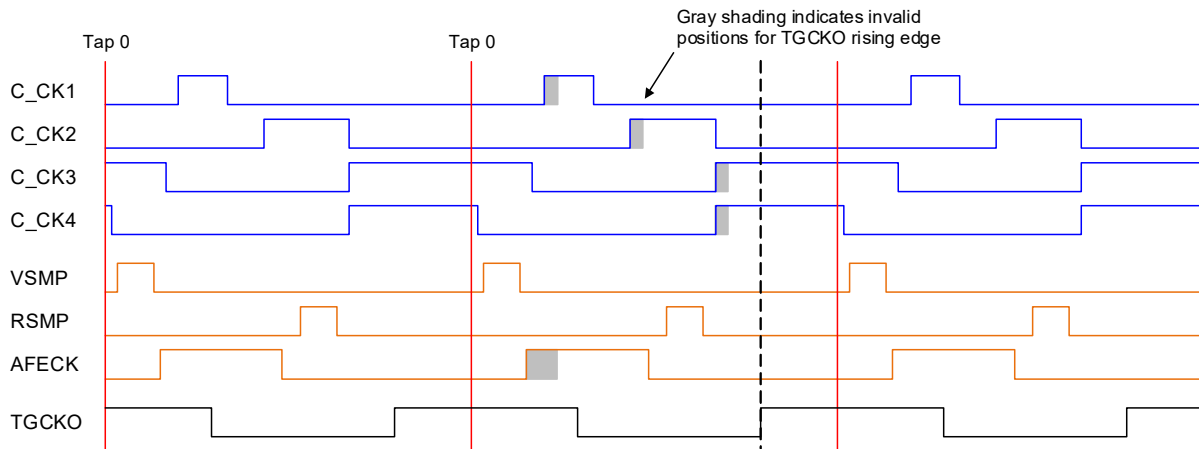


Figure 4-68. Example Clocking Configuration

4.9 LED Driver Control

Three current-sink LED drivers are provided, supporting independently programmable control. The three-channel controller is typically used to drive red, green, and blue LED outputs. White LEDs can also be supported. The LED drivers can be enabled using dedicated hardware pins, or else using pulse waveforms derived from the pixel counter and sequence state.

The LED control functions are enabled using [LEDR_EN](#), [LEDG_EN](#), and [LEDB_EN](#) for the red, green, and blue channels respectively.

The control source for the LED drivers is selected using [LED_CTRL_SRC](#). The selection applies to all LED channels.

- If the hardware pin is selected, the LED is enabled if the respective pin is asserted high (Logic 1). The switching edges are synchronized to the pixel-counter clock in order to reduce asynchronous noise in the system. The LED control inputs are supported on multifunction pins, which must be configured for the respective function as described in [Section 4.11](#).
- If the pulse waveform is selected, the LED is controlled by one of the pulse output sources, PO0–PO10. The applicable pulse source is selected using [LEDx_PO_SEL](#). The POn signals are programmable waveforms that toggle on/off under configurable pixel-counter and sequence-state conditions. See [Section 4.8.2](#) for details of the pulse-output sources.

The output current of each driver is configured using coarse and fine controls. The maximum available output current is configured using the coarse control, [LEDx_COARSE](#). The output current is selected—from zero to the configured maximum—using the fine control, [LEDx_FINE](#). The fine control provides an 8-bit resolution to set the output current between zero and the configured maximum (coarse) level.

Notes: If the sum of the coarse current selections in the active LED channels exceeds the maximum limit (135 mA in typical combinations), the current levels are automatically restricted to a maximum of 45 mA.

The maximum current limit applies to active channels only, i.e., LED drivers that are enabled using [LEDx_EN](#) and by an asserted hardware pin or pulse waveform.

The LED drivers must be disabled before changing the coarse current control. The host should confirm the CS82L44 is in the Idle State (see [Section 4.2](#)) before changing the coarse current control.

When an LED driver is enabled/disabled, or the fine current level is changed, the respective current sink ramps up/down to the configured level. The ramp rate is configurable using [LED_RAMP_TIME](#). If the fine current level is changed while a ramp is in progress, the current sink ramps up/down to the new level.

The ramp rate can be modified using `LED_RAMP_BOOST`, allowing slew rates 2x or 4x faster than the `LED_RAMP_TIME` rate. Some restrictions are applicable on these faster rates, as noted in the register-field description.

The external connections for the LED drivers are illustrated in Fig. 4-69. An external resistor, connected to `ILED_CTRL`, is used to calibrate the output current of the LED drivers.

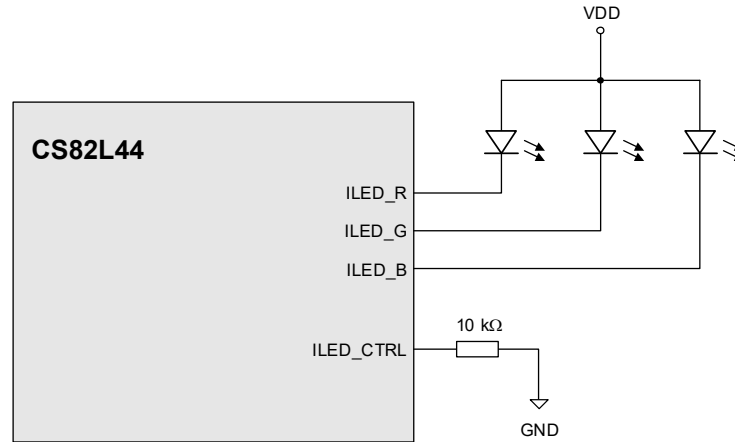


Figure 4-69. LED Output Drivers

The LED drivers are protected in case of fault conditions. Error conditions are indicated using the following control bits:

- `LED_MAX_CURRENT_ERR`—indicates sum of the coarse current levels (in the enabled channels) exceeds the maximum limit. If this bit is set, the fine current levels are automatically restricted to a maximum of 45 mA.
- `LED_CTRL_SHORT_ERR`—indicates a short circuit on the external `ILED_CTRL` resistor.

If a short circuit is detected, the LED drivers are shut down and the CS82L44 enters the Error State. See Section 4.2.1 for further details.

Note there is no specific indication of an open circuit on the external `ILED_CTRL` resistor, but the LED drivers are protected and disabled in this event.

If an LED output pin is shorted to a supply rail, the driver maintains the selected current through the pin, resulting in increased voltage drop across the internal circuits. The current drawn from the supply is protected, but thermal dissipation in the CS82L44 is increased.

4.10 Control Interface

The CS82L44 incorporates a control port, supporting I²C or SPI modes of operation. The CS82L44 is configured by writing to control registers using the control port.

The control port is automatically configured in I²C mode or SPI mode following the first valid I²C/SPI activity detected after power-on. In SPI mode, the CS82L44 supports a number of different protocols, enabling compatibility with a wide variety of host systems.

4.10.1 I²C Interface

The I²C control port is supported using the `I2C_SCL` and `I2C_SDA` pins.

The CS82L44 is a target device on the I²C bus—`SCL` is a clock input, `SDA` is a bidirectional data pin. To allow arbitration of multiple targets (and/or multiple controllers) on the same interface, the CS82L44 transmits Logic 1 by tristating the `SDA` pin, rather than pulling it high. An external pull-up resistor is required to pull the `SDA` line high so that the Logic 1 can be recognized by the controller.

In order to allow many devices to share a single two-wire control bus, every device on the bus has a unique 8-bit target address (this is not the same as the address of each register in the register map). Note that the LSB of the target address is the read/write bit; this bit is set to Logic 1 for read and Logic 0 for write.

The I²C target address is configured using the DSLCT pin as described in [Table 4-7](#).

Table 4-7. I²C Target Address Selection

DSLCT Pin Connection	I ² C Address
Logic 0	0x34 (write), 0x35 (read)
Logic 1	0x36 (write), 0x37 (read)

The host device indicates the start of data transfer with a high-to-low transition on SDA while SCL remains high. This indicates that a device address and subsequent address/data bytes follow. The CS82L44 responds to the start condition and shifts in the next eight bits on SDA (8-bit target address, including read/write bit, MSB first). If the target address received matches the target address of The CS82L44, it responds by pulling SDA low on the next clock pulse (ACK). If the target address is not recognized, the CS82L44 returns to the idle condition and waits for a new start condition.

If the target address matches the target address of the CS82L44, the data transfer continues. The controller indicates the end of data transfer with a low-to-high transition on SDA while SCL remains high. After receiving a complete address and data sequence, the CS82L44 returns to idle and waits for another start condition. If a start or stop condition is detected out of sequence at any point during data transfer (i.e., SDA changes while SCL is high), the device returns to the idle condition.


The I²C interface uses a 16-bit register address and 8-bit data words. Note that the full I²C message protocol also includes a target address, a read/ write bit, and other signaling bits (see [Fig. 4-70](#) and [Fig. 4-71](#)).

The CS82L44 supports the following read and write operations:

- Single write
- Single read
- Multiple write
- Multiple read

Continuous (multiple) read and write modes allow register operations to be scheduled faster than is possible with single register operations. In these modes, the CS82L44 automatically increments the register address after each data word. Successive data words can be input/output in turn (see [Fig. 4-74](#) and [Fig. 4-75](#)).


The I²C protocol for a single, 8-bit register write operation is shown in [Fig. 4-70](#).

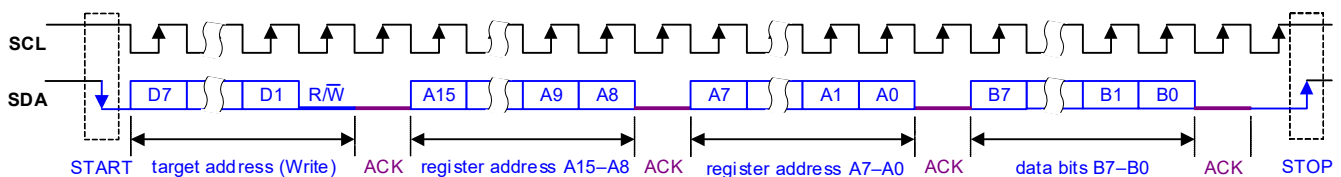

Note: The SDA pin is used as input for the control register address and data; SDA

Figure 4-70. Control Interface I²C Register Write

The I²C protocol for a single, 8-bit register read operation is shown in Fig. 4-71.

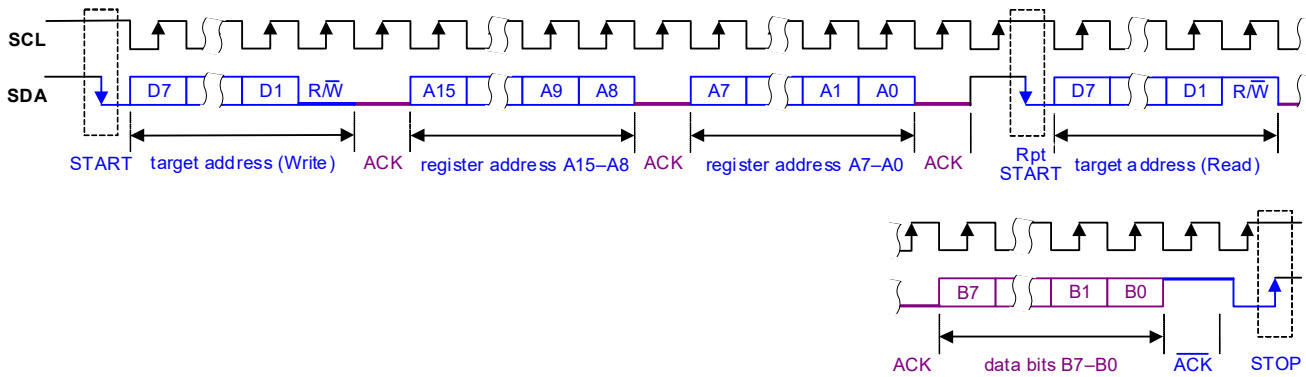

Note: The SDA pin is driven by both the controller and target devices in turn to transfer target address, register address, data and ACK responses

Figure 4-71. Control Interface I²C Register Read

The I²C interface also supports other register operations; the interface protocol for these operations is shown in Fig. 4-72 through Fig. 4-75. The terminology used in the following figures is detailed in Table 4-8.

Table 4-8. Control Interface (I²C) Terminology

Terminology	Description
S	Start condition
Sr	Repeated start
A	Acknowledge (SDA low)
\bar{A}	No Acknowledge (SDA high)
P	Stop condition
$\overline{R/W}$	Read/not Write: 0 = Write, 1 = Read
[White field]	Data flow from bus controller to CS82L44
[Gray field]	Data from CS82L44 to bus controller

Fig. 4-72 shows a single register write to a specified address.

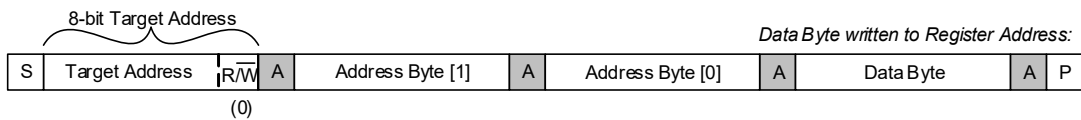


Figure 4-72. Single-Register Write to Specified Address

Fig. 4-73 shows a single register read from a specified address.




Figure 4-73. Single-Register Read from Specified Address

Fig. 4-74 shows a multiple register write to a specified address.

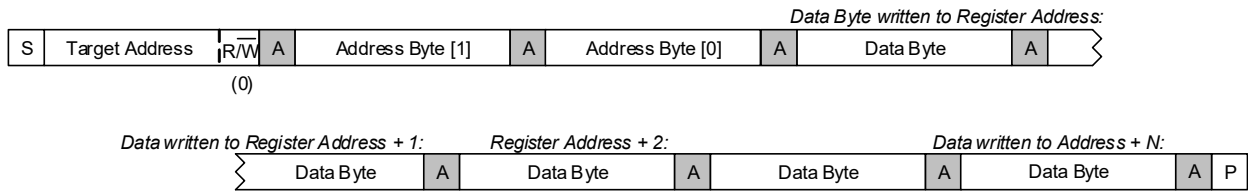


Figure 4-74. Multiple-Register Write to Specified Address

Fig. 4-75 shows a multiple register read from a specified address.

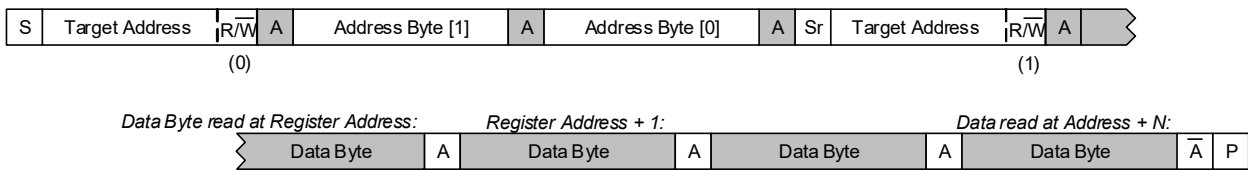


Figure 4-75. Multiple-Register Read from Specified Address

4.10.2 SPI Interface

The SPI interface is supported using the $\overline{\text{SPI_CS}}$, SPI_SCK, SPI_SDI, and SPI_SDO pins.

The $\overline{\text{SPI_CS}}$ pin provides the chip-select input (active low). Clocking for the input/output data is supported using SPI_SCK.

The SDI (data-input) pin supports the following behavior:

- In write operations ($R/W = 0$), the SDI pin input is driven by the controlling device.
- In read operations ($R/W = 1$), the SDI pin is ignored following receipt of the valid register address.

The SDO (data-output) pin supports the following behavior:

- If $\overline{\text{CS}}$ is asserted (Logic 0), the SDO output is actively driven when outputting data and is high impedance at other times. If $\overline{\text{CS}}$ is not asserted, the SDO output is high impedance.
- The high-impedance state of the SDO output allows the pin to be shared with other peripheral devices.
- The output (SDO) data bit is available to the host device at the rising edge of SCK. See Table 3-21 for timing information.

In SPI Mode, the CS82L44 can be configured for different protocols, enabling compatibility with a wide variety of host systems. The SPI Mode is configured using the DSLCT pin as described in Table 4-9.

Table 4-9. SPI Mode Selection

DSLCT Pin Configuration		SPI Mode	Description
Pull-up to VDD	0 Ω	Flat Mode 0	2-bit chip select, 13-bit register address, 8-bit data. Device responds to read/write access if chip select = 00.
	4.7 k Ω	Flat Mode 1	2-bit chip select, 13-bit register address, 8-bit data. Device responds to read/write access if chip select = 01.
Pull-down to GND	0 Ω	Banked Mode	7-bit register address, 8-bit data. Registers arranged in Bank 0–7; current bank selected using BANK.

Note: The pull-up resistor must be within 1% of the specified value

4.10.2.1 Flat Mode

In Flat Mode, the SPI interface uses a 2-bit chip select, 13-bit register address, and 8-bit data words. A read/write bit is also used to select the transaction type.

The chip-select bits allow the host to control more than one CS82L44 over a shared control interface. The SPI read/write command is valid if the chip-select bits match the configured mode (see [Table 4-9](#)).

- In Flat Mode 0, the SPI command is valid if CS[1:0] = 00.
- In Flat Mode 1, the SPI command is valid if CS[1:0] = 01.

Regardless of which mode the device is configured in, a write transaction is also valid if CS[1:0] = 10 or 11. This allows the host to write to more than one device simultaneously. Note that a read transaction is not valid under these conditions, and generates no response.

Continuous read and write modes enable multiple register operations to be scheduled faster than is possible with single register operations. In these modes, the CS82L44 automatically increments the register address at the end of each data word, for as long as $\overline{\text{CS}}$ is held low and SCK is toggled. Successive data words can be input/output every 8 clock cycles.

[Fig. 4-76](#) shows a single register write to a specified address.

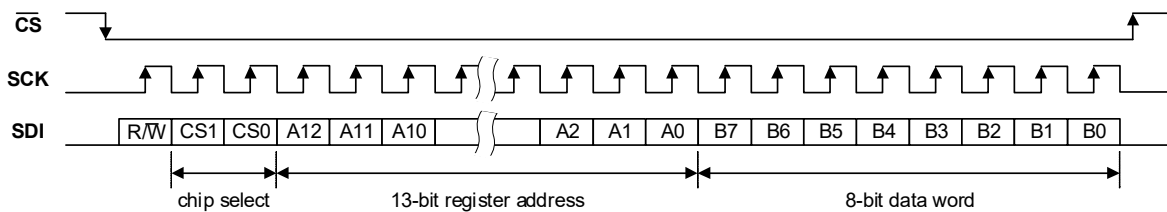


Figure 4-76. Control Interface SPI Register Write—Flat Mode

[Fig. 4-77](#) shows a single register read from a specified address.

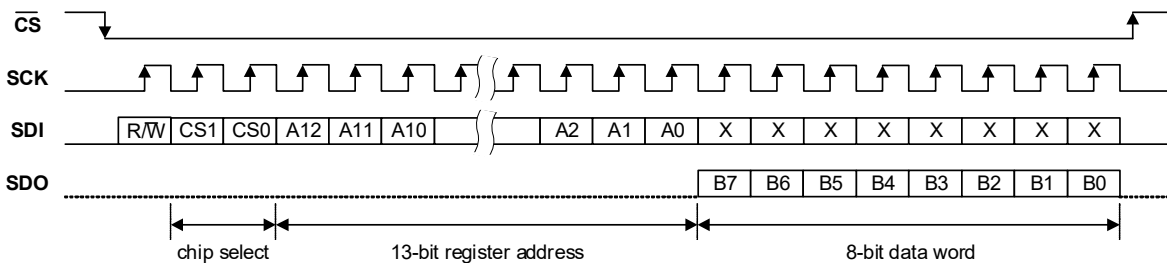


Figure 4-77. Control Interface SPI Register Read—Flat Mode

4.10.2.2 Banked Mode

In Banked Mode, the SPI interface uses a 7-bit register address and 8-bit data words. A read/write bit is also used to select the transaction type.

The register map is arranged in 8 banks, each containing 128 registers. By selecting different banks, all of the CS82L44 control registers can be accessed using the 7-bit register address.

The current bank is configured using **BANK**. This field is supported at register address 0x00 in all banks, and can therefore be accessed in the same way regardless of which bank is currently selected.

Note: An overview of the register map in Banked Mode is described in [Section 6](#).

Continuous read and write modes enable multiple register operations to be scheduled faster than is possible with single register operations. In these modes, the CS82L44 automatically increments the register address at the end of each data word, for as long as $\overline{\text{CS}}$ is held low and SCK is toggled. Successive data words can be input/output every 8 clock cycles.

Fig. 4-78 shows a single register write to a specified address.

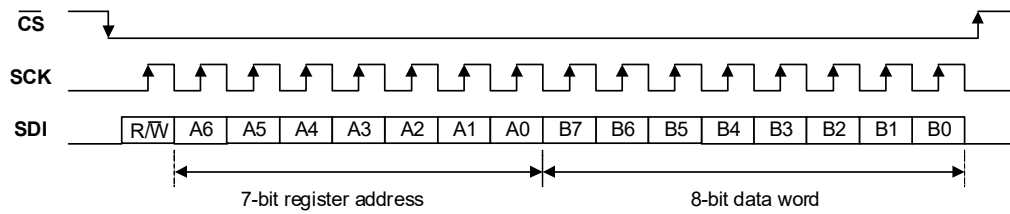


Figure 4-78. Control Interface SPI Register Write—Banked Mode

Fig. 4-79 shows a single register read from a specified address.

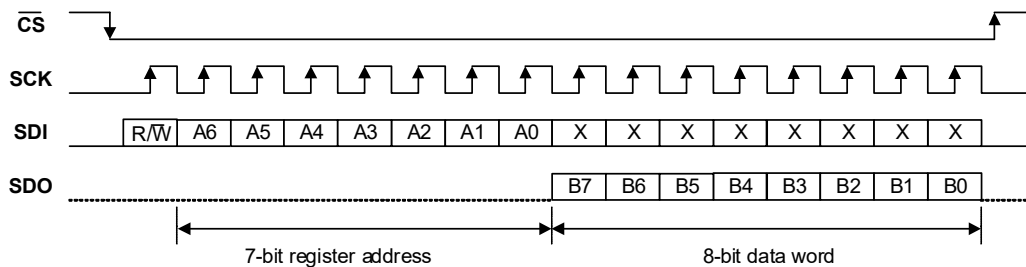


Figure 4-79. Control Interface SPI Register Read—Banked Mode

4.10.2.3 Shared Bus Mode

The CS82L44 can be configured in Shared Bus Mode, where the SPI control interface and the digital data output are supported on shared pins. This can be used to reduce the number of I/O connections to the host interface. Note that Shared Bus Mode is supported for CMOS data-output formats only (see [Section 4.5](#)).

In Shared Bus Mode, the \overline{DOUTn} data outputs are disabled (Hi-Z) whenever $\overline{SPI_CS}$ is asserted. The SPI_SDO output is disabled (Hi-Z) whenever $\overline{SPI_CS}$ is not asserted. This allows the two interfaces to be connected together and used in turn.

If required, the GPI12 input can be used to disable the \overline{DOUTn} data outputs (Hi-Z). This can be used to ensure there is no bus contention, by disabling the data outputs before $\overline{SPI_CS}$ is asserted and re-enabling them after the SPI transactions are complete.

Typical connections for Shared Bus Mode are shown in Fig. 4-80.

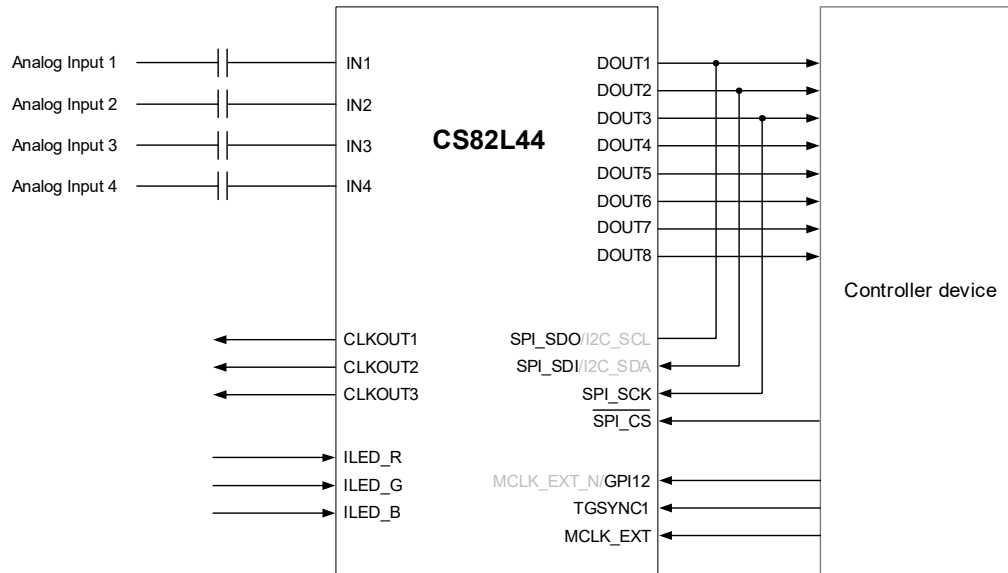


Figure 4-80. Shared Bus Mode

Shared Bus Mode is enabled using `SHARED_BUS_MODE`. If this bit is set, the `DOUTn` pins are controlled to allow these pins to be shared with the SPI control interface. The `DOUTn` pins are Hi-Z when `SPI_CS` is asserted (Logic 0), allowing the host to access the control registers using the SPI interface.

The GPI12 input can be configured to control the data-output pins by setting `GPI12_DOUT_CTRL`. If this bit is set, the data-output pins are enabled by applying a Logic 1 to the GPI12 input; the pins are disabled (Hi-Z) by applying a Logic 0. The GPI12 function is supported on the `MCLK_EXT_N` pin, which must be configured for general-purpose input as described in Section 4.11.

In Shared Bus Mode, the host must ensure the `DOUTn` pins are Hi-Z before driving the shared signal lines. The host must cease driving the shared signal lines before the `DOUTn` pins are driven. Timing specifications are shown in Table 3-21.

The following operational constraints must be observed to avoid contention between the `SPI_SDO` and `DOUTn` outputs:

- In the Idle State, SPI read and SPI write operations are supported.
- In the Ready State, SPI write operations are supported. SPI read operations are supported if `DOUT_READY_EN` is cleared (see Section 4.2 for further information).
- In the Active State, SPI write operations are supported. SPI read operations are not supported.

In a typical application, the host configures the device in the Idle State (see Section 4.2). When the host selects the Active State, the data output commences after `SPI_CS` is deasserted high (and GPI12 is asserted high, if applicable). The data output ceases when `SPI_CS` is asserted low (or GPI12 is deasserted low, if applicable).

Note: The selected data-output format is enabled by default in the Ready State (the data bits and status flags are held at 0). If the SPI and DOUT pins are connected on the PCB, the Shared Bus Mode must be enabled prior to selecting the Ready State in order to avoid bus contention.

The `DOUTn` pins can be shared with the `SPI_SDI`, `SPI_SDO`, and `SPI_SCK` pins in any configuration; the connections shown in Fig. 4-80 are an example configuration only.

4.11 Pin Configuration and General-Purpose Input/Output

Many of the digital input/output functions are supported on multifunction pins. These pins are used for sample/frame timing control, clock outputs, and LED control inputs. General-purpose input/output is also supported.

4.11.1 Pin Function Select

The multifunction pins are configured for the required function using the control fields described in [Table 4-10](#).

Table 4-10. Pin Function Select

Pin Name	Control Field	Selection	Reference
TGSYNC1/VSMP_EXT	TGSYNC1_VSMP_FN	00 = VSMP input 01 = TGSYNC1 input ¹ 10 = Not used (Hi-Z) 11 = TGSYNC output	Section 4.6.2 , Section 4.6.3 Section 4.7.3 — Section 4.7.2
CLKOUT1/LEDR_EN/ TGSYNC2	CLKOUT1_FN	00 = Red LED control input ¹ 01 = TGSYNC2 input ¹ 10 = General-purpose input/output 1 11 = CLKOUT1	Section 4.9 Section 4.7.3 Section 4.11.2 Section 4.8.5
CLKOUT2/LEDG_EN/ LEDSTART	CLKOUT2_FN	00 = Green LED control input ¹ 01 = LEDSTART ¹ 10 = General-purpose input/output 2 11 = CLKOUT2	Section 4.9 Section 4.7.3 Section 4.11.2 Section 4.8.5
CLKOUT3/LEDB_EN/ RSMP_EXT	CLKOUT3_FN	000 = Blue LED control input ¹ 001 = RSMP input ² 010 = General-purpose input/output 3 011 = CLKOUT3 100 = Monitor/test output 101–111 = Reserved	Section 4.9 Section 4.6.2 Section 4.11.2 Section 4.8.5 Section 4.12 —
CLKOUT4	CLKOUT4_FN	0 = General-purpose input/output 4 ^[1] 1 = CLKOUT4	Section 4.11.2 Section 4.8.5
MCLK_EXT_N	MCLK_EXT_LVDS	0 = General-purpose input 12 ^[3] 1 = LVDS clock input	Section 4.11.2 Section 4.3

1. The TGSYNC, LED-enable, LEDSTART, and GPIO4 input can also be used to control the MCLK mask, as described in [Section 4.3.2](#).

2. The RSMP input can also be used to control the input clamp, as described in [Section 4.4.3](#).

3. The GPI12 input can also be used to control the DOUT pins, as described in [Section 4.10.2.3](#).

4.11.2 General Purpose Input/Output

The CS82L44 supports general-purpose (GP) input/output on selected digital I/O pins. The input function can be used to allow readback of hardware signals from other devices. The output function can be used to control other devices.

The general-purpose inputs are multiplexed with other pin functions. Each pin is configured for GP input/output using the respective `x_FN` field as noted in [Table 4-10](#).

The general-purpose I/O functions are configured as input by default. The output function is enabled by setting the respective `GPx_DIR` bit. Note that GP output is supported on GPIO1–4 only.

- If a pin is configured for GP input, the logic level is indicated using `GPx_IN_STS`.
- If a pin is configured for GP output, the output level is controlled using `GPx_OUT_LVL`.

4.11.3 Digital I/O Pin Configuration

The digital I/O pins are configurable to support flexible integration with other devices. Configurable options are provided for all of the digital I/O listed in [Table 1-1](#)—this includes MCLK input, data output, clock output, and the multifunction pins listed in [Table 4-10](#).

Integrated pull-up and pull-down resistors are configured and enabled using the respective `x_PULL` fields. A bus-keeper function can also be enabled using the `x_PULL` fields; the bus-keeper holds the logic level unchanged whenever the pin is undriven (e.g., if the signal is tristated).

Note: The pull-up and pull-down resistors are valid for CMOS input/output only; if a pin is operating in LVDS mode, the pull resistors must be disabled using the respective `x_PULL` fields.

The drive strength for CMOS digital output is configured using `x_DRV_STR`. The drive strength for LVDS output is configured using `x_TXDRV`.

The input function on each pin is enabled using `x_IE`. This bit must be set to support input functions on the respective pin.

The pins can be configured in a high-impedance state using `x_HIZ_EN`. This option is supported for CMOS input/output only; the field has no effect on any pin configured for LVDS data output. Note that, to configure the high-impedance state, the pull-up and pull-down resistors must also be disabled using `x_PULL`.

The voltage reference for LVDS input/output is selectable using `LVDS_VREF_SEL`.

An LVDS termination resistor can be enabled on the MCLK input by setting `MCLK_LVDS_RT_EN`.

4.12 Debug Monitor Output

The MON output allows internal clock signals to be monitored externally for timing set-up and debug purposes. The MON function is supported on a multifunction pin, which must be configured for monitor output as described in [Section 4.11](#).

The MON output is configured using `MON_SEL`. The following output signals are supported:

- VSMP—video sample control
- RSMP—reset sample control
- AFECK—ADC sample/conversion control
- Data clock—output formatter clock
In TG Mode, the data clock equates to DCLKOUT; in External Mode, the data clock equates to MCLK.
- PLL1—frequency synthesizer output

If using the monitor output to configure the signal timing for an application, it is recommended to take account of the propagation delay from the internal signal to the monitor output. The propagation delay is defined in [Table 3-19](#).

4.13 Device ID

The device ID, and other associated data, can be read from the control fields listed in [Table 4-11](#).

Table 4-11. Device ID

Label	Description
DEVID	Device ID
AREVID	All-layer device revision
MTLREVID	Metal-layer device revision
RELID	Software device revision
DESCRIM	Device identifier (readback value 0xC)

5 Applications

5.1 Digital Output Definitions

5.1.1 LVDS Output Format

The LVDS output formats are defined in this section. See [Section 4.5](#) for details of the CS82L44 output formats.

LVDS Format 27 is defined in [Fig. 5-1](#).

Format ID: 27															
Number of channels: 4															
Bits per channel: 16															
Clock cycles per pixel: 4															
Number of data pairs: 3															
DOUT3	S0	S1	S2	CH1[0]	CH1[1]	CH1[2]	CH1[3]	DOUT3	S0	S1	S2	CH2[0]	CH2[1]	CH2[2]	CH2[3]
DOUT2	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH1[10]	DOUT2	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]	CH2[10]
DOUT1	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	S3	S4	DOUT1	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]	S3	S4
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 1								Data Block 2							
DOUT3	S0	S1	S2	CH3[0]	CH3[1]	CH3[2]	CH3[3]	DOUT3	S0	S1	S2	CH4[0]	CH4[1]	CH4[2]	CH4[3]
DOUT2	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]	CH3[10]	DOUT2	CH4[4]	CH4[5]	CH4[6]	CH4[7]	CH4[8]	CH4[9]	CH4[10]
DOUT1	CH3[11]	CH3[12]	CH3[13]	CH3[14]	CH3[15]	S3	S4	DOUT1	CH4[11]	CH4[12]	CH4[13]	CH4[14]	CH4[15]	S3	S4
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 3								Data Block 4							

Figure 5-1. LVDS Format 27

LVDS Format 26 is defined in [Fig. 5-2](#).

Format ID: 26															
Number of channels: 3															
Bits per channel: 16															
Clock cycles per pixel: 3															
Number of data pairs: 3															
DOUT3	S0	S1	S2	CH1[0]	CH1[1]	CH1[2]	CH1[3]	DOUT3	S0	S1	S2	CH2[0]	CH2[1]	CH2[2]	CH2[3]
DOUT2	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH1[10]	DOUT2	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]	CH2[10]
DOUT1	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	S3	S4	DOUT1	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]	S3	S4
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 1								Data Block 2							
DOUT3	S0	S1	S2	CH3[0]	CH3[1]	CH3[2]	CH3[3]	DOUT3	S0	S1	S2	CH3[0]	CH3[1]	CH3[2]	CH3[3]
DOUT2	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]	CH3[10]	DOUT2	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]	CH3[10]
DOUT1	CH3[11]	CH3[12]	CH3[13]	CH3[14]	CH3[15]	S3	S4	DOUT1	CH3[11]	CH3[12]	CH3[13]	CH3[14]	CH3[15]	S3	S4
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 3								Data Block 3							

Figure 5-2. LVDS Format 26

LVDS Format 25 is defined in [Fig. 5-3](#).

Format ID: 25															
Number of channels: 2															
Bits per channel: 16															
Clock cycles per pixel: 2															
Number of data pairs: 3															
DOUT3	S0	S1	S2	CH1[0]	CH1[1]	CH1[2]	CH1[3]	DOUT3	S0	S1	S2	CH2[0]	CH2[1]	CH2[2]	CH2[3]
DOUT2	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH1[10]	DOUT2	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]	CH2[10]
DOUT1	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	S3	S4	DOUT1	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]	S3	S4
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 1								Data Block 2							

Figure 5-3. LVDS Format 25

LVDS Format 31 is defined in Fig. 5-4.

Format ID: 31															
Number of channels: 4															
Bits per channel: 10															
Clock cycles per pixel: 2															
Number of data pairs: 3															
DOUT3	S0	CH1[0]	CH1[1]	CH1[2]	CH1[3]	CH1[4]	CH1[5]	DOUT3	S0	CH3[0]	CH3[1]	CH3[2]	CH3[3]	CH3[4]	CH3[5]
DOUT2	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH2[0]	CH2[1]	CH2[2]	DOUT2	CH3[6]	CH3[7]	CH3[8]	CH3[9]	CH4[0]	CH4[1]	CH4[2]
DOUT1	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]	DOUT1	CH4[3]	CH4[4]	CH4[5]	CH4[6]	CH4[7]	CH4[8]	CH4[9]
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 1								Data Block 2							

Figure 5-4. LVDS Format 31

LVDS Format 30 is defined in Fig. 5-5.

Format ID: 30															
Number of channels: 3															
Bits per channel: 10															
Clock cycles per pixel: 1.5 (3 clock cycles per 2 pixels)															
Number of data pairs: 3															
DOUT3	S0	CH3[0]	CH3[1]	CH3[2]	CH3[3]	CH3[4]	CH3[5]	DOUT3	S0	CH2[0]	CH2[1]	CH2[2]	CH2[3]	CH2[4]	CH2[5]
DOUT2	CH3[6]	CH3[7]	CH3[8]	CH3[9]	CH1[0]	CH1[1]	CH1[2]	DOUT2	CH2[6]	CH2[7]	CH2[8]	CH2[9]	CH3[0]	CH3[1]	CH3[2]
DOUT1	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	DOUT1	CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 2								Data Block 3							

Figure 5-5. LVDS Format 30

LVDS Format 29 is defined in Fig. 5-6.

Format ID: 29															
Number of channels: 2															
Bits per channel: 10															
Clock cycles per pixel: 1															
Number of data pairs: 3															
DOUT3	S0	CH1[0]	CH1[1]	CH1[2]	CH1[3]	CH1[4]	CH1[5]	DOUT3	S0	CH1[0]	CH1[1]	CH1[2]	CH1[3]	CH1[4]	CH1[5]
DOUT2	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH2[0]	CH2[1]	CH2[2]	DOUT2	CH1[6]	CH1[7]	CH1[8]	CH1[9]	CH2[0]	CH2[1]	CH2[2]
DOUT1	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]	DOUT1	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H

Figure 5-6. LVDS Format 29

LVDS Format 35 is defined in Fig. 5-7.

Format ID: 35															
Number of channels: 4															
Bits per channel: 16															
Clock cycles per pixel: 4															
Number of data pairs: 3															
DOUT3	CH1[9]	CH1[10]	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	DOUT3	CH2[9]	CH2[10]	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]
DOUT2	CH1[2]	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	DOUT2	CH2[2]	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]
DOUT1	S0	S1	S2	S3	S4	CH1[0]	CH1[1]	DOUT1	S0	S1	S2	S3	S4	CH2[0]	CH2[1]
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 1								Data Block 2							
DOUT3	CH3[9]	CH3[10]	CH3[11]	CH3[12]	CH3[13]	CH3[14]	CH3[15]	DOUT3	CH4[9]	CH4[10]	CH4[11]	CH4[12]	CH4[13]	CH4[14]	CH4[15]
DOUT2	CH3[2]	CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	DOUT2	CH4[2]	CH4[3]	CH4[4]	CH4[5]	CH4[6]	CH4[7]	CH4[8]
DOUT1	S0	S1	S2	S3	S4	CH3[0]	CH3[1]	DOUT1	S0	S1	S2	S3	S4	CH4[0]	CH4[1]
DCLKOUT	H	H	L	L	L	H	H	DCLKOUT	H	H	L	L	L	H	H
Data Block 3								Data Block 4							

Figure 5-7. LVDS Format 35

LVDS Format 34 is defined in [Fig. 5-8](#).

Format ID: 34 Number of channels: 3 Bits per channel: 16 Clock cycles per pixel: 3 Number of data pairs: 3								<table border="1"> <tr><td>DOUT3</td><td>CH1[9]</td><td>CH1[10]</td><td>CH1[11]</td><td>CH1[12]</td><td>CH1[13]</td><td>CH1[14]</td><td>CH1[15]</td></tr> <tr><td>DOUT2</td><td>CH1[2]</td><td>CH1[3]</td><td>CH1[4]</td><td>CH1[5]</td><td>CH1[6]</td><td>CH1[7]</td><td>CH1[8]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH1[0]</td><td>CH1[1]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 1</p> <table border="1"> <tr><td>DOUT3</td><td>CH2[9]</td><td>CH2[10]</td><td>CH2[11]</td><td>CH2[12]</td><td>CH2[13]</td><td>CH2[14]</td><td>CH2[15]</td></tr> <tr><td>DOUT2</td><td>CH2[2]</td><td>CH2[3]</td><td>CH2[4]</td><td>CH2[5]</td><td>CH2[6]</td><td>CH2[7]</td><td>CH2[8]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH2[0]</td><td>CH2[1]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 2</p> <table border="1"> <tr><td>DOUT3</td><td>CH3[9]</td><td>CH3[10]</td><td>CH3[11]</td><td>CH3[12]</td><td>CH3[13]</td><td>CH3[14]</td><td>CH3[15]</td></tr> <tr><td>DOUT2</td><td>CH3[2]</td><td>CH3[3]</td><td>CH3[4]</td><td>CH3[5]</td><td>CH3[6]</td><td>CH3[7]</td><td>CH3[8]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH3[0]</td><td>CH3[1]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 3</p>								DOUT3	CH1[9]	CH1[10]	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	DOUT2	CH1[2]	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	DOUT1	S0	S1	S2	S3	S4	CH1[0]	CH1[1]	DCLKOUT	H	H	L	L	L	H	H	DOUT3	CH2[9]	CH2[10]	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]	DOUT2	CH2[2]	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	DOUT1	S0	S1	S2	S3	S4	CH2[0]	CH2[1]	DCLKOUT	H	H	L	L	L	H	H	DOUT3	CH3[9]	CH3[10]	CH3[11]	CH3[12]	CH3[13]	CH3[14]	CH3[15]	DOUT2	CH3[2]	CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	DOUT1	S0	S1	S2	S3	S4	CH3[0]	CH3[1]	DCLKOUT	H	H	L	L	L	H	H
DOUT3	CH1[9]	CH1[10]	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]																																																																																																								
DOUT2	CH1[2]	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]																																																																																																								
DOUT1	S0	S1	S2	S3	S4	CH1[0]	CH1[1]																																																																																																								
DCLKOUT	H	H	L	L	L	H	H																																																																																																								
DOUT3	CH2[9]	CH2[10]	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]																																																																																																								
DOUT2	CH2[2]	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]																																																																																																								
DOUT1	S0	S1	S2	S3	S4	CH2[0]	CH2[1]																																																																																																								
DCLKOUT	H	H	L	L	L	H	H																																																																																																								
DOUT3	CH3[9]	CH3[10]	CH3[11]	CH3[12]	CH3[13]	CH3[14]	CH3[15]																																																																																																								
DOUT2	CH3[2]	CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]																																																																																																								
DOUT1	S0	S1	S2	S3	S4	CH3[0]	CH3[1]																																																																																																								
DCLKOUT	H	H	L	L	L	H	H																																																																																																								

Figure 5-8. LVDS Format 34

LVDS Format 33 is defined in [Fig. 5-9](#).

Format ID: 33 Number of channels: 2 Bits per channel: 16 Clock cycles per pixel: 2 Number of data pairs: 3																																																																															
<table border="1"> <tr><td>DOUT3</td><td>CH1[9]</td><td>CH1[10]</td><td>CH1[11]</td><td>CH1[12]</td><td>CH1[13]</td><td>CH1[14]</td><td>CH1[15]</td></tr> <tr><td>DOUT2</td><td>CH1[2]</td><td>CH1[3]</td><td>CH1[4]</td><td>CH1[5]</td><td>CH1[6]</td><td>CH1[7]</td><td>CH1[8]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH1[0]</td><td>CH1[1]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 1</p>								DOUT3	CH1[9]	CH1[10]	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]	DOUT2	CH1[2]	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	DOUT1	S0	S1	S2	S3	S4	CH1[0]	CH1[1]	DCLKOUT	H	H	L	L	L	H	H	<table border="1"> <tr><td>DOUT3</td><td>CH2[9]</td><td>CH2[10]</td><td>CH2[11]</td><td>CH2[12]</td><td>CH2[13]</td><td>CH2[14]</td><td>CH2[15]</td></tr> <tr><td>DOUT2</td><td>CH2[2]</td><td>CH2[3]</td><td>CH2[4]</td><td>CH2[5]</td><td>CH2[6]</td><td>CH2[7]</td><td>CH2[8]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH2[0]</td><td>CH2[1]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 2</p>								DOUT3	CH2[9]	CH2[10]	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]	DOUT2	CH2[2]	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	DOUT1	S0	S1	S2	S3	S4	CH2[0]	CH2[1]	DCLKOUT	H	H	L	L	L	H	H
DOUT3	CH1[9]	CH1[10]	CH1[11]	CH1[12]	CH1[13]	CH1[14]	CH1[15]																																																																								
DOUT2	CH1[2]	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]																																																																								
DOUT1	S0	S1	S2	S3	S4	CH1[0]	CH1[1]																																																																								
DCLKOUT	H	H	L	L	L	H	H																																																																								
DOUT3	CH2[9]	CH2[10]	CH2[11]	CH2[12]	CH2[13]	CH2[14]	CH2[15]																																																																								
DOUT2	CH2[2]	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]																																																																								
DOUT1	S0	S1	S2	S3	S4	CH2[0]	CH2[1]																																																																								
DCLKOUT	H	H	L	L	L	H	H																																																																								

Figure 5-9. LVDS Format 33

LVDS Format 39 is defined in [Fig. 5-10](#).

Format ID: 39 Number of channels: 4 Bits per channel: 10 Clock cycles per pixel: 4 Number of data pairs: 2																																																															
<table border="1"> <tr><td>DOUT2</td><td>CH1[3]</td><td>CH1[4]</td><td>CH1[5]</td><td>CH1[6]</td><td>CH1[7]</td><td>CH1[8]</td><td>CH1[9]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>CH1[0]</td><td>CH1[1]</td><td>CH1[2]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 1</p>								DOUT2	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]	DOUT1	S0	S1	S2	S3	CH1[0]	CH1[1]	CH1[2]	DCLKOUT	H	H	L	L	L	H	H	<table border="1"> <tr><td>DOUT2</td><td>CH2[3]</td><td>CH2[4]</td><td>CH2[5]</td><td>CH2[6]</td><td>CH2[7]</td><td>CH2[8]</td><td>CH2[9]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>CH2[0]</td><td>CH2[1]</td><td>CH2[2]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 2</p>								DOUT2	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]	DOUT1	S0	S1	S2	S3	CH2[0]	CH2[1]	CH2[2]	DCLKOUT	H	H	L	L	L	H	H
DOUT2	CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]																																																								
DOUT1	S0	S1	S2	S3	CH1[0]	CH1[1]	CH1[2]																																																								
DCLKOUT	H	H	L	L	L	H	H																																																								
DOUT2	CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]																																																								
DOUT1	S0	S1	S2	S3	CH2[0]	CH2[1]	CH2[2]																																																								
DCLKOUT	H	H	L	L	L	H	H																																																								
<table border="1"> <tr><td>DOUT2</td><td>CH3[3]</td><td>CH3[4]</td><td>CH3[5]</td><td>CH3[6]</td><td>CH3[7]</td><td>CH3[8]</td><td>CH3[9]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>CH3[0]</td><td>CH3[1]</td><td>CH3[2]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 3</p>								DOUT2	CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]	DOUT1	S0	S1	S2	S3	CH3[0]	CH3[1]	CH3[2]	DCLKOUT	H	H	L	L	L	H	H	<table border="1"> <tr><td>DOUT2</td><td>CH4[3]</td><td>CH4[4]</td><td>CH4[5]</td><td>CH4[6]</td><td>CH4[7]</td><td>CH4[8]</td><td>CH4[9]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>CH4[0]</td><td>CH4[1]</td><td>CH4[2]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 4</p>								DOUT2	CH4[3]	CH4[4]	CH4[5]	CH4[6]	CH4[7]	CH4[8]	CH4[9]	DOUT1	S0	S1	S2	S3	CH4[0]	CH4[1]	CH4[2]	DCLKOUT	H	H	L	L	L	H	H
DOUT2	CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]																																																								
DOUT1	S0	S1	S2	S3	CH3[0]	CH3[1]	CH3[2]																																																								
DCLKOUT	H	H	L	L	L	H	H																																																								
DOUT2	CH4[3]	CH4[4]	CH4[5]	CH4[6]	CH4[7]	CH4[8]	CH4[9]																																																								
DOUT1	S0	S1	S2	S3	CH4[0]	CH4[1]	CH4[2]																																																								
DCLKOUT	H	H	L	L	L	H	H																																																								

Figure 5-10. LVDS Format 39

LVDS Format 38 is defined in [Fig. 5-11](#).

Format ID: 38		DOUT2							CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]
Number of channels: 3		DOUT1							S0	S1	S2	S3	CH1[0]	CH1[1]	CH1[2]
Bits per channel: 10		DCLKOUT							H	H	L	L	L	H	H
Clock cycles per pixel: 3		Data Block 1													
Number of data pairs: 2		DOUT2							CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]
		DOUT1							S0	S1	S2	S3	CH2[0]	CH2[1]	CH2[2]
		DCLKOUT							H	H	L	L	L	H	H
		Data Block 2													
		DOUT2							CH3[3]	CH3[4]	CH3[5]	CH3[6]	CH3[7]	CH3[8]	CH3[9]
		DOUT1							S0	S1	S2	S3	CH3[0]	CH3[1]	CH3[2]
		DCLKOUT							H	H	L	L	L	H	H
		Data Block 3													

Figure 5-11. LVDS Format 38

LVDS Format 37 is defined in [Fig. 5-12](#).

Format ID: 37		DOUT2							CH1[3]	CH1[4]	CH1[5]	CH1[6]	CH1[7]	CH1[8]	CH1[9]
Number of channels: 2		DOUT1							S0	S1	S2	S3	CH1[0]	CH1[1]	CH1[2]
Bits per channel: 10		DCLKOUT							H	H	L	L	H	H	
Clock cycles per pixel: 2		Data Block 1													
Number of data pairs: 2		DOUT2							CH2[3]	CH2[4]	CH2[5]	CH2[6]	CH2[7]	CH2[8]	CH2[9]
		DOUT1							S0	S1	S2	S3	CH2[0]	CH2[1]	CH2[2]
		DCLKOUT							H	H	L	L	H	H	
		Data Block 2													

Figure 5-12. LVDS Format 37

LVDS Format 43 is defined in [Fig. 5-13](#).

Format ID: 43		DOUT3							CH1[12]	CH1[11]	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]
Number of channels: 4		DOUT2							CH1[3]	CH1[2]	CH1[1]	CH1[0]	CH1[15]	CH1[14]	CH1[13]
Bits per channel: 16		DOUT1							S0	S1	S2	S3	S4	CH1[5]	CH1[4]
Clock cycles per pixel: 4		DCLKOUT							H	H	L	L	L	H	H
Number of data pairs: 3		Data Block 1													
		DOUT3							CH2[12]	CH2[11]	CH2[10]	CH2[9]	CH2[8]	CH2[7]	CH2[6]
		DOUT2							CH2[3]	CH2[2]	CH2[1]	CH2[0]	CH2[15]	CH2[14]	CH2[13]
		DOUT1							S0	S1	S2	S3	S4	CH2[5]	CH2[4]
		DCLKOUT							H	H	L	L	L	H	H
		Data Block 2													
		DOUT3							CH3[12]	CH3[11]	CH3[10]	CH3[9]	CH3[8]	CH3[7]	CH3[6]
		DOUT2							CH3[3]	CH3[2]	CH3[1]	CH3[0]	CH3[15]	CH3[14]	CH3[13]
		DOUT1							S0	S1	S2	S3	S4	CH3[5]	CH3[4]
		DCLKOUT							H	H	L	L	L	H	H
		Data Block 3													
		DOUT3							CH4[12]	CH4[11]	CH4[10]	CH4[9]	CH4[8]	CH4[7]	CH4[6]
		DOUT2							CH4[3]	CH4[2]	CH4[1]	CH4[0]	CH4[15]	CH4[14]	CH4[13]
		DOUT1							S0	S1	S2	S3	S4	CH4[5]	CH4[4]
		DCLKOUT							H	H	L	L	L	H	H
		Data Block 4													

Figure 5-13. LVDS Format 43

LVDS Format 42 is defined in [Fig. 5-14](#).

Format ID: 42 Number of channels: 3 Bits per channel: 16 Clock cycles per pixel: 3 Number of data pairs: 3							<table border="1"> <tr><td>DOUT3</td><td>CH1[12]</td><td>CH1[11]</td><td>CH1[10]</td><td>CH1[9]</td><td>CH1[8]</td><td>CH1[7]</td><td>CH1[6]</td></tr> <tr><td>DOUT2</td><td>CH1[3]</td><td>CH1[2]</td><td>CH1[1]</td><td>CH1[0]</td><td>CH1[15]</td><td>CH1[14]</td><td>CH1[13]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH1[5]</td><td>CH1[4]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 1</p>							DOUT3	CH1[12]	CH1[11]	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]	DOUT2	CH1[3]	CH1[2]	CH1[1]	CH1[0]	CH1[15]	CH1[14]	CH1[13]	DOUT1	S0	S1	S2	S3	S4	CH1[5]	CH1[4]	DCLKOUT	H	H	L	L	L	H	H																																
DOUT3	CH1[12]	CH1[11]	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]																																																																						
DOUT2	CH1[3]	CH1[2]	CH1[1]	CH1[0]	CH1[15]	CH1[14]	CH1[13]																																																																						
DOUT1	S0	S1	S2	S3	S4	CH1[5]	CH1[4]																																																																						
DCLKOUT	H	H	L	L	L	H	H																																																																						
<table border="1"> <tr><td>DOUT3</td><td>CH2[12]</td><td>CH2[11]</td><td>CH2[10]</td><td>CH2[9]</td><td>CH2[8]</td><td>CH2[7]</td><td>CH2[6]</td></tr> <tr><td>DOUT2</td><td>CH2[3]</td><td>CH2[2]</td><td>CH2[1]</td><td>CH2[0]</td><td>CH2[15]</td><td>CH2[14]</td><td>CH2[13]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH2[5]</td><td>CH2[4]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 2</p>							DOUT3	CH2[12]	CH2[11]	CH2[10]	CH2[9]	CH2[8]	CH2[7]	CH2[6]	DOUT2	CH2[3]	CH2[2]	CH2[1]	CH2[0]	CH2[15]	CH2[14]	CH2[13]	DOUT1	S0	S1	S2	S3	S4	CH2[5]	CH2[4]	DCLKOUT	H	H	L	L	L	H	H	<table border="1"> <tr><td>DOUT3</td><td>CH3[12]</td><td>CH3[11]</td><td>CH3[10]</td><td>CH3[9]</td><td>CH3[8]</td><td>CH3[7]</td><td>CH3[6]</td></tr> <tr><td>DOUT2</td><td>CH3[3]</td><td>CH3[2]</td><td>CH3[1]</td><td>CH3[0]</td><td>CH3[15]</td><td>CH3[14]</td><td>CH3[13]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH3[5]</td><td>CH3[4]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 3</p>							DOUT3	CH3[12]	CH3[11]	CH3[10]	CH3[9]	CH3[8]	CH3[7]	CH3[6]	DOUT2	CH3[3]	CH3[2]	CH3[1]	CH3[0]	CH3[15]	CH3[14]	CH3[13]	DOUT1	S0	S1	S2	S3	S4	CH3[5]	CH3[4]	DCLKOUT	H	H	L	L	L	H	H
DOUT3	CH2[12]	CH2[11]	CH2[10]	CH2[9]	CH2[8]	CH2[7]	CH2[6]																																																																						
DOUT2	CH2[3]	CH2[2]	CH2[1]	CH2[0]	CH2[15]	CH2[14]	CH2[13]																																																																						
DOUT1	S0	S1	S2	S3	S4	CH2[5]	CH2[4]																																																																						
DCLKOUT	H	H	L	L	L	H	H																																																																						
DOUT3	CH3[12]	CH3[11]	CH3[10]	CH3[9]	CH3[8]	CH3[7]	CH3[6]																																																																						
DOUT2	CH3[3]	CH3[2]	CH3[1]	CH3[0]	CH3[15]	CH3[14]	CH3[13]																																																																						
DOUT1	S0	S1	S2	S3	S4	CH3[5]	CH3[4]																																																																						
DCLKOUT	H	H	L	L	L	H	H																																																																						

Figure 5-14. LVDS Format 42

LVDS Format 41 is defined in [Fig. 5-15](#).

Format ID: 41 Number of channels: 2 Bits per channel: 16 Clock cycles per pixel: 2 Number of data pairs: 3																																																																													
<table border="1"> <tr><td>DOUT3</td><td>CH1[12]</td><td>CH1[11]</td><td>CH1[10]</td><td>CH1[9]</td><td>CH1[8]</td><td>CH1[7]</td><td>CH1[6]</td></tr> <tr><td>DOUT2</td><td>CH1[3]</td><td>CH1[2]</td><td>CH1[1]</td><td>CH1[0]</td><td>CH1[15]</td><td>CH1[14]</td><td>CH1[13]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH1[5]</td><td>CH1[4]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 1</p>							DOUT3	CH1[12]	CH1[11]	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]	DOUT2	CH1[3]	CH1[2]	CH1[1]	CH1[0]	CH1[15]	CH1[14]	CH1[13]	DOUT1	S0	S1	S2	S3	S4	CH1[5]	CH1[4]	DCLKOUT	H	H	L	L	L	H	H	<table border="1"> <tr><td>DOUT3</td><td>CH2[12]</td><td>CH2[11]</td><td>CH2[10]</td><td>CH2[9]</td><td>CH2[8]</td><td>CH2[7]</td><td>CH2[6]</td></tr> <tr><td>DOUT2</td><td>CH2[3]</td><td>CH2[2]</td><td>CH2[1]</td><td>CH2[0]</td><td>CH2[15]</td><td>CH2[14]</td><td>CH2[13]</td></tr> <tr><td>DOUT1</td><td>S0</td><td>S1</td><td>S2</td><td>S3</td><td>S4</td><td>CH2[5]</td><td>CH2[4]</td></tr> <tr><td>DCLKOUT</td><td>H</td><td>H</td><td>L</td><td>L</td><td>L</td><td>H</td><td>H</td></tr> </table> <p style="text-align: center;">Data Block 2</p>							DOUT3	CH2[12]	CH2[11]	CH2[10]	CH2[9]	CH2[8]	CH2[7]	CH2[6]	DOUT2	CH2[3]	CH2[2]	CH2[1]	CH2[0]	CH2[15]	CH2[14]	CH2[13]	DOUT1	S0	S1	S2	S3	S4	CH2[5]	CH2[4]	DCLKOUT	H	H	L	L	L	H	H
DOUT3	CH1[12]	CH1[11]	CH1[10]	CH1[9]	CH1[8]	CH1[7]	CH1[6]																																																																						
DOUT2	CH1[3]	CH1[2]	CH1[1]	CH1[0]	CH1[15]	CH1[14]	CH1[13]																																																																						
DOUT1	S0	S1	S2	S3	S4	CH1[5]	CH1[4]																																																																						
DCLKOUT	H	H	L	L	L	H	H																																																																						
DOUT3	CH2[12]	CH2[11]	CH2[10]	CH2[9]	CH2[8]	CH2[7]	CH2[6]																																																																						
DOUT2	CH2[3]	CH2[2]	CH2[1]	CH2[0]	CH2[15]	CH2[14]	CH2[13]																																																																						
DOUT1	S0	S1	S2	S3	S4	CH2[5]	CH2[4]																																																																						
DCLKOUT	H	H	L	L	L	H	H																																																																						

Figure 5-15. LVDS Format 41

5.1.2 CMOS (TG) Output Format

The CMOS (TG) output formats are defined in this section. See [Section 4.5](#) for details of the CS82L44 output formats.

CMOS (TG) Format 23 is defined in [Fig. 5-16](#).

Format ID: 23 Number of channels: 4 Bits per channel: 12 Clock cycles per pixel: 8 Number of data lines: 6												Note: This format is only supported in Clocking Mode 1 or Clocking Mode 2 (see Section 4.3).												
DOUT6	CH1[11]			CH1[5]			CH2[11]			CH2[5]			CH3[11]			CH3[5]			CH4[11]			CH4[5]		
DOUT5	CH1[10]			CH1[4]			CH2[10]			CH2[4]			CH3[10]			CH3[4]			CH4[10]			CH4[4]		
DOUT4	CH1[9]			CH1[3]			CH2[9]			CH2[3]			CH3[9]			CH3[3]			CH4[9]			CH4[3]		
DOUT3	CH1[8]			CH1[2]			CH2[8]			CH2[2]			CH3[8]			CH3[2]			CH4[8]			CH4[2]		
DOUT2	CH1[7]			CH1[1]			CH2[7]			CH2[1]			CH3[7]			CH3[1]			CH4[7]			CH4[1]		
DOUT1	CH1[6]			CH1[0]			CH2[6]			CH2[0]			CH3[6]			CH3[0]			CH4[6]			CH4[0]		
DCLKOUT1	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L		
DCLKOUT2	S0			S0			S0			S0			S0			S0			S0			S0		

Figure 5-16. CMOS (TG) Format 23

CMOS (TG) Format 22 is defined in [Fig. 5-17](#).

Format ID: 22 Number of channels: 3 Bits per channel: 12 Clock cycles per pixel: 6 Number of data lines: 6	DOUT6	CH1[11]		CH1[5]		CH2[11]		CH2[5]		CH3[11]		CH3[5]	
	DOUT5	CH1[10]		CH1[4]		CH2[10]		CH2[4]		CH3[10]		CH3[4]	
	DOUT4	CH1[9]		CH1[3]		CH2[9]		CH2[3]		CH3[9]		CH3[3]	
	DOUT3	CH1[8]		CH1[2]		CH2[8]		CH2[2]		CH3[8]		CH3[2]	
	DOUT2	CH1[7]		CH1[1]		CH2[7]		CH2[1]		CH3[7]		CH3[1]	
	DOUT1	CH1[6]		CH1[0]		CH2[6]		CH2[0]		CH3[6]		CH3[0]	
	DCLKOUT1	H	L	H	L	H	L	H	L	H	L	H	L
	DCLKOUT2	S0		S0		S0		S0		S0		S0	

Figure 5-17. CMOS (TG) Format 22

CMOS (TG) Format 21 is defined in [Fig. 5-18](#).

Format ID: 21 Number of channels: 2 Bits per channel: 12 Clock cycles per pixel: 4 Number of data lines: 6	DOUT6	CH1[11]		CH1[5]		CH2[11]		CH2[5]	
	DOUT5	CH1[10]		CH1[4]		CH2[10]		CH2[4]	
	DOUT4	CH1[9]		CH1[3]		CH2[9]		CH2[3]	
	DOUT3	CH1[8]		CH1[2]		CH2[8]		CH2[2]	
	DOUT2	CH1[7]		CH1[1]		CH2[7]		CH2[1]	
	DOUT1	CH1[6]		CH1[0]		CH2[6]		CH2[0]	
	DCLKOUT1	H	L	H	L	H	L	H	L
	DCLKOUT2	S0		S0		S0		S0	

Figure 5-18. CMOS (TG) Format 21

5.1.3 CMOS (External) Output Format

The CMOS (External) output formats are defined in this section. See [Section 4.5](#) for details of the CS82L44 output formats.

CMOS (External) Format 3 is defined in [Fig. 5-19](#).

Format ID: 3 Number of channels: 4 Bits per channel: 16 Clock cycles per pixel: 4 Number of data lines: 8	DOUT8	CH1[15]	CH1[7]	CH2[15]	CH2[7]	CH3[15]	CH3[7]	CH4[15]	CH4[7]
	DOUT7	CH1[14]	CH1[6]	CH2[14]	CH2[6]	CH3[14]	CH3[6]	CH4[14]	CH4[6]
	DOUT6	CH1[13]	CH1[5]	CH2[13]	CH2[5]	CH3[13]	CH3[5]	CH4[13]	CH4[5]
	DOUT5	CH1[12]	CH1[4]	CH2[12]	CH2[4]	CH3[12]	CH3[4]	CH4[12]	CH4[4]
	DOUT4	CH1[11]	CH1[3]	CH2[11]	CH2[3]	CH3[11]	CH3[3]	CH4[11]	CH4[3]
	DOUT3	CH1[10]	CH1[2]	CH2[10]	CH2[2]	CH3[10]	CH3[2]	CH4[10]	CH4[2]
	DOUT2	CH1[9]	CH1[1]	CH2[9]	CH2[1]	CH3[9]	CH3[1]	CH4[9]	CH4[1]
	DOUT1	CH1[8]	CH1[0]	CH2[8]	CH2[0]	CH3[8]	CH3[0]	CH4[8]	CH4[0]
	MCLK	H	L	H	L	H	L	H	L

Figure 5-19. CMOS (External) Format 3

CMOS (External) Format 2 is defined in [Fig. 5-20](#).

Format ID: 2 Number of channels: 3 Bits per channel: 16 Clock cycles per pixel: 3 Number of data lines: 8	DOUT8	CH1[15]	CH1[7]	CH2[15]	CH2[7]	CH3[15]	CH3[7]
	DOUT7	CH1[14]	CH1[6]	CH2[14]	CH2[6]	CH3[14]	CH3[6]
	DOUT6	CH1[13]	CH1[5]	CH2[13]	CH2[5]	CH3[13]	CH3[5]
	DOUT5	CH1[12]	CH1[4]	CH2[12]	CH2[4]	CH3[12]	CH3[4]
	DOUT4	CH1[11]	CH1[3]	CH2[11]	CH2[3]	CH3[11]	CH3[3]
	DOUT3	CH1[10]	CH1[2]	CH2[10]	CH2[2]	CH3[10]	CH3[2]
	DOUT2	CH1[9]	CH1[1]	CH2[9]	CH2[1]	CH3[9]	CH3[1]
	DOUT1	CH1[8]	CH1[0]	CH2[8]	CH2[0]	CH3[8]	CH3[0]
	MCLK	H	L	H	L	H	L

Figure 5-20. CMOS (External) Format 2

CMOS (External) Format 1 is defined in [Fig. 5-21](#).

Format ID: 1 Number of channels: 2 Bits per channel: 16 Clock cycles per pixel: 2 Number of data lines: 8	DOUT8	CH1[15]	CH1[7]	CH2[15]	CH2[7]
	DOUT7	CH1[14]	CH1[6]	CH2[14]	CH2[6]
	DOUT6	CH1[13]	CH1[5]	CH2[13]	CH2[5]
	DOUT5	CH1[12]	CH1[4]	CH2[12]	CH2[4]
	DOUT4	CH1[11]	CH1[3]	CH2[11]	CH2[3]
	DOUT3	CH1[10]	CH1[2]	CH2[10]	CH2[2]
	DOUT2	CH1[9]	CH1[1]	CH2[9]	CH2[1]
	DOUT1	CH1[8]	CH1[0]	CH2[8]	CH2[0]
	MCLK	H	L	H	L

Figure 5-21. CMOS (External) Format 1

CMOS (External) Format 15 is defined in [Fig. 5-22](#).

Format ID: 15 Number of channels: 4 Bits per channel: 16 Clock cycles per pixel: 8 Number of data lines: 4	DOUT8	CH1[15]	CH1[11]	CH1[7]	CH1[3]	CH2[15]	CH2[11]	CH2[7]	CH2[3]	CH3[15]	CH3[11]	CH3[7]	CH3[3]	CH4[15]	CH4[11]	CH4[7]	CH4[3]
	DOUT7	CH1[14]	CH1[10]	CH1[6]	CH1[2]	CH2[14]	CH2[10]	CH2[6]	CH2[2]	CH3[14]	CH3[10]	CH3[6]	CH3[2]	CH4[14]	CH4[10]	CH4[6]	CH4[2]
	DOUT6	CH1[13]	CH1[9]	CH1[5]	CH1[1]	CH2[13]	CH2[9]	CH2[5]	CH2[1]	CH3[13]	CH3[9]	CH3[5]	CH3[1]	CH4[13]	CH4[9]	CH4[5]	CH4[1]
	DOUT5	CH1[12]	CH1[8]	CH1[4]	CH1[0]	CH2[12]	CH2[8]	CH2[4]	CH2[0]	CH3[12]	CH3[8]	CH3[4]	CH3[0]	CH4[12]	CH4[8]	CH4[4]	CH4[0]
	MCLK	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L

Figure 5-22. CMOS (External) Format 15

CMOS (External) Format 14 is defined in [Fig. 5-23](#).

Format ID: 14 Number of channels: 3 Bits per channel: 16 Clock cycles per pixel: 6 Number of data lines: 4	DOUT8	CH1[15]	CH1[11]	CH1[7]	CH1[3]	CH2[15]	CH2[11]	CH2[7]	CH2[3]	CH3[15]	CH3[11]	CH3[7]	CH3[3]
	DOUT7	CH1[14]	CH1[10]	CH1[6]	CH1[2]	CH2[14]	CH2[10]	CH2[6]	CH2[2]	CH3[14]	CH3[10]	CH3[6]	CH3[2]
	DOUT6	CH1[13]	CH1[9]	CH1[5]	CH1[1]	CH2[13]	CH2[9]	CH2[5]	CH2[1]	CH3[13]	CH3[9]	CH3[5]	CH3[1]
	DOUT5	CH1[12]	CH1[8]	CH1[4]	CH1[0]	CH2[12]	CH2[8]	CH2[4]	CH2[0]	CH3[12]	CH3[8]	CH3[4]	CH3[0]
	MCLK	H	L	H	L	H	L	H	L	H	L	H	L

Figure 5-23. CMOS (External) Format 14

CMOS (External) Format 13 is defined in [Fig. 5-24](#).

Format ID: 13 Number of channels: 2 Bits per channel: 16 Clock cycles per pixel: 4 Number of data lines: 4	DOUT8	CH1[15]	CH1[11]	CH1[7]	CH1[3]	CH2[15]	CH2[11]	CH2[7]	CH2[3]
	DOUT7	CH1[14]	CH1[10]	CH1[6]	CH1[2]	CH2[14]	CH2[10]	CH2[6]	CH2[2]
	DOUT6	CH1[13]	CH1[9]	CH1[5]	CH1[1]	CH2[13]	CH2[9]	CH2[5]	CH2[1]
	DOUT5	CH1[12]	CH1[8]	CH1[4]	CH1[0]	CH2[12]	CH2[8]	CH2[4]	CH2[0]
	MCLK	H	L	H	L	H	L	H	L

Figure 5-24. CMOS (External) Format 13

CMOS (External) Format 19 is defined in [Fig. 5-25](#).

Format ID: 19 Number of channels: 4 Bits per channel: 16 Clock cycles per pixel: 4 Number of data lines: 8	DOUT8	CH1[15]	CH1[11]	CH1[7]	CH1[3]	CH2[15]	CH2[11]	CH2[7]	CH2[3]
	DOUT7	CH1[14]	CH1[10]	CH1[6]	CH1[2]	CH2[14]	CH2[10]	CH2[6]	CH2[2]
	DOUT6	CH1[13]	CH1[9]	CH1[5]	CH1[1]	CH2[13]	CH2[9]	CH2[5]	CH2[1]
	DOUT5	CH1[12]	CH1[8]	CH1[4]	CH1[0]	CH2[12]	CH2[8]	CH2[4]	CH2[0]
	DOUT4	CH3[15]	CH3[11]	CH3[7]	CH3[3]	CH4[15]	CH4[11]	CH4[7]	CH4[3]
	DOUT3	CH3[14]	CH3[10]	CH3[6]	CH3[2]	CH4[14]	CH4[10]	CH4[6]	CH4[2]
	DOUT2	CH3[13]	CH3[9]	CH3[5]	CH3[1]	CH4[13]	CH4[9]	CH4[5]	CH4[1]
	DOUT1	CH3[12]	CH3[8]	CH3[4]	CH3[0]	CH4[12]	CH4[8]	CH4[4]	CH4[0]
	MCLK	H	L	H	L	H	L	H	L

Figure 5-25. CMOS (External) Format 19

CMOS (External) Format 17 is defined in [Fig. 5-26](#).

Format ID: 17 Number of channels: 2 Bits per channel: 16 Clock cycles per pixel: 2 Number of data lines: 8	DOUT8	CH1[15]	CH1[11]	CH1[7]	CH1[3]
	DOUT7	CH1[14]	CH1[10]	CH1[6]	CH1[2]
	DOUT6	CH1[13]	CH1[9]	CH1[5]	CH1[1]
	DOUT5	CH1[12]	CH1[8]	CH1[4]	CH1[0]
	DOUT4	CH2[15]	CH2[11]	CH2[7]	CH2[3]
	DOUT3	CH2[14]	CH2[10]	CH2[6]	CH2[2]
	DOUT2	CH2[13]	CH2[9]	CH2[5]	CH2[1]
	DOUT1	CH2[12]	CH2[8]	CH2[4]	CH2[0]
	MCLK	H	L	H	L

Figure 5-26. CMOS (External) Format 17

CMOS (External) Format 7 is defined in [Fig. 5-27](#).

Format ID: 7 Number of channels: 4 Bits per channel: 8 Clock cycles per pixel: 4 Number of data lines: 8	DOUT8	CH1[7]	CH2[7]	CH3[7]	CH4[7]			
	DOUT7	CH1[6]	CH2[6]	CH3[6]	CH4[6]			
	DOUT6	CH1[5]	CH2[5]	CH3[5]	CH4[5]			
	DOUT5	CH1[4]	CH2[4]	CH3[4]	CH4[4]			
	DOUT4	CH1[3]	CH2[3]	CH3[3]	CH4[3]			
	DOUT3	CH1[2]	CH2[2]	CH3[2]	CH4[2]			
	DOUT2	CH1[1]	CH2[1]	CH3[1]	CH4[1]			
	DOUT1	CH1[0]	CH2[0]	CH3[0]	CH4[0]			
	MCLK	H	L	H	L	H	L	H

Figure 5-27. CMOS (External) Format 7

CMOS (External) Format 6 is defined in [Fig. 5-28](#).

Format ID: 6 Number of channels: 3 Bits per channel: 8 Clock cycles per pixel: 3 Number of data lines: 8	DOUT8	CH1[7]	CH2[7]	CH3[7]		
	DOUT7	CH1[6]	CH2[6]	CH3[6]		
	DOUT6	CH1[5]	CH2[5]	CH3[5]		
	DOUT5	CH1[4]	CH2[4]	CH3[4]		
	DOUT4	CH1[3]	CH2[3]	CH3[3]		
	DOUT3	CH1[2]	CH2[2]	CH3[2]		
	DOUT2	CH1[1]	CH2[1]	CH3[1]		
	DOUT1	CH1[0]	CH2[0]	CH3[0]		
	MCLK	H	L	H	L	H

Figure 5-28. CMOS (External) Format 6

CMOS (External) Format 5 is defined in [Fig. 5-29](#).

Format ID: 5 Number of channels: 2 Bits per channel: 8 Clock cycles per pixel: 2 Number of data lines: 8	DOUT8	CH1[7]	CH2[7]	
	DOUT7	CH1[6]	CH2[6]	
	DOUT6	CH1[5]	CH2[5]	
	DOUT5	CH1[4]	CH2[4]	
	DOUT4	CH1[3]	CH2[3]	
	DOUT3	CH1[2]	CH2[2]	
	DOUT2	CH1[1]	CH2[1]	
	DOUT1	CH1[0]	CH2[0]	
	MCLK	H	L	H

Figure 5-29. CMOS (External) Format 5

CMOS (External) Format 11 is defined in Fig. 5-30.

Format ID: 11 Number of channels: 4 Bits per channel: 16 Clock cycles per pixel: 8 Number of data lines: 8	DOUT8	CH1[15]	CH1[7]	CH2[15]	CH2[7]	CH3[15]	CH3[7]	CH4[15]	CH4[7]					
	DOUT7	CH1[14]	CH1[6]	CH2[14]	CH2[6]	CH3[14]	CH3[6]	CH4[14]	CH4[6]					
	DOUT6	CH1[13]	CH1[5]	CH2[13]	CH2[5]	CH3[13]	CH3[5]	CH4[13]	CH4[5]					
	DOUT5	CH1[12]	CH1[4]	CH2[12]	CH2[4]	CH3[12]	CH3[4]	CH4[12]	CH4[4]					
	DOUT4	CH1[11]	CH1[3]	CH2[11]	CH2[3]	CH3[11]	CH3[3]	CH4[11]	CH4[3]					
	DOUT3	CH1[10]	CH1[2]	CH2[10]	CH2[2]	CH3[10]	CH3[2]	CH4[10]	CH4[2]					
	DOUT2	CH1[9]	CH1[1]	CH2[9]	CH2[1]	CH3[9]	CH3[1]	CH4[9]	CH4[1]					
	DOUT1	CH1[8]	CH1[0]	CH2[8]	CH2[0]	CH3[8]	CH3[0]	CH4[8]	CH4[0]					
	MCLK	H	L	H	L	H	L	H	L	H	L	H	L	H

Figure 5-30. CMOS (External) Format 11

CMOS (External) Format 10 is defined in Fig. 5-31.

Format ID: 10 Number of channels: 3 Bits per channel: 16 Clock cycles per pixel: 6 Number of data lines: 8	DOUT8	CH1[15]	CH1[7]	CH2[15]	CH2[7]	CH3[15]	CH3[7]	
	DOUT7	CH1[14]	CH1[6]	CH2[14]	CH2[6]	CH3[14]	CH3[6]	
	DOUT6	CH1[13]	CH1[5]	CH2[13]	CH2[5]	CH3[13]	CH3[5]	
	DOUT5	CH1[12]	CH1[4]	CH2[12]	CH2[4]	CH3[12]	CH3[4]	
	DOUT4	CH1[11]	CH1[3]	CH2[11]	CH2[3]	CH3[11]	CH3[3]	
	DOUT3	CH1[10]	CH1[2]	CH2[10]	CH2[2]	CH3[10]	CH3[2]	
	DOUT2	CH1[9]	CH1[1]	CH2[9]	CH2[1]	CH3[9]	CH3[1]	
	DOUT1	CH1[8]	CH1[0]	CH2[8]	CH2[0]	CH3[8]	CH3[0]	
	MCLK	H	L	H	L	H	L	H

Figure 5-31. CMOS (External) Format 10

CMOS (External) Format 9 is defined in Fig. 5-32.

Format ID: 9 Number of channels: 2 Bits per channel: 16 Clock cycles per pixel: 4 Number of data lines: 8	DOUT8	CH1[15]	CH1[7]	CH2[15]	CH2[7]	
	DOUT7	CH1[14]	CH1[6]	CH2[14]	CH2[6]	
	DOUT6	CH1[13]	CH1[5]	CH2[13]	CH2[5]	
	DOUT5	CH1[12]	CH1[4]	CH2[12]	CH2[4]	
	DOUT4	CH1[11]	CH1[3]	CH2[11]	CH2[3]	
	DOUT3	CH1[10]	CH1[2]	CH2[10]	CH2[2]	
	DOUT2	CH1[9]	CH1[1]	CH2[9]	CH2[1]	
	DOUT1	CH1[8]	CH1[0]	CH2[8]	CH2[0]	
	MCLK	H	L	H	L	H

Figure 5-32. CMOS (External) Format 9

5.2 Output Code Calculation

The digital output code associated with a given analog input voltage is dependent on how the analog input path is configured (see Section 4.4), and on the selected data-output format (see Section 4.5). This section describes a calculation that can be used to predict the digital output code for a given configuration.

The digital output code can be derived as follows:

1. Calculate $V_{\text{OFFSET}} = (V_{\text{REF}} / 3.6) \times ((2 \times \text{CHx_SEQn_OFFSET} / 511) - 1)$
where V_{REF} = internal reference voltage (1.2 V)
2. Calculate $V_{\text{PGA_INPUT}}$ according to the applicable sampling mode:
 - In CDS Mode ($\text{CDS_EN} = 1$), $V_{\text{PGA_INPUT}} = V_{\text{VSMP}} - V_{\text{RSMP}}$
where V_{VSMP} = video sample level, and V_{RSMP} = reset sample level
 - In non-CDS Mode ($\text{CDS_EN} = 0$), $V_{\text{PGA_INPUT}} = V_{\text{VSMP}} - V_{\text{BIAS}}$
where V_{VSMP} = video sample level, and V_{BIAS} = bias voltage
if the internal bias is enabled, the bias voltage is configured using [VBIAS_LVL](#)

3. Calculate $V_{PGA_OUTPUT} = GAIN \times ((V_{PGA_INPUT} \times (1 - (2 \times CHx_POL)))) - V_{OFFSET}$
 where GAIN = PGA gain represented by **CHx_SEQn_AGAIN**
4. Calculate the ADC output code:

$$\text{ADC output code} = \max\left(\min\left(\frac{(V_{PGA_OUTPUT} - V_{REF}) \times 2^{RES-1}}{V_{REF}} + 2^{RES-1}, 2^{RES} - 1\right), 0\right)$$

where RES = number of data bits per channel in selected output format

Note: The calculation assumes default digital gain of 1 V/V (**CHx_SEQn_DGAIN** = 0x800)

5.2.1 Example Calculation—CDS Mode

Using example data, the digital output code can be calculated as follows:

- $V_{REF} = 1.2 \text{ V}$
- $V_{VSMP} = 1.0 \text{ V}$
- $V_{RSMP} = 2.5 \text{ V}$
- Offset code (**CHx_SEQn_OFFSET**) = 256
- PGA gain (**CHx_SEQn_AGAIN**) = 1 V/V
- Polarity (**CHx_POL**) = 1
- Output data resolution = 16 bits

$$\text{Calculate } V_{OFFSET} = (1.2 / 3.6) \times ((2 \times 256 / 511) - 1) = 0.000652 \text{ V}$$

$$\text{Calculate } V_{PGA_INPUT} = 1.0 - 2.5 = -1.5 \text{ V}$$

$$\text{Calculate } V_{PGA_OUTPUT} = 1 \times ((-1.5 \times (1 - (2 \times 1))) - 0.000652 \text{ V}) = 1.499348 \text{ V}$$

Calculate the ADC output code:

$$\text{ADC output code} = \max\left(\min\left(\frac{(1.499348 - 1.2) \times 2^{15}}{1.2} + 2^{15}, 2^{16} - 1\right), 0\right) = \max(\min(40942, 65535), 0) = 40942$$

5.2.2 Example Calculation—Non-CDS Mode

Using example data, the digital output code can be calculated as follows:

- $V_{REF} = 1.2 \text{ V}$
- $V_{VSMP} = 2.3 \text{ V}$
- $V_{BIAS} = 1.0 \text{ V}$
- Offset code (**CHx_SEQn_OFFSET**) = 256
- PGA gain (**CHx_SEQn_AGAIN**) = 1 V/V
- Polarity (**CHx_POL**) = 0
- Output data resolution = 16 bits

$$\text{Calculate } V_{OFFSET} = (1.2 / 3.6) \times ((2 \times 256 / 511) - 1) = 0.000652 \text{ V}$$

$$\text{Calculate } V_{PGA_INPUT} = 2.3 - 1.0 = 1.3 \text{ V}$$

$$\text{Calculate } V_{PGA_OUTPUT} = 1 \times ((1.3 \times (1 - (2 \times 0))) - 0.000652 \text{ V}) = 1.299348 \text{ V}$$

Calculate the ADC output code:

$$\text{ADC output code} = \max\left(\min\left(\frac{(1.299348 - 1.2) \times 2^{15}}{1.2} + 2^{15}, 2^{16} - 1\right), 0\right) = \max(\min(35481, 65535), 0) = 35481$$

6 Register Quick Reference—Banked Register Mode (SPI)

This section gives an overview of the control port registers. Refer to the following bit definition tables for bit assignment information.

- This register view is for the CS82L44 4-channel imaging AFE/ADC, using the banked host-interface configuration.
- The register field default values are established on power-up and after soft reset.
- A "—" represents a reserved field/access type.
- The reserved field values must not be modified.
- The registers are 8 bits wide.
- All visible fields are read/write except where indicated with the following shading:

Read/write access
 Read-only access
 Write-only access

Table 6-1. Bank Overview Table

Block Name	Register Quick Reference
BANK0 —Hardware ID, Clocking, MSM, Timing Gen, Output Format, Pad I/O, DAC, PGA	Section 6.1
BANK1 —DAC, PGA, BLC, SARADC	Section 6.2
BANK2 —Timing Gen	Section 6.3
BANK3 —Timing Gen, Test Pattern Gen	Section 6.4
BANK6 —PAD I/O, LED Control, PLL1	Section 6.5
BANK7 —Digital Gain	Section 6.6

6.1 BANK0—Hardware ID, Clocking, MSM, Timing Gen, Output Format, Pad I/O, DAC, PGA

Address	Register	7	6	5	4	3	2	1	0	
0x00 p. 131	BANK	DESCRIM				—	BANK			
		1	1	0	0	0	0	0	0	
0x04 p. 132	ASYNC0_0	—		ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS	
		0	0	0	0	0	0	0	0	
0x05 p. 133	ASYNC0_1	—						OSC_DISABLE		
		0	0	0	0	0	0	0	0	
0x08 p. 131	SFT_RESET	SFT_RESET								
		0	0	0	0	0	0	0	0	
0x0C p. 131	DEVID_0	DEVID_0								
		0	1	0	0	0	1	0	0	
0x0D p. 132	DEVID_1	DEVID_1								
		0	0	1	0	1	0	1	0	
0x0E p. 132	DEVID_2	DEVID_2								
		0	0	0	0	1	0	0	0	
0x10 p. 132	REVID	AREVID				MTLREVID				
		1	0	1	1	0	0	0	0	
0x14 p. 132	RELID	RELID								
		0	0	0	0	0	0	0	0	
0x18 p. 133	DEVICE_CLK_CFG_0	PIXEL_SAMPLE_RATE								
		0	1	1	1	1	0	0	0	
0x19 p. 133	DEVICE_CLK_CFG_1	—			EXT_AFECK_DUR			CLOCK_CFG_MODE		
		0	0	0	0	0	0	0	1	
0x1A p. 134	DEVICE_CLK_CFG_2	—						PLL2_AUTO	PLL1_AUTO	
		0	0	0	0	0	0	1	1	

Address	Register	7	6	5	4	3	2	1	0
0x1B p. 134	DEVICE_CLK_CFG_3	PLL2_SS_FREQ			PLL2_SS_MAG				PLL2_SS_EN
		0	0	0	0	0	0	0	0
0x1E p. 134	DEVICE_CLK_CFG2_2	PLL2_SS_REF_FREQ_0							
		0	0	0	0	0	0	0	0
0x1F p. 134	DEVICE_CLK_CFG2_3	DOUT_READY_EN	—		MCLK_EXT_SS	—		PLL2_SS_REF_FREQ_1	
		1	0	0	0	0	0	0	0
0x20 p. 135	MCLK_FILT_CFG_0	MCLK_MASK_DLY_0							
		0	0	0	0	0	0	0	1
0x21 p. 135	MCLK_FILT_CFG_1	MCLK_MASK_DLY_1							
		0	0	0	0	0	0	0	0
0x22 p. 135	MCLK_FILT_CFG_2	MCLK_MASK_POL	MCLK_MASK_EN	MCLK_MASK_DUR					
		0	0	0	0	0	0	0	1
0x23 p. 136	MCLK_FILT_CFG_3	MCLK_MASK_CLK_DIV			MCLK_MASK_OFF_RST	—	MCLK_MASK_SRC		
		0	0	0	0	0	0	0	0
0x28 p. 136	DEVICE_CTRL_0	LDO4_EN	SHARED_BUS_MODE	GPI12_DOUT_CTRL	—	COMPLETE_LINE	ACTIVE_EN	READY_EN	MSM_EN
		0	0	0	0	0	0	0	1
0x29 p. 137	DEVICE_CTRL_1	TEMP_ERROR_RST_MASK	—	TEMP_ERROR_CLR	—				
		0	0	0	0	0	0	0	0
0x2A p. 137	DEVICE_CTRL_2	LDO4_HIZ	—	LDO_EN_MASK	LDO5_EN	LDO5_ILIMIT_VPC	LDO5_ILIMIT_CTRL		
		0	0	0	0	1	0	0	0
0x2B p. 138	DEVICE_CTRL_3	—			LDO5_VOUT				
		0	0	0	0	0	0	0	0
0x2C p. 138	RLCDAC_CTRL_0	—							VBIAS_EN
		0	0	0	0	0	0	0	
0x2D p. 138	RLCDAC_CTRL_1	—			VBIAS_LVL				
		0	0	0	0	0	0	0	
0x2E p. 138	RLCDAC_CTRL_2	—				VBIAS_ISEL_BOOST	VBIAS_ISEL		VBIAS_REF
		0	0	0	0	0	0	1	
0x34 p. 139	DEVICE_STATUS_0	ERROR_STS	—	ACTIVE_STS	READY_STS	—		IDLE_STS	STARTUP_STS
		0	0	0	0	0	0	0	0
0x36 p. 139	DEVICE_STATUS_2	VDDA_STS	—			—			
		0	0	0	0	0	1	0	0
0x48 p. 139	TG_CONFIG1_0	VSMP_EXT_POL	EXTERNAL_MODE_TG_EN	CDS_EN	CLAMP_EN	CLAMP_MODE		TGSYNC_MODE	EXTERNAL_MODE_EN
		0	0	0	0	0	0	0	1
0x49 p. 140	TG_CONFIG1_1	INIT_SEQ_STATE			VSMP_EXT_DLY				EXTERNAL_MODE_SEL
		0	0	0	0	0	0	0	0
0x4A p. 140	TG_CONFIG1_2	—	TGSYNC_SINGLE_SEQ	NUM_SEQ_STATES		RSMP_EXT_DLY			
		0	0	0	0	0	0	0	1
0x4B p. 141	TG_CONFIG1_3	—				CH4_CLAMP_OVRD	CH3_CLAMP_OVRD	CH2_CLAMP_OVRD	CH1_CLAMP_OVRD
		0	0	0	0	0	0	0	
0x4C p. 184	OP_FORMAT_CFG0_0	FORMAT_LOAD	FORMAT_SEL						
		0	0	0	0	0	0	0	1
0x4D p. 185	OP_FORMAT_CFG0_1	—				LVDS_POL	LVDS_REVERSE	CMOS_EXT_POL	LVDS_BIT_ORDER
		0	0	0	0	0	0	1	

Address	Register	7	6	5	4	3	2	1	0		
0x4E p. 185	OP_FORMAT_CFG0_2	0	0	0	0	0	0	TDM_GAP 0	TDM_EN 0		
0x4F p. 185	OP_FORMAT_CFG0_3	0	0	0	0	0	0	TDM_OFFSET			
0x50 p. 186	OP_FORMAT_CFG1_0	0	0	0	0	0	0	FLAG_S0_FN 0	0		
0x51 p. 186	OP_FORMAT_CFG1_1	0	0	0	0	0	0	FLAG_S2_FN 0	0		
0x52 p. 186	OP_FORMAT_CFG1_2	0	0	0	0	0	0	FLAG_S4_FN 0	0		
0x54 p. 187	CLKOUT_SEL_1_0	CLKOUT4_FN 0	CLKOUT3_FN 0			1	CLKOUT2_FN 0		1	CLKOUT1_FN 0	1
0x56 p. 187	CLKOUT_SEL_1_2	0	0	0	0	0	MON_SEL 0		TGSYNC1_VSMP_FN 0	0	
0x57 p. 187	CLKOUT_SEL_1_3	0	0	0	0	0	TDM_DOUT_DLY_SEL 0		1	TDM_DOUT_DLY_EN 0	MCLK_EXT_LVDS 0
0x5C p. 199	DAC_CTRL_OFS01_CH1_0	0	0	0	0	0	0	CH1_SEQ0_OFFSET_0			
0x5D p. 199	DAC_CTRL_OFS01_CH1_1	0	0	0	0	0	0	0	0	CH1_SEQ0_OFFSET_1 1	
0x5E p. 199	DAC_CTRL_OFS01_CH1_2	0	0	0	0	0	0	CH1_SEQ1_OFFSET_0			
0x5F p. 200	DAC_CTRL_OFS01_CH1_3	0	0	0	0	0	0	0	0	CH1_SEQ1_OFFSET_1 1	
0x60 p. 200	DAC_CTRL_OFS23_CH1_0	0	0	0	0	0	0	CH1_SEQ2_OFFSET_0			
0x61 p. 200	DAC_CTRL_OFS23_CH1_1	0	0	0	0	0	0	0	0	CH1_SEQ2_OFFSET_1 1	
0x62 p. 200	DAC_CTRL_OFS23_CH1_2	0	0	0	0	0	0	CH1_SEQ3_OFFSET_0			
0x63 p. 201	DAC_CTRL_OFS23_CH1_3	0	0	0	0	0	0	0	0	CH1_SEQ3_OFFSET_1 1	
0x64 p. 201	DAC_CTRL_OFS0_CH2_3_0	0	0	0	0	0	0	CH2_SEQ0_OFFSET_0			
0x65 p. 201	DAC_CTRL_OFS0_CH2_3_1	0	0	0	0	0	0	0	0	CH2_SEQ0_OFFSET_1 1	
0x66 p. 201	DAC_CTRL_OFS0_CH2_3_2	0	0	0	0	0	0	CH3_SEQ0_OFFSET_0			
0x67 p. 202	DAC_CTRL_OFS0_CH2_3_3	0	0	0	0	0	0	0	0	CH3_SEQ0_OFFSET_1 1	
0x68 p. 202	DAC_CTRL_OFS0_CH4_5_0	0	0	0	0	0	0	CH4_SEQ0_OFFSET_0			
0x69 p. 202	DAC_CTRL_OFS0_CH4_5_1	0	0	0	0	0	0	0	0	CH4_SEQ0_OFFSET_1 1	
0x74 p. 207	PGA_CTRL_AGAIN_CH1_0	0	0	0	0	0	CH1_SEQ0_AGAIN			0	
0x75 p. 207	PGA_CTRL_AGAIN_CH1_1	0	0	0	0	0	CH1_SEQ1_AGAIN			0	

Address	Register	7	6	5	4	3	2	1	0
0x76 p. 207	PGA_CTRL_AGAIN_CH1_2	0	—	0	0	0	0	0	0
0x77 p. 208	PGA_CTRL_AGAIN_CH1_3	0	—	0	0	0	0	0	0
0x78 p. 208	PGA_CTRL_AGAIN_CH2_0	0	—	0	0	0	0	0	0
0x79 p. 208	PGA_CTRL_AGAIN_CH3_0	0	—	0	0	0	0	0	0
0x7A p. 208	PGA_CTRL_AGAIN_CH4_0	0	—	0	0	0	0	0	0

6.2 BANK1—DAC, PGA, BLC, SARADC

Address	Register	7	6	5	4	3	2	1	0
0x00 p. 131	BANK	DESCRIM				—	BANK		
		1	1	0	0	0	0	0	0
0x04 p. 132	ASYNC0_0	0	0	ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
		0	0	0	0	0	0	0	0
0x05 p. 133	ASYNC0_1	0	0	0	0	0	0	0	OSC_DISABLE
		0	0	0	0	0	0	0	0
0x08 p. 131	SFT_RESET	SFT_RESET							
		0	0	0	0	0	0	0	0
0x0E p. 202	DAC_CTRL_OFS1_CH2_2	0	0	0	0	0	0	0	0
0x0F p. 203	DAC_CTRL_OFS1_CH2_3	0	0	0	0	0	0	0	CH2_SEQ1_OFFSET_1
		0	0	0	0	0	0	0	1
0x12 p. 203	DAC_CTRL_OFS1_CH3_2	0	0	0	0	0	0	0	0
0x13 p. 203	DAC_CTRL_OFS1_CH3_3	0	0	0	0	0	0	0	CH3_SEQ1_OFFSET_1
		0	0	0	0	0	0	0	1
0x16 p. 203	DAC_CTRL_OFS1_CH4_2	0	0	0	0	0	0	0	0
0x17 p. 204	DAC_CTRL_OFS1_CH4_3	0	0	0	0	0	0	0	CH4_SEQ1_OFFSET_1
		0	0	0	0	0	0	0	1
0x20 p. 204	DAC_CTRL_OFS23_CH2_0	0	0	0	0	0	0	0	0
0x21 p. 204	DAC_CTRL_OFS23_CH2_1	0	0	0	0	0	0	0	CH2_SEQ2_OFFSET_1
		0	0	0	0	0	0	0	1
0x22 p. 204	DAC_CTRL_OFS23_CH2_2	0	0	0	0	0	0	0	0
0x23 p. 205	DAC_CTRL_OFS23_CH2_3	0	0	0	0	0	0	0	CH2_SEQ3_OFFSET_1
		0	0	0	0	0	0	0	1
0x24 p. 205	DAC_CTRL_OFS23_CH3_0	0	0	0	0	0	0	0	0
0x25 p. 205	DAC_CTRL_OFS23_CH3_1	0	0	0	0	0	0	0	CH3_SEQ2_OFFSET_1
		0	0	0	0	0	0	0	1

Address	Register	7	6	5	4	3	2	1	0	
0x26 p. 205	DAC_CTRL_OFS23_CH3_2	0			CH3_SEQ3_OFFSET_0			0		
0x27 p. 206	DAC_CTRL_OFS23_CH3_3	0			—			CH3_SEQ3_OFFSET_1		1
0x28 p. 206	DAC_CTRL_OFS23_CH4_0	0			CH4_SEQ2_OFFSET_0			0		
0x29 p. 206	DAC_CTRL_OFS23_CH4_1	0			—			CH4_SEQ2_OFFSET_1		1
0x2A p. 206	DAC_CTRL_OFS23_CH4_2	0			CH4_SEQ3_OFFSET_0			0		
0x2B p. 207	DAC_CTRL_OFS23_CH4_3	0			—			CH4_SEQ3_OFFSET_1		1
0x35 p. 209	PGA_CTRL_AGAIN_CH2_1	—		0		CH2_SEQ1_AGAIN		0		
0x36 p. 209	PGA_CTRL_AGAIN_CH2_2	—		0		CH2_SEQ2_AGAIN		0		
0x37 p. 209	PGA_CTRL_AGAIN_CH2_3	—		0		CH2_SEQ3_AGAIN		0		
0x39 p. 209	PGA_CTRL_AGAIN_CH3_1	—		0		CH3_SEQ1_AGAIN		0		
0x3A p. 210	PGA_CTRL_AGAIN_CH3_2	—		0		CH3_SEQ2_AGAIN		0		
0x3B p. 210	PGA_CTRL_AGAIN_CH3_3	—		0		CH3_SEQ3_AGAIN		0		
0x3D p. 210	PGA_CTRL_AGAIN_CH4_1	—		0		CH4_SEQ1_AGAIN		0		
0x3E p. 210	PGA_CTRL_AGAIN_CH4_2	—		0		CH4_SEQ2_AGAIN		0		
0x3F p. 211	PGA_CTRL_AGAIN_CH4_3	—		0		CH4_SEQ3_AGAIN		0		
0x48 p. 211	BLC_CTRL1_0	—	BLC_FINE_EVERYLINE	BLC_FINE_ACCUM	BLC_FINE_EN	—	BLC_COARSE_CYCLES			
0x49 p. 211	BLC_CTRL1_1	BLC_TRACKING			—		BLC_FRAME_START		0	
0x4A p. 212	BLC_CTRL1_2	BLC_LENGTH_0			0					
0x4B p. 212	BLC_CTRL1_3	—		BLC_TARGET_RANGE		—		BLC_LENGTH_1		
0x50 p. 212	BLC_TARGET_CH1_0	0			CH1_SEQ0_BLC_TARGET			0		
0x51 p. 212	BLC_TARGET_CH1_1	0			CH1_SEQ1_BLC_TARGET			0		
0x52 p. 212	BLC_TARGET_CH1_2	0			CH1_SEQ2_BLC_TARGET			0		
0x53 p. 213	BLC_TARGET_CH1_3	0			CH1_SEQ3_BLC_TARGET			0		
0x54 p. 213	BLC_TARGET_CH2_0	0			CH2_SEQ0_BLC_TARGET			0		

Address	Register	7	6	5	4	3	2	1	0
0x55 p. 213	BLC_TARGET_CH2_1	0	0	0	CH2_SEQ1_BLC_TARGET		0	0	0
0x56 p. 213	BLC_TARGET_CH2_2	0	0	0	CH2_SEQ2_BLC_TARGET		0	0	0
0x57 p. 213	BLC_TARGET_CH2_3	0	0	0	CH2_SEQ3_BLC_TARGET		0	0	0
0x58 p. 213	BLC_TARGET_CH3_0	0	0	0	CH3_SEQ0_BLC_TARGET		0	0	0
0x59 p. 214	BLC_TARGET_CH3_1	0	0	0	CH3_SEQ1_BLC_TARGET		0	0	0
0x5A p. 214	BLC_TARGET_CH3_2	0	0	0	CH3_SEQ2_BLC_TARGET		0	0	0
0x5B p. 214	BLC_TARGET_CH3_3	0	0	0	CH3_SEQ3_BLC_TARGET		0	0	0
0x5C p. 214	BLC_TARGET_CH4_0	0	0	0	CH4_SEQ0_BLC_TARGET		0	0	0
0x5D p. 214	BLC_TARGET_CH4_1	0	0	0	CH4_SEQ1_BLC_TARGET		0	0	0
0x5E p. 214	BLC_TARGET_CH4_2	0	0	0	CH4_SEQ2_BLC_TARGET		0	0	0
0x5F p. 215	BLC_TARGET_CH4_3	0	0	0	CH4_SEQ3_BLC_TARGET		0	0	0
0x69 p. 217	SAR1_CTRL_1	0	0	—	0	0	CH1_POL	—	0
0x6B p. 217	SAR1_CTRL_3	0	0	—	0	0	0	CH1_AFE_POWER	1
0x6D p. 217	SAR2_CTRL_1	0	0	—	0	0	CH2_POL	—	0
0x6F p. 218	SAR2_CTRL_3	0	0	—	0	0	0	CH2_AFE_POWER	1
0x71 p. 218	SAR3_CTRL_1	0	0	—	0	0	CH3_POL	—	0
0x73 p. 218	SAR3_CTRL_3	0	0	—	0	0	0	CH3_AFE_POWER	1
0x75 p. 218	SAR4_CTRL_1	0	0	—	0	0	CH4_POL	—	0
0x77 p. 219	SAR4_CTRL_3	0	0	—	0	0	0	CH4_AFE_POWER	1

6.3 BANK2—Timing Gen

Address	Register	7	6	5	4	3	2	1	0
0x00 p. 131	BANK	DESCRIM				—	BANK		
0x04 p. 132	ASYNC0_0	—	0	ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
0x05 p. 133	ASYNC0_1	0	0	0	0	0	0	0	OSC_DISABLE

Address	Register	7	6	5	4	3	2	1	0	
0x08 p. 131	SFT_RESET	SFT_RESET								
		0	0	0	0	0	0	0	0	
0x0C p. 141	TG_STATUS	---						SEQ_STATE_STS		
		0	0	0	0	0	0	0	0	
0x10 p. 141	TG_CONFIG2_0	---		LEDSTART_POL	LEDSTART_SEQ_INIT	TGSYNC_ASYNC	TGSYNC_IN_POL	TGSYNC_IN_SRC		
		0	0	0	0	0	1	0	0	
0x11 p. 142	TG_CONFIG2_1	---	TGSYNC_OUT_DUR			TGSYNC_IN_OFFSET				
		0	0	1	0	0	0	0	0	
0x12 p. 142	TG_CONFIG2_2	---	TGSYNC_FILTER_STAGE			TGSYNC_FILTER_DECM			TGSYNC_FILTER_EN	
		0	1	0	0	0	1	1	0	
0x13 p. 142	TG_CONFIG2_3	---		TP_SEC_OFFSET						
		0	0	0	0	0	0	0	0	
0x14 p. 143	TG_CONFIG3_0	LEDG_PO_SEL				LEDR_PO_SEL				
		0	0	0	1	0	0	0	0	
0x15 p. 143	TG_CONFIG3_1	DC_PO_2ND_PULSE	NUM_DC_PO			LEDB_PO_SEL				
		0	0	0	0	0	0	1	0	
0x16 p. 144	TG_CONFIG3_2	FLAG_DEN2_PO_SEL				FLAG_DEN1_PO_SEL				
		1	0	0	1	1	0	0	1	
0x17 p. 144	TG_CONFIG3_3	---		FLAG_PIX2_PO_EDGE		FLAG_PIX2_PO_SEL				
		0	0	0	0	1	0	1	0	
0x18 p. 144	SEQ_DURATION0_0	SEQ_STATE0_LEN_0								
		0	0	0	0	0	0	0	0	
0x19 p. 144	SEQ_DURATION0_1	SEQ_STATE0_LEN_1								
		0	0	0	0	1	0	0	0	
0x1A p. 145	SEQ_DURATION0_2	SEQ_STATE1_LEN_0								
		0	0	0	0	0	0	0	0	
0x1B p. 145	SEQ_DURATION0_3	SEQ_STATE1_LEN_1								
		0	0	0	0	1	0	0	0	
0x1C p. 145	SEQ_DURATION1_0	SEQ_STATE2_LEN_0								
		0	0	0	0	0	0	0	0	
0x1D p. 145	SEQ_DURATION1_1	SEQ_STATE2_LEN_1								
		0	0	0	0	1	0	0	0	
0x1E p. 145	SEQ_DURATION1_2	SEQ_STATE3_LEN_0								
		0	0	0	0	0	0	0	0	
0x1F p. 145	SEQ_DURATION1_3	SEQ_STATE3_LEN_1								
		0	0	0	0	1	0	0	0	
0x20 p. 146	TG_TIMING_CFG0_0	CK_MASK1_START_0								
		0	0	0	0	0	0	0	0	
0x21 p. 146	TG_TIMING_CFG0_1	CK_MASK1_START_1								
		0	0	0	0	0	0	0	0	
0x22 p. 146	TG_TIMING_CFG0_2	CK_MASK1_END_0								
		0	0	0	0	0	0	0	0	
0x23 p. 146	TG_TIMING_CFG0_3	CK_MASK1_END_1								
		0	0	0	0	0	0	0	0	
0x24 p. 146	TG_TIMING_CFG1_0	CK_MASK2_START_0								
		0	0	0	0	0	0	0	0	
0x25 p. 147	TG_TIMING_CFG1_1	CK_MASK2_START_1								
		0	0	0	0	0	0	0	0	
0x26 p. 147	TG_TIMING_CFG1_2	CK_MASK2_END_0								
		0	0	0	0	0	0	0	0	
0x27 p. 147	TG_TIMING_CFG1_3	CK_MASK2_END_1								
		0	0	0	0	0	0	0	0	

Address	Register	7	6	5	4	3	2	1	0
0x2C p. 147	TG_TIMING_CFG3_0	CLAMP_START_0							
		0	0	0	0	0	0	0	0
0x2D p. 147	TG_TIMING_CFG3_1	CLAMP_START_1							
		0	0	0	0	0	0	0	0
0x2E p. 148	TG_TIMING_CFG3_2	CLAMP_END_0							
		0	0	0	0	0	0	0	0
0x2F p. 148	TG_TIMING_CFG3_3	CLAMP_END_1							
		0	0	0	0	0	0	0	0
0x34 p. 148	TG_TIMING_CFG5_0	FLAG_PIX1_PIXEL1_0							
		1	1	1	1	1	1	1	1
0x35 p. 148	TG_TIMING_CFG5_1	FLAG_PIX1_PIXEL1_1							
		1	1	1	1	1	1	1	1
0x36 p. 148	TG_TIMING_CFG5_2	FLAG_PIX1_PIXEL2_0							
		1	1	1	1	1	1	1	1
0x37 p. 149	TG_TIMING_CFG5_3	FLAG_PIX1_PIXEL2_1							
		1	1	1	1	1	1	1	1
0x38 p. 149	TG_TIMING_CFG6_0	FLAG_PIX1_PIXEL3_0							
		1	1	1	1	1	1	1	1
0x39 p. 149	TG_TIMING_CFG6_1	FLAG_PIX1_PIXEL3_1							
		1	1	1	1	1	1	1	1
0x3A p. 149	TG_TIMING_CFG6_2	FLAG_PIX1_PIXEL4_0							
		1	1	1	1	1	1	1	1
0x3B p. 149	TG_TIMING_CFG6_3	FLAG_PIX1_PIXEL4_1							
		1	1	1	1	1	1	1	1
0x3C p. 150	TG_TIMING_CFG7_0	—	ACYC_PO_POL	ACYC_PO_SEL				ACYC_MODE	ACYC_EN
		0	0	0	0	0	0	0	
0x3D p. 150	TG_TIMING_CFG7_1	ACYC_DELAY							
		0	0	0	0	0	0	0	
0x3E p. 150	TG_TIMING_CFG7_2	BLC_START_0							
		0	0	0	0	0	0	0	
0x3F p. 150	TG_TIMING_CFG7_3	BLC_START_1							
		0	0	0	0	0	0	0	
0x40 p. 151	TG_TIMING_CFG8_0	PO7_INIT_LVL	PO6_INIT_LVL	PO5_INIT_LVL	PO4_INIT_LVL	PO3_INIT_LVL	PO2_INIT_LVL	PO1_INIT_LVL	PO0_INIT_LVL
		0	0	0	0	0	0	0	0
0x41 p. 151	TG_TIMING_CFG8_1	—			CK_TOG2_INIT_LVL	CK_TOG1_INIT_LVL	PO10_INIT_LVL	PO9_INIT_LVL	PO8_INIT_LVL
		0	0	0	0	0	0	0	
0x42 p. 152	TG_TIMING_CFG8_2	FIFO_RESET_DLY	PO10_DC_INIT_LVL	PO9_DC_INIT_LVL	PO8_DC_INIT_LVL	PO7_DC_INIT_LVL	PO6_DC_INIT_LVL	PO5_DC_INIT_LVL	PGEN_CNT_SEL
		1	0	0	0	0	0	0	1
0x43 p. 152	TG_TIMING_CFG8_3	FIFO_BLANK_DUR					—		FIFO_RESET_CTRL
		1	1	0	0	1	0	0	
0x44 p. 152	TG_POLARITY_T1_0	CK_TOG1_TP_POL_0							
		0	0	0	0	0	0	0	
0x45 p. 153	TG_POLARITY_T1_1	CK_TOG1_TP_POL_1							
		0	0	0	0	0	0	0	
0x46 p. 153	TG_POLARITY_T1_2	CK_TOG1_TP_POL_2							
		0	0	0	0	0	0	0	
0x47 p. 153	TG_POLARITY_T1_3	CK_TOG1_TP_POL_3							
		0	0	0	0	0	0	0	
0x48 p. 153	TG_POLARITY_T2_0	CK_TOG2_TP_POL_0							
		0	0	0	0	0	0	0	
0x49 p. 153	TG_POLARITY_T2_1	CK_TOG2_TP_POL_1							
		0	0	0	0	0	0	0	

Address	Register	7	6	5	4	3	2	1	0
0x4A p. 153	TG_POLARITY_T2_2	0	0	0	0	0	0	0	0
0x4B p. 154	TG_POLARITY_T2_3	0	0	0	0	0	0	0	0
0x50 p. 154	TG_POLARITY_PO0_0	0	0	0	0	0	0	0	0
0x51 p. 154	TG_POLARITY_PO0_1	0	0	0	0	0	0	0	0
0x52 p. 154	TG_POLARITY_PO0_2	0	0	0	0	0	0	0	0
0x53 p. 154	TG_POLARITY_PO0_3	0	0	0	0	0	0	0	0
0x54 p. 154	TG_POLARITY_PO1_0	0	0	0	0	0	0	0	0
0x55 p. 155	TG_POLARITY_PO1_1	0	0	0	0	0	0	0	0
0x56 p. 155	TG_POLARITY_PO1_2	0	0	0	0	0	0	0	0
0x57 p. 155	TG_POLARITY_PO1_3	0	0	0	0	0	0	0	0
0x58 p. 155	TG_POLARITY_PO2_0	0	0	0	0	0	0	0	0
0x59 p. 155	TG_POLARITY_PO2_1	0	0	0	0	0	0	0	0
0x5A p. 155	TG_POLARITY_PO2_2	0	0	0	0	0	0	0	0
0x5B p. 156	TG_POLARITY_PO2_3	0	0	0	0	0	0	0	0
0x5C p. 156	TG_POLARITY_PO3_0	0	0	0	0	0	0	0	0
0x5D p. 156	TG_POLARITY_PO3_1	0	0	0	0	0	0	0	0
0x5E p. 156	TG_POLARITY_PO3_2	0	0	0	0	0	0	0	0
0x5F p. 156	TG_POLARITY_PO3_3	0	0	0	0	0	0	0	0
0x60 p. 156	TG_POLARITY_PO4_0	0	0	0	0	0	0	0	0
0x61 p. 157	TG_POLARITY_PO4_1	0	0	0	0	0	0	0	0
0x62 p. 157	TG_POLARITY_PO4_2	0	0	0	0	0	0	0	0
0x63 p. 157	TG_POLARITY_PO4_3	0	0	0	0	0	0	0	0
0x64 p. 157	TG_POLARITY_PO5_0	0	0	0	0	0	0	0	0
0x65 p. 157	TG_POLARITY_PO5_1	0	0	0	0	0	0	0	0
0x66 p. 158	TG_POLARITY_PO5_2	0	0	0	0	0	0	0	0
0x67 p. 158	TG_POLARITY_PO5_3	0	0	0	0	0	0	0	0
0x68 p. 158	TG_POLARITY_PO6_0	0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0	
0x69 p. 158	TG_POLARITY_PO6_1	P06_TP_POL_1								
		0	0	0	0	0	0	0	0	
0x6A p. 158	TG_POLARITY_PO6_2	P06_TP_POL_2								
		0	0	0	0	0	0	0	0	
0x6B p. 159	TG_POLARITY_PO6_3	P06_TP_POL_3								
		0	0	0	0	0	0	0	0	
0x6C p. 159	TG_POLARITY_PO7_0	P07_TP_POL_0								
		0	0	0	0	0	0	0	0	
0x6D p. 159	TG_POLARITY_PO7_1	P07_TP_POL_1								
		0	0	0	0	0	0	0	0	
0x6E p. 159	TG_POLARITY_PO7_2	P07_TP_POL_2								
		0	0	0	0	0	0	0	0	
0x6F p. 159	TG_POLARITY_PO7_3	P07_TP_POL_3								
		0	0	0	0	0	0	0	0	
0x70 p. 160	TG_POLARITY_PO8_0	P08_TP_POL_0								
		0	0	0	0	0	0	0	0	
0x71 p. 160	TG_POLARITY_PO8_1	P08_TP_POL_1								
		0	0	0	0	0	0	0	0	
0x72 p. 160	TG_POLARITY_PO8_2	P08_TP_POL_2								
		0	0	0	0	0	0	0	0	
0x73 p. 160	TG_POLARITY_PO8_3	P08_TP_POL_3								
		0	0	0	0	0	0	0	0	
0x74 p. 160	TG_POLARITY_PO9_0	P09_TP_POL_0								
		0	0	0	0	0	0	0	0	
0x75 p. 161	TG_POLARITY_PO9_1	P09_TP_POL_1								
		0	0	0	0	0	0	0	0	
0x76 p. 161	TG_POLARITY_PO9_2	P09_TP_POL_2								
		0	0	0	0	0	0	0	0	
0x77 p. 161	TG_POLARITY_PO9_3	P09_TP_POL_3								
		0	0	0	0	0	0	0	0	
0x78 p. 161	TG_POLARITY_PO10_0	P010_TP_POL_0								
		0	0	0	0	0	0	0	0	
0x79 p. 161	TG_POLARITY_PO10_1	P010_TP_POL_1								
		0	0	0	0	0	0	0	0	
0x7A p. 162	TG_POLARITY_PO10_2	P010_TP_POL_2								
		0	0	0	0	0	0	0	0	
0x7B p. 162	TG_POLARITY_PO10_3	P010_TP_POL_3								
		0	0	0	0	0	0	0	0	
0x7C p. 162	TG_REFCNT_SEL_0	—					CLAMP_CNT_SEL	BLC_CNT_SEL	FLAG_PIX1_CNT_SEL	
		0	0	0	0	0	0	0	0	
0x7D p. 162	TG_REFCNT_SEL_1	—			CK_TOG2_CNT_SEL	CK_TOG1_CNT_SEL	—	CK_MASK2_CNT_SEL	CK_MASK1_CNT_SEL	
		0	0	0	0	0	0	0	0	
0x7E p. 163	TG_REFCNT_SEL_2	PO7_CNT_SEL	PO6_CNT_SEL	PO5_CNT_SEL	PO4_CNT_SEL	PO3_CNT_SEL	PO2_CNT_SEL	PO1_CNT_SEL	PO0_CNT_SEL	
		0	0	0	0	0	0	0	0	
0x7F p. 163	TG_REFCNT_SEL_3	—					PO10_CNT_SEL	PO9_CNT_SEL	PO8_CNT_SEL	
		0	0	0	0	0	0	0	0	

6.4 BANK3—Timing Gen, Test Pattern Gen

Address	Register	7	6	5	4	3	2	1	0	
0x00 p. 131	BANK	DESCRIM					—	BANK		
		1	1	0	0	0	0	0	0	

Address	Register	7	6	5	4	3	2	1	0
0x04 p. 132	ASYNC0_0	—		ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
		0	0	0	0	0	0	0	0
0x05 p. 133	ASYNC0_1				—				OSC_DISABLE
		0	0	0	0	0	0	0	0
0x08 p. 131	SFT_RESET	SFT_RESET							
		0	0	0	0	0	0	0	0
0x0C p. 164	TG_CYCPAT_CFG0_0		BLC_SEQ_SEL				FLAG_PIX1_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x0D p. 164	TG_CYCPAT_CFG0_1		—				CLAMP_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x0E p. 164	TG_CYCPAT_CFG0_2		CK_MASK2_SEQ_SEL				CK_MASK1_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x10 p. 165	TG_CYCPAT_CFG1_0		CK_TOG2_SEQ_SEL				CK_TOG1_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x11 p. 165	TG_CYCPAT_CFG1_1		PO0_SEQ_SEL				—		
		0	0	0	0	0	0	0	0
0x12 p. 165	TG_CYCPAT_CFG1_2		PO2_SEQ_SEL				PO1_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x13 p. 166	TG_CYCPAT_CFG1_3		—				PO3_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x14 p. 166	TG_CYCPAT_CFG2_0		PO5_SEQ_SEL				PO4_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x15 p. 166	TG_CYCPAT_CFG2_1		PO7_SEQ_SEL				PO6_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x16 p. 167	TG_CYCPAT_CFG2_2		PO9_SEQ_SEL				PO8_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x17 p. 167	TG_CYCPAT_CFG2_3		—				PO10_SEQ_SEL		
		0	0	0	0	0	0	0	0
0x18 p. 167	TG_TOGGLE_POINT0_0		TP0_PIXEL_0						
		0	0	0	0	0	0	0	0
0x19 p. 167	TG_TOGGLE_POINT0_1		TP0_PIXEL_1						
		0	0	0	0	0	0	0	0
0x1A p. 168	TG_TOGGLE_POINT0_2		TP1_PIXEL_0						
		0	0	0	0	0	0	0	0
0x1B p. 168	TG_TOGGLE_POINT0_3		TP1_PIXEL_1						
		0	0	0	0	0	0	0	0
0x1C p. 168	TG_TOGGLE_POINT1_0		TP2_PIXEL_0						
		0	0	0	0	0	0	0	0
0x1D p. 168	TG_TOGGLE_POINT1_1		TP2_PIXEL_1						
		0	0	0	0	0	0	0	0
0x1E p. 168	TG_TOGGLE_POINT1_2		TP3_PIXEL_0						
		0	0	0	0	0	0	0	0
0x1F p. 168	TG_TOGGLE_POINT1_3		TP3_PIXEL_1						
		0	0	0	0	0	0	0	0
0x20 p. 169	TG_TOGGLE_POINT2_0		TP4_PIXEL_0						
		0	0	0	0	0	0	0	0
0x21 p. 169	TG_TOGGLE_POINT2_1		TP4_PIXEL_1						
		0	0	0	0	0	0	0	0
0x22 p. 169	TG_TOGGLE_POINT2_2		TP5_PIXEL_0						
		0	0	0	0	0	0	0	0
0x23 p. 169	TG_TOGGLE_POINT2_3		TP5_PIXEL_1						
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x24 p. 169	TG_TOGGLE_POINT3_0	0	0	0	0	0	0	0	0
0x25 p. 169	TG_TOGGLE_POINT3_1	0	0	0	0	0	0	0	0
0x26 p. 170	TG_TOGGLE_POINT3_2	0	0	0	0	0	0	0	0
0x27 p. 170	TG_TOGGLE_POINT3_3	0	0	0	0	0	0	0	0
0x28 p. 170	TG_TOGGLE_POINT4_0	0	0	0	0	0	0	0	0
0x29 p. 170	TG_TOGGLE_POINT4_1	0	0	0	0	0	0	0	0
0x2A p. 170	TG_TOGGLE_POINT4_2	0	0	0	0	0	0	0	0
0x2B p. 170	TG_TOGGLE_POINT4_3	0	0	0	0	0	0	0	0
0x2C p. 171	TG_TOGGLE_POINT5_0	0	0	0	0	0	0	0	0
0x2D p. 171	TG_TOGGLE_POINT5_1	0	0	0	0	0	0	0	0
0x2E p. 171	TG_TOGGLE_POINT5_2	0	0	0	0	0	0	0	0
0x2F p. 171	TG_TOGGLE_POINT5_3	0	0	0	0	0	0	0	0
0x30 p. 171	TG_TOGGLE_POINT6_0	0	0	0	0	0	0	0	0
0x31 p. 171	TG_TOGGLE_POINT6_1	0	0	0	0	0	0	0	0
0x32 p. 172	TG_TOGGLE_POINT6_2	0	0	0	0	0	0	0	0
0x33 p. 172	TG_TOGGLE_POINT6_3	0	0	0	0	0	0	0	0
0x34 p. 172	TG_TOGGLE_POINT7_0	0	0	0	0	0	0	0	0
0x35 p. 172	TG_TOGGLE_POINT7_1	0	0	0	0	0	0	0	0
0x36 p. 172	TG_TOGGLE_POINT7_2	0	0	0	0	0	0	0	0
0x37 p. 172	TG_TOGGLE_POINT7_3	0	0	0	0	0	0	0	0
0x38 p. 173	TG_TOGGLE_POINT8_0	0	0	0	0	0	0	0	0
0x39 p. 173	TG_TOGGLE_POINT8_1	0	0	0	0	0	0	0	0
0x3A p. 173	TG_TOGGLE_POINT8_2	0	0	0	0	0	0	0	0
0x3B p. 173	TG_TOGGLE_POINT8_3	0	0	0	0	0	0	0	0
0x3C p. 173	TG_TOGGLE_POINT9_0	0	0	0	0	0	0	0	0
0x3D p. 173	TG_TOGGLE_POINT9_1	0	0	0	0	0	0	0	0
0x3E p. 174	TG_TOGGLE_POINT9_2	0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x3F p. 174	TG_TOGGLE_POINT9_3	0	0	0	0	0	0	0	0
0x40 p. 174	TG_TOGGLE_POINT10_0	0	0	0	0	0	0	0	0
0x41 p. 174	TG_TOGGLE_POINT10_1	0	0	0	0	0	0	0	0
0x42 p. 174	TG_TOGGLE_POINT10_2	0	0	0	0	0	0	0	0
0x43 p. 175	TG_TOGGLE_POINT10_3	0	0	0	0	0	0	0	0
0x44 p. 175	TG_TOGGLE_POINT11_0	0	0	0	0	0	0	0	0
0x45 p. 175	TG_TOGGLE_POINT11_1	0	0	0	0	0	0	0	0
0x46 p. 175	TG_TOGGLE_POINT11_2	0	0	0	0	0	0	0	0
0x47 p. 175	TG_TOGGLE_POINT11_3	0	0	0	0	0	0	0	0
0x48 p. 176	TG_TOGGLE_POINT12_0	0	0	0	0	0	0	0	0
0x49 p. 176	TG_TOGGLE_POINT12_1	0	0	0	0	0	0	0	0
0x4A p. 176	TG_TOGGLE_POINT12_2	0	0	0	0	0	0	0	0
0x4B p. 176	TG_TOGGLE_POINT12_3	0	0	0	0	0	0	0	0
0x4C p. 176	TG_TOGGLE_POINT13_0	0	0	0	0	0	0	0	0
0x4D p. 177	TG_TOGGLE_POINT13_1	0	0	0	0	0	0	0	0
0x4E p. 177	TG_TOGGLE_POINT13_2	0	0	0	0	0	0	0	0
0x4F p. 177	TG_TOGGLE_POINT13_3	0	0	0	0	0	0	0	0
0x50 p. 177	TG_TOGGLE_POINT14_0	0	0	0	0	0	0	0	0
0x51 p. 177	TG_TOGGLE_POINT14_1	0	0	0	0	0	0	0	0
0x52 p. 178	TG_TOGGLE_POINT14_2	0	0	0	0	0	0	0	0
0x53 p. 178	TG_TOGGLE_POINT14_3	0	0	0	0	0	0	0	0
0x54 p. 178	TG_TOGGLE_POINT15_0	0	0	0	0	0	0	0	0
0x55 p. 178	TG_TOGGLE_POINT15_1	0	0	0	0	0	0	0	0
0x56 p. 178	TG_TOGGLE_POINT15_2	0	0	0	0	0	0	0	0
0x57 p. 179	TG_TOGGLE_POINT15_3	0	0	0	0	0	0	0	0
0x58 p. 179	TG_OUTMUX_CFG0_0	PCK1_PO_SEL			PCK1_DLY		CLKOUT1_POL	CLKOUT1_EN	
		0	0	0	0	0	0	0	0
0x59 p. 179	TG_OUTMUX_CFG0_1	PCK2_PO_SEL			PCK2_DLY		CLKOUT2_POL	CLKOUT2_EN	
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x5A p. 180	TG_OUTMUX_CFG0_2	PCK3_PO_SEL			PCK3_DLY		CLKOUT3_POL	CLKOUT3_EN	
		0	0	0	0	0	0	0	0
0x5B p. 180	TG_OUTMUX_CFG0_3	PCK4_PO_SEL			PCK4_DLY		CLKOUT4_POL	CLKOUT4_EN	
		0	0	0	0	0	0	0	0
0x63 p. 180	TG_OUTMUX_CFG2_3	—				CLKOUT4_SRC	CLKOUT3_SRC	CLKOUT2_SRC	CLKOUT1_SRC
		0	0	0	0	0	0	0	0
0x64 p. 181	DLL_CFG1_0	—		DLL_RSMP_RISE					
		0	0	1	0	0	0	0	0
0x65 p. 181	DLL_CFG1_1	—		DLL_RSMP_FALL					
		0	0	1	0	0	1	1	0
0x66 p. 181	DLL_CFG1_2	—		DLL_VSMP_RISE					
		0	0	1	0	1	0	0	0
0x67 p. 182	DLL_CFG1_3	—		DLL_VSMP_FALL					
		0	0	0	0	1	0	0	0
0x68 p. 182	DLL_CFG2_0	—		DLL_CK1_RISE					
		0	0	0	0	1	0	1	0
0x69 p. 182	DLL_CFG2_1	DLL_CK1_DIV	—	DLL_CK1_FALL					
		0	0	0	1	1	0	0	1
0x6A p. 182	DLL_CFG2_2	—		DLL_CK2_RISE					
		0	0	0	1	1	0	0	1
0x6B p. 183	DLL_CFG2_3	DLL_CK2_DIV	—	DLL_CK2_FALL					
		0	0	1	0	1	0	0	0
0x6C p. 183	DLL_CFG3_0	—		DLL_CK3_RISE					
		0	0	1	0	1	0	0	0
0x6D p. 183	DLL_CFG3_1	DLL_CK3_DIV	—	DLL_CK3_FALL					
		0	0	0	0	1	0	1	0
0x6E p. 183	DLL_CFG3_2	—		DLL_CK4_RISE					
		0	0	0	0	0	0	0	0
0x6F p. 184	DLL_CFG3_3	DLL_CK4_DIV	—	DLL_CK4_FALL					
		0	0	0	0	0	0	0	0
0x74 p. 184	DLL_CFG5_0	—		DLL_TGCKO_RISE					
		0	0	1	1	0	1	1	1
0x75 p. 184	DLL_CFG5_1	—		DLL_AFECK_DUR					
		0	0	0	1	0	1	1	0
0x78 p. 227	PGCONFIG_0	PGEN_MARCH	PGEN_PATT_SEL		PGEN_INV	—			PGEN_EN
		0	0	0	0	0	0	0	0
0x7A p. 228	PGCONFIG_2	PGEN_LVL_0							
		0	0	0	0	0	0	0	0
0x7B p. 228	PGCONFIG_3	PGEN_LVL_1							
		0	0	0	0	0	0	0	0
0x7C p. 228	PGWIDTH_0	PGEN_WIDTH1							
		0	0	0	0	0	0	0	0
0x7D p. 228	PGWIDTH_1	PGEN_WIDTH2							
		0	0	0	0	0	0	0	0

6.5 BANK6—PAD I/O, LED Control, PLL1

Address	Register	7	6	5	4	3	2	1	0	
0x00 p. 131	BANK	DESCRIM				—	BANK			
		1	1	0	0	0	0	0	0	

Address	Register	7	6	5	4	3	2	1	0
0x04 p. 132	ASYNC0_0	—	—	ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
		0	0	0	0	0	0	0	0
0x05 p. 133	ASYNC0_1	—	—	—	—	—	—	—	OSC_DISABLE
		0	0	0	0	0	0	0	0
0x08 p. 131	SFT_RESET	SFT_RESET							
		0	0	0	0	0	0	0	0
0x0C p. 188	GPI_VAL_0	—	—	—	GP4_IN_STS	GP3_IN_STS	GP2_IN_STS	GP1_IN_STS	GP12_IN_STS
		X	X	X	X	X	X	X	X
0x0E p. 188	GPI_VAL_2	—	—	—	—	GP4_DIR	GP3_DIR	GP2_DIR	GP1_DIR
		0	0	0	0	0	0	0	0
0x0F p. 189	GPI_VAL_3	—	—	—	—	GP4_OUT_LVL	GP3_OUT_LVL	GP2_OUT_LVL	GP1_OUT_LVL
		0	0	0	0	0	0	0	0
0x10 p. 189	LVDS_CFG	—	—	—	—	—	—	LVDS_VREF_SEL	—
		0	0	0	0	0	0	0	1
0x18 p. 189	CMOS_CFG_0	—	SPI_SDO_I2C_SCL_DRV_STR			SPI_SDO_I2C_SCL_PULL		SPI_MISO_I2C_SCL_HIZ_EN	SPI_MISO_I2C_SCL_IE
		0	0	0	1	1	0	0	1
0x19 p. 190	CMOS_CFG_1	—	SPI_MOSI_I2C_SDA_DRV_STR			SPI_MOSI_I2C_SDA_PULL		SPI_MOSI_I2C_SDA_HIZ_EN	SPI_MOSI_I2C_SDA_IE
		0	0	0	1	1	0	0	1
0x1A p. 190	CMOS_CFG_2	—	—	—	—	SPI_SCK_PULL		—	SPI_SCK_IE
		0	0	0	1	1	0	0	1
0x1B p. 190	CMOS_CFG_3	—	—	—	—	SPI_CS_PULL		—	SPI_CS_IE
		0	0	0	1	1	0	0	1
0x1C p. 191	MCLK_CFG_0	—	MCLK_LVDS_RT_EN	—					
		0	0	1	0	0	0	0	0
0x1D p. 191	MCLK_CFG_1	—	—	—	—	MCLK_EXT_MCLK_EXT_P_PULL		MCLK_EXT_MCLK_EXT_P_HIZ_EN	MCLK_EXT_MCLK_EXT_P_IE
		0	0	0	1	1	0	0	1
0x1E p. 191	MCLK_CFG_2	—	—	—	—	MCLK_EXT_N_GPI12_PULL		MCLK_EXT_N_GPI12_HIZ_EN	MCLK_EXT_N_GPI12_IE
		0	0	0	1	1	0	0	1
0x20 p. 192	CLKOUT1_4_CFG_0	—	CLKOUT1_LEDR_EN_TGSYNC2_GPI01_DRV_STR			CLKOUT1_LEDR_EN_TGSYNC2_GPI01_PULL		CLKOUT1_LEDR_EN_TGSYNC2_GPI01_HIZ_EN	CLKOUT1_LEDR_EN_TGSYNC2_GPI01_IE
		0	0	0	1	1	0	0	1
0x21 p. 192	CLKOUT1_4_CFG_1	—	CLKOUT2_LEDG_EN_LEDSTART_GPI02_DRV_STR			CLKOUT2_LEDG_EN_LEDSTART_GPI02_PULL		CLKOUT2_LEDG_EN_LEDSTART_GPI02_HIZ_EN	CLKOUT2_LEDG_EN_LEDSTART_GPI02_IE
		0	0	0	1	1	0	0	1
0x22 p. 192	CLKOUT1_4_CFG_2	—	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPI03_DRV_STR			CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPI03_PULL		CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPI03_HIZ_EN	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPI03_IE
		0	0	0	1	1	0	0	1
0x23 p. 193	CLKOUT1_4_CFG_3	—	CLKOUT4_GPI04_DRV_STR			CLKOUT4_GPI04_PULL		CLKOUT4_GPI04_HIZ_EN	CLKOUT4_GPI04_IE
		0	0	0	1	1	0	0	1
0x2C p. 193	TGSYNC1_VSMP_EXT_CFG	—	TGSYNC1_VSMP_EXT_DRV_STR			TGSYNC1_VSMP_EXT_PULL		TGSYNC1_VSMP_EXT_HIZ_EN	TGSYNC1_VSMP_EXT_IE
		0	0	0	1	1	0	0	1
0x30 p. 194	DOUT_CH1_CFG_0	—	DOUT1_P_DOUT1_DRV_STR			DOUT1_P_DOUT1_PULL		DOUT1_P_DOUT1_HIZ_EN	DOUT1_P_DOUT1_IE
		0	0	0	1	1	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x31 p. 194	DOUT_CH1_CFG_1	—	DOUT1_N_DOUT2_DRV_STR			DOUT1_N_DOUT2_PULL		DOUT1_N_DOUT2_HIZ_EN	DOUT1_N_DOUT2_IE
		0	0	0	1	1	0	0	0
0x32 p. 194	DCLKOUT_CFG_2	—				DCLKOUT_LVDS_TXDRV		DCLKOUT_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x34 p. 195	DOUT_CH2_CFG_0	—	DOUT2_P_DOUT3_DRV_STR			DOUT2_P_DOUT3_PULL		DOUT2_P_DOUT3_HIZ_EN	DOUT2_P_DOUT3_IE
		0	0	0	1	1	0	0	0
0x35 p. 195	DOUT_CH2_CFG_1	—	DOUT2_N_DOUT4_DRV_STR			DOUT2_N_DOUT4_PULL		DOUT2_N_DOUT4_HIZ_EN	DOUT2_N_DOUT4_IE
		0	0	0	1	1	0	0	0
0x36 p. 196	DOUT_CH1_CFG_2	—				DOUT1_LVDS_TXDRV		DOUT1_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x38 p. 196	DOUT_CH3_CFG_0	—	DOUT3_P_DOUT5_DRV_STR			DOUT3_P_DOUT5_PULL		DOUT3_P_DOUT5_HIZ_EN	DOUT3_P_DOUT5_IE
		0	0	0	1	1	0	0	0
0x39 p. 196	DOUT_CH3_CFG_1	—	DOUT3_N_DOUT6_DRV_STR			DOUT3_N_DOUT6_PULL		DOUT3_N_DOUT6_HIZ_EN	DOUT3_N_DOUT6_IE
		0	0	0	1	1	0	0	0
0x3A p. 197	DOUT_CH2_CFG_2	—				DOUT2_LVDS_TXDRV		DOUT2_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x3E p. 197	DOUT_CH3_CFG_2	—				DOUT3_LVDS_TXDRV		DOUT3_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x42 p. 197	DOUT_CH4_CFG_2	—				DOUT4_LVDS_TXDRV		DOUT4_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x44 p. 198	DCLKOUT_CFG_0	—	DCLKOUT_P_DCLKOUT1_DOUT7_DRV_STR			DCLKOUT_P_DCLKOUT1_DOUT7_PULL		DCLKOUT_P_DCLKOUT1_DOUT7_HIZ_EN	DCLKOUT_P_DCLKOUT1_DOUT7_IE
		0	0	0	1	1	0	0	0
0x45 p. 198	DCLKOUT_CFG_1	—	DCLKOUT_N_DCLKOUT2_DOUT8_DRV_STR			DCLKOUT_N_DCLKOUT2_DOUT8_PULL		DCLKOUT_N_DCLKOUT2_DOUT8_HIZ_EN	DCLKOUT_N_DCLKOUT2_DOUT8_IE
		0	0	0	1	1	0	0	0
0x46 p. 198	DOUT_CH5_CFG_2	—				DOUT5_LVDS_TXDRV		DOUT5_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x48 p. 228	LED_CTRL_CONFIG_0	—				LED_CTRL_SRC	LEDB_EN	LEDG_EN	LEDR_EN
		0	0	0	0	0	0	0	0
0x49 p. 229	LED_CTRL_CONFIG_1	—				LED_RAMP_TIME			
		0	0	0	0	0	0	0	0
0x4A p. 229	LED_CTRL_CONFIG_2	LED_RAMP_BOOST		LEDB_COARSE		LEDG_COARSE		LEDR_COARSE	
		0	0	0	0	0	0	0	0
0x4C p. 229	LEDX_FINE_0	LEDR_FINE							
		0	0	0	0	0	0	0	0
0x4D p. 230	LEDX_FINE_1	LEDG_FINE							
		0	0	0	0	0	0	0	0
0x4E p. 230	LEDX_FINE_2	LEDB_FINE							
		0	0	0	0	0	0	0	0
0x50 p. 230	LED_CTRL_STATUS	—			LED_MAX_CURRENT_ERR	LED_CTRL_SHORT_ERR	—		
		0	0	0	0	0	0	0	0
0x60 p. 230	DPLL1_DPLL_DIVIDER_CTRL_0	PLL1_OUTPUT1_DIV_0							—
		0	0	1	0	0	0	0	0
0x61 p. 231	DPLL1_DPLL_DIVIDER_CTRL_1	PLL1_VCO_RANGE				—		PLL1_OUTPUT1_DIV_1	
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x62 p. 231	DPLL1_DPLL_DIVIDER_CTRL_2	PLL1_OUTPUT2_DIV_0							PLL1_OUTPUT2_EN
		0	0	1	0	0	0	0	0
0x63 p. 231	DPLL1_DPLL_DIVIDER_CTRL_3	PLL1_REFCLK_DIV_RATIO				PLL1_REFCLK_DIV_BYPASS	—	PLL1_OUTPUT2_DIV_1	
		0	0	0	0	1	0	0	0
0x64 p. 231	DPLL1_DPLL_FEEDBACK_RATIO_0	PLL1_RATIO_0							
		0	0	0	0	0	0	0	0
0x65 p. 232	DPLL1_DPLL_FEEDBACK_RATIO_1	PLL1_RATIO_1							
		0	0	0	0	0	0	0	0
0x66 p. 232	DPLL1_DPLL_FEEDBACK_RATIO_2	PLL1_RATIO_2							
		0	0	0	1	0	0	0	0
0x67 p. 232	DPLL1_DPLL_FEEDBACK_RATIO_3	—	PLL1_MODE		PLL1_RATIO_3				
		0	0	0	0	0	0	0	0
0x68 p. 232	DPLL1_DPLL_FEATURES_0	PLL1_VCO_GAIN				PLL1_CP_IBIAS			PLL1_PHASE_DET_PAUSE_EN
		1	0	0	0	0	1	0	0
0x69 p. 232	DPLL1_DPLL_FEATURES_1	—				PLL1_FILTER			
		0	0	0	0	0	0	0	1

6.6 BANK7—Digital Gain

Address	Register	7	6	5	4	3	2	1	0
0x00 p. 131	BANK	DESCRIM				—	BANK		
		1	1	0	0	0	0	0	0
0x04 p. 132	ASYNC0_0	—	ACTIVE_ERROR_STS		TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
		0	0	0	0	0	0	0	0
0x05 p. 133	ASYNC0_1	—							OSC_DISABLE
		0	0	0	0	0	0	0	0
0x08 p. 131	SFT_RESET	SFT_RESET							
		0	0	0	0	0	0	0	0
0x0C p. 219	DGAIN_SEQ01_CH1_0	CH1_SEQ0_DGAIN_0							
		0	0	0	0	0	0	0	0
0x0D p. 219	DGAIN_SEQ01_CH1_1	—				CH1_SEQ0_DGAIN_1			
		0	0	0	0	1	0	0	0
0x0E p. 220	DGAIN_SEQ01_CH1_2	CH1_SEQ1_DGAIN_0							
		0	0	0	0	0	0	0	0
0x0F p. 220	DGAIN_SEQ01_CH1_3	—				CH1_SEQ1_DGAIN_1			
		0	0	0	0	1	0	0	0
0x10 p. 220	DGAIN_SEQ23_CH1_0	CH1_SEQ2_DGAIN_0							
		0	0	0	0	0	0	0	0
0x11 p. 220	DGAIN_SEQ23_CH1_1	—				CH1_SEQ2_DGAIN_1			
		0	0	0	0	1	0	0	0
0x12 p. 221	DGAIN_SEQ23_CH1_2	CH1_SEQ3_DGAIN_0							
		0	0	0	0	0	0	0	0
0x13 p. 221	DGAIN_SEQ23_CH1_3	—				CH1_SEQ3_DGAIN_1			
		0	0	0	0	1	0	0	0
0x14 p. 221	DGAIN_SEQ01_CH2_0	CH2_SEQ0_DGAIN_0							
		0	0	0	0	0	0	0	0
0x15 p. 221	DGAIN_SEQ01_CH2_1	—				CH2_SEQ0_DGAIN_1			
		0	0	0	0	1	0	0	0
0x16 p. 222	DGAIN_SEQ01_CH2_2	CH2_SEQ1_DGAIN_0							
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x17 p. 222	DGAIN_SEQ01_CH2_3	0	0	—	0	1	0	0	0
0x18 p. 222	DGAIN_SEQ23_CH2_0	0	0	0	0	0	0	0	0
0x19 p. 222	DGAIN_SEQ23_CH2_1	0	0	—	0	1	0	0	0
0x1A p. 223	DGAIN_SEQ23_CH2_2	0	0	0	0	0	0	0	0
0x1B p. 223	DGAIN_SEQ23_CH2_3	0	0	—	0	1	0	0	0
0x1C p. 223	DGAIN_SEQ01_CH3_0	0	0	0	0	0	0	0	0
0x1D p. 223	DGAIN_SEQ01_CH3_1	0	0	—	0	1	0	0	0
0x1E p. 224	DGAIN_SEQ01_CH3_2	0	0	0	0	0	0	0	0
0x1F p. 224	DGAIN_SEQ01_CH3_3	0	0	—	0	1	0	0	0
0x20 p. 224	DGAIN_SEQ23_CH3_0	0	0	0	0	0	0	0	0
0x21 p. 224	DGAIN_SEQ23_CH3_1	0	0	—	0	1	0	0	0
0x22 p. 225	DGAIN_SEQ23_CH3_2	0	0	0	0	0	0	0	0
0x23 p. 225	DGAIN_SEQ23_CH3_3	0	0	—	0	1	0	0	0
0x24 p. 225	DGAIN_SEQ01_CH4_0	0	0	0	0	0	0	0	0
0x25 p. 225	DGAIN_SEQ01_CH4_1	0	0	—	0	1	0	0	0
0x26 p. 226	DGAIN_SEQ01_CH4_2	0	0	0	0	0	0	0	0
0x27 p. 226	DGAIN_SEQ01_CH4_3	0	0	—	0	1	0	0	0
0x28 p. 226	DGAIN_SEQ23_CH4_0	0	0	0	0	0	0	0	0
0x29 p. 226	DGAIN_SEQ23_CH4_1	0	0	—	0	1	0	0	0
0x2A p. 227	DGAIN_SEQ23_CH4_2	0	0	0	0	0	0	0	0
0x2B p. 227	DGAIN_SEQ23_CH4_3	0	0	—	0	1	0	0	0

7 Register Quick Reference—Flat Register Mode (I²C or SPI)

This section gives an overview of the control port registers. Refer to the following bit definition tables for bit assignment information.

- This register view is for the CS82L44 4-channel imaging AFE/ADC, using the flat host-interface configuration.
- The register field default values are established on power-up and after soft reset.
- A "—" represents a reserved field/access type.
- The reserved field values must not be modified.
- The registers are 8 bits wide.
- All visible fields are read/write except where indicated with the following shading:

Read/write access
 Read-only access
 Write-only access

Table 7-1. Block Base Addresses

Base Address	Block Name	Register Quick Reference	Register Description Reference
0x000 0000	SW_RESET —Software Reset and Hardware ID	Section 7.1	Section 8.1
0x000 0100	CTRL_ASYNC —Async control	Section 7.2	Section 8.2
0x000 0200	CCM —Device Clocking and Sample Rate Control	Section 7.3	Section 8.3
0x000 0300	MSM —Power, Global, and Error Control	Section 7.4	Section 8.4
0x000 0400	TIM_GEN —Sensor Timing Generator	Section 7.5	Section 8.5
0x000 0500	OP_FORMAT —Output Formatter	Section 7.6	Section 8.6
0x000 0600	PAD_INTF —Pad Interface I/O Control	Section 7.7	Section 8.7
0x000 0700	DAC_CTRL —DAC_CTRL	Section 7.8	Section 8.8
0x000 0800	PGA_CTRL —PGA_CTRL	Section 7.9	Section 8.9
0x000 0900	BLC_CTRL —BLC_CTRL	Section 7.10	Section 8.10
0x000 0A00	SARADC_1 —SARADC_1	Section 7.11	Section 8.11
0x000 0B00	SARADC_2 —SARADC_2	Section 7.12	Section 8.12
0x000 0C00	SARADC_3 —SARADC_3	Section 7.13	Section 8.13
0x000 0D00	SARADC_4 —SARADC_4	Section 7.14	Section 8.14
0x000 1000	AGC_TOP —Digital Gain Control	Section 7.15	Section 8.15
0x000 1100	PAT_GEN —Test pattern generator	Section 7.16	Section 8.16
0x000 1500	LED_CTRL —LED Control	Section 7.17	Section 8.17
0x000 1700	DPPLL1 —DPPLL1	Section 7.18	Section 8.18

7.1 SW_RESET—Software Reset and Hardware ID

Address	Register	7	6	5	4	3	2	1	0
0x000 0000 p. 131	BANK	DESCRIM				—	BANK		
		1	1	0	0	0	0	0	0
0x000 0008 p. 131	SFT_RESET	SFT_RESET							
		0	0	0	0	0	0	0	0
0x000 000C p. 131	DEVID_0	DEVID_0							
		0	1	0	0	0	1	0	0
0x000 000D p. 132	DEVID_1	DEVID_1							
		0	0	1	0	1	0	1	0
0x000 000E p. 132	DEVID_2	DEVID_2							
		0	0	0	0	1	0	0	0
0x000 0010 p. 132	REVID	AREVID				MTLREVID			
		1	0	1	1	0	0	0	0
0x000 0014 p. 132	RELID	RELID							
		0	0	0	0	0	0	0	0

7.2 CTRL_ASYNC—Async control

Address	Register	7	6	5	4	3	2	1	0
0x000 0100 p. 132	ASYNC0_0	—	—	ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
		0	0	0	0	0	0	0	0
0x000 0101 p. 133	ASYNC0_1	—	—	—	—	—	—	—	OSC_DISABLE
		0	0	0	0	0	0	0	0

7.3 CCM—Device Clocking and Sample Rate Control

Address	Register	7	6	5	4	3	2	1	0
0x000 0200 p. 133	DEVICE_CLK_CFG_0	PIXEL_SAMPLE_RATE							
		0	1	1	1	1	0	0	0
0x000 0201 p. 133	DEVICE_CLK_CFG_1	—			EXT_AFECK_DUR			CLOCK_CFG_MODE	
		0	0	0	0	0	0	0	1
0x000 0202 p. 134	DEVICE_CLK_CFG_2	—						PLL2_AUTO	PLL1_AUTO
		0	0	0	0	0	0	1	1
0x000 0203 p. 134	DEVICE_CLK_CFG_3	PLL2_SS_FREQ			PLL2_SS_MAG				PLL2_SS_EN
		0	0	0	0	0	0	0	0
0x000 0206 p. 134	DEVICE_CLK_CFG2_2	PLL2_SS_REF_FREQ_0							
		0	0	0	0	0	0	0	0
0x000 0207 p. 134	DEVICE_CLK_CFG2_3	DOUT_READY_EN	—		MCLK_EXT_SS	—		PLL2_SS_REF_FREQ_1	
		1	0	0	0	0	0	0	0
0x000 0208 p. 135	MCLK_FILT_CFG_0	MCLK_MASK_DLY_0							
		0	0	0	0	0	0	0	1
0x000 0209 p. 135	MCLK_FILT_CFG_1	MCLK_MASK_DLY_1							
		0	0	0	0	0	0	0	0
0x000 020A p. 135	MCLK_FILT_CFG_2	MCLK_MASK_POL	MCLK_MASK_EN	MCLK_MASK_DUR					
		0	0	0	0	0	0	0	1
0x000 020B p. 136	MCLK_FILT_CFG_3	MCLK_MASK_CLK_DIV			MCLK_MASK_OFF_RST	—		MCLK_MASK_SRC	
		0	0	0	0	0	0	0	0

7.4 MSM—Power, Global, and Error Control

Address	Register	7	6	5	4	3	2	1	0	
0x000 0300 p. 136	DEVICE_CTRL_0	LDO4_EN	SHARED_BUS_MODE	GPI12_DOUT_CTRL	—	COMPLETE_LINE	ACTIVE_EN	READY_EN	MSM_EN	
		0	0	0	0	0	0	0	1	
0x000 0301 p. 137	DEVICE_CTRL_1	TEMP_ERROR_RST_MASK	—	TEMP_ERROR_CLR	—					
		0	0	0	0	0	0	0	0	
0x000 0302 p. 137	DEVICE_CTRL_2	LDO4_HIZ	—	LDO_EN_MASK	LDO5_EN	LDO5_ILIMIT_VPC	LDO5_ILIMIT_CTRL			
		0	0	0	0	1	0	0	0	
0x000 0303 p. 138	DEVICE_CTRL_3	—			LDO5_VOUT					
		0	0	0	0	0	0	0	0	
0x000 0304 p. 138	RLCDAC_CTRL_0	—							VBIAS_EN	
		0	0	0	0	0	0	0	0	
0x000 0305 p. 138	RLCDAC_CTRL_1	—			VBIAS_LVL					
		0	0	0	0	0	0	0	0	
0x000 0306 p. 138	RLCDAC_CTRL_2	—				VBIAS_ISEL_BOOST	VBIAS_ISEL		VBIAS_REF	
		0	0	0	0	0	0	0	1	

Address	Register	7	6	5	4	3	2	1	0
0x000 0310 p. 139	DEVICE_STATUS_0	ERROR_STS 0	— 0	ACTIVE_STS 0	READY_STS 0	— 0		IDLE_STS 0	STARTUP_STS 0
0x000 0312 p. 139	DEVICE_STATUS_2	VDDA_STS 0	0	0	0	0	1	0	0

7.5 TIM_GEN—Sensor Timing Generator

Address	Register	7	6	5	4	3	2	1	0
0x000 0400 p. 139	TG_CONFIG1_0	VSMP_EXT_POL 0	EXTERNAL_MODE_TG_EN 0	CDS_EN 0	CLAMP_EN 0	CLAMP_MODE 0		TGSYNC_MODE 0	EXTERNAL_MODE_EN 1
0x000 0401 p. 140	TG_CONFIG1_1	INIT_SEQ_STATE 0		VSMP_EXT_DLY 0		0		0	EXTERNAL_MODE_SEL 0
0x000 0402 p. 140	TG_CONFIG1_2	— 0	TGSYNC_SINGLE_SEQ 0	NUM_SEQ_STATES 0		RSMP_EXT_DLY 0		0	1
0x000 0403 p. 141	TG_CONFIG1_3	— 0		0	0	CH4_CLAMP_OVRD_ 0	CH3_CLAMP_OVRD_ 0	CH2_CLAMP_OVRD_ 0	CH1_CLAMP_OVRD_ 0
0x000 040C p. 141	TG_STATUS	0	0	0	0	0	0	SEQ_STATE_STS 0	
0x000 0410 p. 141	TG_CONFIG2_0	— 0		LEDSTART_POL 0	LEDSTART_SEQ_INIT 0	TGSYNC_ASYNC 0	TGSYNC_IN_POL 1	TGSYNC_IN_SRC 0	
0x000 0411 p. 142	TG_CONFIG2_1	— 0	TGSYNC_OUT_DUR 0		1	0	TGSYNC_IN_OFFSET 0		0
0x000 0412 p. 142	TG_CONFIG2_2	— 0	TGSYNC_FILT_STAGE 1		0	0	TGSYNC_FILT_DECM 0		TGSYNC_FILT_EN 0
0x000 0413 p. 142	TG_CONFIG2_3	— 0		TP_SEC_OFFSET 0		0	0	0	0
0x000 0414 p. 143	TG_CONFIG3_0	LEDG_PO_SEL 0			0	1	LEDR_PO_SEL 0		
0x000 0415 p. 143	TG_CONFIG3_1	DC_PO_2ND_PULSE 0	NUM_DC_PO 0		0	LEDB_PO_SEL 0			1
0x000 0416 p. 144	TG_CONFIG3_2	FLAG_DEN2_PO_SEL 1			0	0	FLAG_DEN1_PO_SEL 1		0
0x000 0417 p. 144	TG_CONFIG3_3	— 0		FLAG_PIX2_PO_EDGE 0		0	FLAG_PIX2_PO_SEL 1		0
0x000 0418 p. 144	SEQ_DURATION0_0	0		0		SEQ_STATE0_LEN_0 0		0	0
0x000 0419 p. 144	SEQ_DURATION0_1	0		0		SEQ_STATE0_LEN_1 0		1	0
0x000 041A p. 145	SEQ_DURATION0_2	0		0		SEQ_STATE1_LEN_0 0		0	0
0x000 041B p. 145	SEQ_DURATION0_3	0		0		SEQ_STATE1_LEN_1 0		1	0
0x000 041C p. 145	SEQ_DURATION1_0	0		0		SEQ_STATE2_LEN_0 0		0	0
0x000 041D p. 145	SEQ_DURATION1_1	0		0		SEQ_STATE2_LEN_1 0		1	0
0x000 041E p. 145	SEQ_DURATION1_2	0		0		SEQ_STATE3_LEN_0 0		0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 041F p. 145	SEQ_DURATION1_3	0	0	0	0	1	0	0	0
0x000 0420 p. 146	TG_TIMING_CFG0_0	0	0	0	0	0	0	0	0
0x000 0421 p. 146	TG_TIMING_CFG0_1	0	0	0	0	0	0	0	0
0x000 0422 p. 146	TG_TIMING_CFG0_2	0	0	0	0	0	0	0	0
0x000 0423 p. 146	TG_TIMING_CFG0_3	0	0	0	0	0	0	0	0
0x000 0424 p. 146	TG_TIMING_CFG1_0	0	0	0	0	0	0	0	0
0x000 0425 p. 147	TG_TIMING_CFG1_1	0	0	0	0	0	0	0	0
0x000 0426 p. 147	TG_TIMING_CFG1_2	0	0	0	0	0	0	0	0
0x000 0427 p. 147	TG_TIMING_CFG1_3	0	0	0	0	0	0	0	0
0x000 042C p. 147	TG_TIMING_CFG3_0	0	0	0	0	0	0	0	0
0x000 042D p. 147	TG_TIMING_CFG3_1	0	0	0	0	0	0	0	0
0x000 042E p. 148	TG_TIMING_CFG3_2	0	0	0	0	0	0	0	0
0x000 042F p. 148	TG_TIMING_CFG3_3	0	0	0	0	0	0	0	0
0x000 0434 p. 148	TG_TIMING_CFG5_0	1	1	1	1	1	1	1	1
0x000 0435 p. 148	TG_TIMING_CFG5_1	1	1	1	1	1	1	1	1
0x000 0436 p. 148	TG_TIMING_CFG5_2	1	1	1	1	1	1	1	1
0x000 0437 p. 149	TG_TIMING_CFG5_3	1	1	1	1	1	1	1	1
0x000 0438 p. 149	TG_TIMING_CFG6_0	1	1	1	1	1	1	1	1
0x000 0439 p. 149	TG_TIMING_CFG6_1	1	1	1	1	1	1	1	1
0x000 043A p. 149	TG_TIMING_CFG6_2	1	1	1	1	1	1	1	1
0x000 043B p. 149	TG_TIMING_CFG6_3	1	1	1	1	1	1	1	1
0x000 043C p. 150	TG_TIMING_CFG7_0	—	ACYC_PO_POL		ACYC_PO_SEL		ACYC_MODE	ACYC_EN	
		0	0	0	0	0	0	0	0
0x000 043D p. 150	TG_TIMING_CFG7_1	0	0	0	0	0	0	0	0
0x000 043E p. 150	TG_TIMING_CFG7_2	0	0	0	0	0	0	0	0
0x000 043F p. 150	TG_TIMING_CFG7_3	0	0	0	0	0	0	0	0
0x000 0440 p. 151	TG_TIMING_CFG8_0	PO7_INIT_LVL	PO6_INIT_LVL	PO5_INIT_LVL	PO4_INIT_LVL	PO3_INIT_LVL	PO2_INIT_LVL	PO1_INIT_LVL	PO0_INIT_LVL
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 0441 p. 151	TG_TIMING_CFG8_1	—			CK_TOG2_INIT_LVL	CK_TOG1_INIT_LVL	PO10_INIT_LVL	PO9_INIT_LVL	PO8_INIT_LVL
		0	0	0	0	0	0	0	0
0x000 0442 p. 152	TG_TIMING_CFG8_2	FIFO_RESET_DLY	PO10_DC_INIT_LVL	PO9_DC_INIT_LVL	PO8_DC_INIT_LVL	PO7_DC_INIT_LVL	PO6_DC_INIT_LVL	PO5_DC_INIT_LVL	PGEN_CNT_SEL
		1	0	0	0	0	0	0	1
0x000 0443 p. 152	TG_TIMING_CFG8_3	FIFO_BLANK_DUR					—		FIFO_RESET_CTRL
		1	1	0	0	1	0	0	0
0x000 0444 p. 152	TG_POLARITY_T1_0				CK_TOG1_TP_POL_0				
		0	0	0	0	0	0	0	0
0x000 0445 p. 153	TG_POLARITY_T1_1				CK_TOG1_TP_POL_1				
		0	0	0	0	0	0	0	0
0x000 0446 p. 153	TG_POLARITY_T1_2				CK_TOG1_TP_POL_2				
		0	0	0	0	0	0	0	0
0x000 0447 p. 153	TG_POLARITY_T1_3				CK_TOG1_TP_POL_3				
		0	0	0	0	0	0	0	0
0x000 0448 p. 153	TG_POLARITY_T2_0				CK_TOG2_TP_POL_0				
		0	0	0	0	0	0	0	0
0x000 0449 p. 153	TG_POLARITY_T2_1				CK_TOG2_TP_POL_1				
		0	0	0	0	0	0	0	0
0x000 044A p. 153	TG_POLARITY_T2_2				CK_TOG2_TP_POL_2				
		0	0	0	0	0	0	0	0
0x000 044B p. 154	TG_POLARITY_T2_3				CK_TOG2_TP_POL_3				
		0	0	0	0	0	0	0	0
0x000 0450 p. 154	TG_POLARITY_PO0_0				PO0_TP_POL_0				
		0	0	0	0	0	0	0	0
0x000 0451 p. 154	TG_POLARITY_PO0_1				PO0_TP_POL_1				
		0	0	0	0	0	0	0	0
0x000 0452 p. 154	TG_POLARITY_PO0_2				PO0_TP_POL_2				
		0	0	0	0	0	0	0	0
0x000 0453 p. 154	TG_POLARITY_PO0_3				PO0_TP_POL_3				
		0	0	0	0	0	0	0	0
0x000 0454 p. 154	TG_POLARITY_PO1_0				PO1_TP_POL_0				
		0	0	0	0	0	0	0	0
0x000 0455 p. 155	TG_POLARITY_PO1_1				PO1_TP_POL_1				
		0	0	0	0	0	0	0	0
0x000 0456 p. 155	TG_POLARITY_PO1_2				PO1_TP_POL_2				
		0	0	0	0	0	0	0	0
0x000 0457 p. 155	TG_POLARITY_PO1_3				PO1_TP_POL_3				
		0	0	0	0	0	0	0	0
0x000 0458 p. 155	TG_POLARITY_PO2_0				PO2_TP_POL_0				
		0	0	0	0	0	0	0	0
0x000 0459 p. 155	TG_POLARITY_PO2_1				PO2_TP_POL_1				
		0	0	0	0	0	0	0	0
0x000 045A p. 155	TG_POLARITY_PO2_2				PO2_TP_POL_2				
		0	0	0	0	0	0	0	0
0x000 045B p. 156	TG_POLARITY_PO2_3				PO2_TP_POL_3				
		0	0	0	0	0	0	0	0
0x000 045C p. 156	TG_POLARITY_PO3_0				PO3_TP_POL_0				
		0	0	0	0	0	0	0	0
0x000 045D p. 156	TG_POLARITY_PO3_1				PO3_TP_POL_1				
		0	0	0	0	0	0	0	0
0x000 045E p. 156	TG_POLARITY_PO3_2				PO3_TP_POL_2				
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 045F p. 156	TG_POLARITY_PO3_3	0	0	0	0	0	0	0	0
0x000 0460 p. 156	TG_POLARITY_PO4_0	0	0	0	0	0	0	0	0
0x000 0461 p. 157	TG_POLARITY_PO4_1	0	0	0	0	0	0	0	0
0x000 0462 p. 157	TG_POLARITY_PO4_2	0	0	0	0	0	0	0	0
0x000 0463 p. 157	TG_POLARITY_PO4_3	0	0	0	0	0	0	0	0
0x000 0464 p. 157	TG_POLARITY_PO5_0	0	0	0	0	0	0	0	0
0x000 0465 p. 157	TG_POLARITY_PO5_1	0	0	0	0	0	0	0	0
0x000 0466 p. 158	TG_POLARITY_PO5_2	0	0	0	0	0	0	0	0
0x000 0467 p. 158	TG_POLARITY_PO5_3	0	0	0	0	0	0	0	0
0x000 0468 p. 158	TG_POLARITY_PO6_0	0	0	0	0	0	0	0	0
0x000 0469 p. 158	TG_POLARITY_PO6_1	0	0	0	0	0	0	0	0
0x000 046A p. 158	TG_POLARITY_PO6_2	0	0	0	0	0	0	0	0
0x000 046B p. 159	TG_POLARITY_PO6_3	0	0	0	0	0	0	0	0
0x000 046C p. 159	TG_POLARITY_PO7_0	0	0	0	0	0	0	0	0
0x000 046D p. 159	TG_POLARITY_PO7_1	0	0	0	0	0	0	0	0
0x000 046E p. 159	TG_POLARITY_PO7_2	0	0	0	0	0	0	0	0
0x000 046F p. 159	TG_POLARITY_PO7_3	0	0	0	0	0	0	0	0
0x000 0470 p. 160	TG_POLARITY_PO8_0	0	0	0	0	0	0	0	0
0x000 0471 p. 160	TG_POLARITY_PO8_1	0	0	0	0	0	0	0	0
0x000 0472 p. 160	TG_POLARITY_PO8_2	0	0	0	0	0	0	0	0
0x000 0473 p. 160	TG_POLARITY_PO8_3	0	0	0	0	0	0	0	0
0x000 0474 p. 160	TG_POLARITY_PO9_0	0	0	0	0	0	0	0	0
0x000 0475 p. 161	TG_POLARITY_PO9_1	0	0	0	0	0	0	0	0
0x000 0476 p. 161	TG_POLARITY_PO9_2	0	0	0	0	0	0	0	0
0x000 0477 p. 161	TG_POLARITY_PO9_3	0	0	0	0	0	0	0	0
0x000 0478 p. 161	TG_POLARITY_PO10_0	0	0	0	0	0	0	0	0
0x000 0479 p. 161	TG_POLARITY_PO10_1	0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0	
0x000 047A p. 162	TG_POLARITY_PO10_2	PO10_TP_POL_2								
0x000 047B p. 162	TG_POLARITY_PO10_3	PO10_TP_POL_3								
0x000 047C p. 162	TG_REFCNT_SEL_0	—				CLAMP_CNT_SEL		BLC_CNT_SEL	FLAG_PIX1_CNT_SEL	
0x000 047D p. 162	TG_REFCNT_SEL_1	—			CK_TOG2_CNT_SEL	CK_TOG1_CNT_SEL	—		CK_MASK2_CNT_SEL	CK_MASK1_CNT_SEL
0x000 047E p. 163	TG_REFCNT_SEL_2	PO7_CNT_SEL	PO6_CNT_SEL	PO5_CNT_SEL	PO4_CNT_SEL	PO3_CNT_SEL	PO2_CNT_SEL	PO1_CNT_SEL	PO0_CNT_SEL	
0x000 047F p. 163	TG_REFCNT_SEL_3	—				PO10_CNT_SEL		PO9_CNT_SEL	PO8_CNT_SEL	
0x000 048C p. 164	TG_CYCPAT_CFG0_0	BLC_SEQ_SEL				FLAG_PIX1_SEQ_SEL				
0x000 048D p. 164	TG_CYCPAT_CFG0_1	—				CLAMP_SEQ_SEL				
0x000 048E p. 164	TG_CYCPAT_CFG0_2	CK_MASK2_SEQ_SEL				CK_MASK1_SEQ_SEL				
0x000 0490 p. 165	TG_CYCPAT_CFG1_0	CK_TOG2_SEQ_SEL				CK_TOG1_SEQ_SEL				
0x000 0491 p. 165	TG_CYCPAT_CFG1_1	PO0_SEQ_SEL				—				
0x000 0492 p. 165	TG_CYCPAT_CFG1_2	PO2_SEQ_SEL				PO1_SEQ_SEL				
0x000 0493 p. 166	TG_CYCPAT_CFG1_3	—				PO3_SEQ_SEL				
0x000 0494 p. 166	TG_CYCPAT_CFG2_0	PO5_SEQ_SEL				PO4_SEQ_SEL				
0x000 0495 p. 166	TG_CYCPAT_CFG2_1	PO7_SEQ_SEL				PO6_SEQ_SEL				
0x000 0496 p. 167	TG_CYCPAT_CFG2_2	PO9_SEQ_SEL				PO8_SEQ_SEL				
0x000 0497 p. 167	TG_CYCPAT_CFG2_3	—				PO10_SEQ_SEL				
0x000 0498 p. 167	TG_TOGGLE_POINT0_0	TP0_PIXEL_0								
0x000 0499 p. 167	TG_TOGGLE_POINT0_1	TP0_PIXEL_1								
0x000 049A p. 168	TG_TOGGLE_POINT0_2	TP1_PIXEL_0								
0x000 049B p. 168	TG_TOGGLE_POINT0_3	TP1_PIXEL_1								
0x000 049C p. 168	TG_TOGGLE_POINT1_0	TP2_PIXEL_0								
0x000 049D p. 168	TG_TOGGLE_POINT1_1	TP2_PIXEL_1								
0x000 049E p. 168	TG_TOGGLE_POINT1_2	TP3_PIXEL_0								
0x000 049F p. 168	TG_TOGGLE_POINT1_3	TP3_PIXEL_1								
0x000 04A0 p. 169	TG_TOGGLE_POINT2_0	TP4_PIXEL_0								

Address	Register	7	6	5	4	3	2	1	0
0x000 04A1 p. 169	TG_TOGGLE_POINT2_1	0	0	0	0	0	0	0	0
0x000 04A2 p. 169	TG_TOGGLE_POINT2_2	0	0	0	0	0	0	0	0
0x000 04A3 p. 169	TG_TOGGLE_POINT2_3	0	0	0	0	0	0	0	0
0x000 04A4 p. 169	TG_TOGGLE_POINT3_0	0	0	0	0	0	0	0	0
0x000 04A5 p. 169	TG_TOGGLE_POINT3_1	0	0	0	0	0	0	0	0
0x000 04A6 p. 170	TG_TOGGLE_POINT3_2	0	0	0	0	0	0	0	0
0x000 04A7 p. 170	TG_TOGGLE_POINT3_3	0	0	0	0	0	0	0	0
0x000 04A8 p. 170	TG_TOGGLE_POINT4_0	0	0	0	0	0	0	0	0
0x000 04A9 p. 170	TG_TOGGLE_POINT4_1	0	0	0	0	0	0	0	0
0x000 04AA p. 170	TG_TOGGLE_POINT4_2	0	0	0	0	0	0	0	0
0x000 04AB p. 170	TG_TOGGLE_POINT4_3	0	0	0	0	0	0	0	0
0x000 04AC p. 171	TG_TOGGLE_POINT5_0	0	0	0	0	0	0	0	0
0x000 04AD p. 171	TG_TOGGLE_POINT5_1	0	0	0	0	0	0	0	0
0x000 04AE p. 171	TG_TOGGLE_POINT5_2	0	0	0	0	0	0	0	0
0x000 04AF p. 171	TG_TOGGLE_POINT5_3	0	0	0	0	0	0	0	0
0x000 04B0 p. 171	TG_TOGGLE_POINT6_0	0	0	0	0	0	0	0	0
0x000 04B1 p. 171	TG_TOGGLE_POINT6_1	0	0	0	0	0	0	0	0
0x000 04B2 p. 172	TG_TOGGLE_POINT6_2	0	0	0	0	0	0	0	0
0x000 04B3 p. 172	TG_TOGGLE_POINT6_3	0	0	0	0	0	0	0	0
0x000 04B4 p. 172	TG_TOGGLE_POINT7_0	0	0	0	0	0	0	0	0
0x000 04B5 p. 172	TG_TOGGLE_POINT7_1	0	0	0	0	0	0	0	0
0x000 04B6 p. 172	TG_TOGGLE_POINT7_2	0	0	0	0	0	0	0	0
0x000 04B7 p. 172	TG_TOGGLE_POINT7_3	0	0	0	0	0	0	0	0
0x000 04B8 p. 173	TG_TOGGLE_POINT8_0	0	0	0	0	0	0	0	0
0x000 04B9 p. 173	TG_TOGGLE_POINT8_1	0	0	0	0	0	0	0	0
0x000 04BA p. 173	TG_TOGGLE_POINT8_2	0	0	0	0	0	0	0	0
0x000 04BB p. 173	TG_TOGGLE_POINT8_3	0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 04BC p. 173	TG_TOGGLE_POINT9_0	0	0	0	0	0	0	0	0
0x000 04BD p. 173	TG_TOGGLE_POINT9_1	0	0	0	0	0	0	0	0
0x000 04BE p. 174	TG_TOGGLE_POINT9_2	0	0	0	0	0	0	0	0
0x000 04BF p. 174	TG_TOGGLE_POINT9_3	0	0	0	0	0	0	0	0
0x000 04C0 p. 174	TG_TOGGLE_POINT10_0	0	0	0	0	0	0	0	0
0x000 04C1 p. 174	TG_TOGGLE_POINT10_1	0	0	0	0	0	0	0	0
0x000 04C2 p. 174	TG_TOGGLE_POINT10_2	0	0	0	0	0	0	0	0
0x000 04C3 p. 175	TG_TOGGLE_POINT10_3	0	0	0	0	0	0	0	0
0x000 04C4 p. 175	TG_TOGGLE_POINT11_0	0	0	0	0	0	0	0	0
0x000 04C5 p. 175	TG_TOGGLE_POINT11_1	0	0	0	0	0	0	0	0
0x000 04C6 p. 175	TG_TOGGLE_POINT11_2	0	0	0	0	0	0	0	0
0x000 04C7 p. 175	TG_TOGGLE_POINT11_3	0	0	0	0	0	0	0	0
0x000 04C8 p. 176	TG_TOGGLE_POINT12_0	0	0	0	0	0	0	0	0
0x000 04C9 p. 176	TG_TOGGLE_POINT12_1	0	0	0	0	0	0	0	0
0x000 04CA p. 176	TG_TOGGLE_POINT12_2	0	0	0	0	0	0	0	0
0x000 04CB p. 176	TG_TOGGLE_POINT12_3	0	0	0	0	0	0	0	0
0x000 04CC p. 176	TG_TOGGLE_POINT13_0	0	0	0	0	0	0	0	0
0x000 04CD p. 177	TG_TOGGLE_POINT13_1	0	0	0	0	0	0	0	0
0x000 04CE p. 177	TG_TOGGLE_POINT13_2	0	0	0	0	0	0	0	0
0x000 04CF p. 177	TG_TOGGLE_POINT13_3	0	0	0	0	0	0	0	0
0x000 04D0 p. 177	TG_TOGGLE_POINT14_0	0	0	0	0	0	0	0	0
0x000 04D1 p. 177	TG_TOGGLE_POINT14_1	0	0	0	0	0	0	0	0
0x000 04D2 p. 178	TG_TOGGLE_POINT14_2	0	0	0	0	0	0	0	0
0x000 04D3 p. 178	TG_TOGGLE_POINT14_3	0	0	0	0	0	0	0	0
0x000 04D4 p. 178	TG_TOGGLE_POINT15_0	0	0	0	0	0	0	0	0
0x000 04D5 p. 178	TG_TOGGLE_POINT15_1	0	0	0	0	0	0	0	0
0x000 04D6 p. 178	TG_TOGGLE_POINT15_2	0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 04D7 p. 179	TG_TOGGLE_POINT15_3	TP31_PIXEL_1							
		0	0	0	0	0	0	0	0
0x000 04D8 p. 179	TG_OUTMUX_CFG0_0	PCK1_PO_SEL			PCK1_DLY		CLKOUT1_POL	CLKOUT1_EN	
		0	0	0	0	0	0	0	0
0x000 04D9 p. 179	TG_OUTMUX_CFG0_1	PCK2_PO_SEL			PCK2_DLY		CLKOUT2_POL	CLKOUT2_EN	
		0	0	0	0	0	0	0	0
0x000 04DA p. 180	TG_OUTMUX_CFG0_2	PCK3_PO_SEL			PCK3_DLY		CLKOUT3_POL	CLKOUT3_EN	
		0	0	0	0	0	0	0	0
0x000 04DB p. 180	TG_OUTMUX_CFG0_3	PCK4_PO_SEL			PCK4_DLY		CLKOUT4_POL	CLKOUT4_EN	
		0	0	0	0	0	0	0	0
0x000 04E3 p. 180	TG_OUTMUX_CFG2_3	—				CLKOUT4_SRC	CLKOUT3_SRC	CLKOUT2_SRC	CLKOUT1_SRC
		0	0	0	0	0	0	0	0
0x000 04E4 p. 181	DLL_CFG1_0	—		DLL_RSMP_RISE					
		0	0	1	0	0	0	0	0
0x000 04E5 p. 181	DLL_CFG1_1	—		DLL_RSMP_FALL					
		0	0	1	0	0	1	1	0
0x000 04E6 p. 181	DLL_CFG1_2	—		DLL_VSMP_RISE					
		0	0	1	0	1	0	0	0
0x000 04E7 p. 182	DLL_CFG1_3	—		DLL_VSMP_FALL					
		0	0	0	0	1	0	0	0
0x000 04E8 p. 182	DLL_CFG2_0	—		DLL_CK1_RISE					
		0	0	0	0	1	0	1	0
0x000 04E9 p. 182	DLL_CFG2_1	DLL_CK1_DIV	—	DLL_CK1_FALL					
		0	0	0	1	1	0	0	1
0x000 04EA p. 182	DLL_CFG2_2	—		DLL_CK2_RISE					
		0	0	0	1	1	0	0	1
0x000 04EB p. 183	DLL_CFG2_3	DLL_CK2_DIV	—	DLL_CK2_FALL					
		0	0	1	0	1	0	0	0
0x000 04EC p. 183	DLL_CFG3_0	—		DLL_CK3_RISE					
		0	0	1	0	1	0	0	0
0x000 04ED p. 183	DLL_CFG3_1	DLL_CK3_DIV	—	DLL_CK3_FALL					
		0	0	0	0	1	0	1	0
0x000 04EE p. 183	DLL_CFG3_2	—		DLL_CK4_RISE					
		0	0	0	0	0	0	0	0
0x000 04EF p. 184	DLL_CFG3_3	DLL_CK4_DIV	—	DLL_CK4_FALL					
		0	0	0	0	0	0	0	0
0x000 04F4 p. 184	DLL_CFG5_0	—		DLL_TGCKO_RISE					
		0	0	1	1	0	1	1	1
0x000 04F5 p. 184	DLL_CFG5_1	—		DLL_AFECK_DUR					
		0	0	0	1	0	1	1	0

7.6 OP_FORMAT—Output Formatter

Address	Register	7	6	5	4	3	2	1	0
0x000 0500 p. 184	OP_FORMAT_CFG0_0	FORMAT_LOAD	FORMAT_SEL						
		0	0	0	0	0	0	0	1
0x000 0501 p. 185	OP_FORMAT_CFG0_1	—				LVDS_POL	LVDS_REVERSE	CMOS_EXT_POL	LVDS_BIT_ORDER
		0	0	0	0	0	0	0	1
0x000 0502 p. 185	OP_FORMAT_CFG0_2	—						TDM_GAP	TDM_EN
		0	0	0	0	0	0	0	0
0x000 0503 p. 185	OP_FORMAT_CFG0_3	—			TDM_OFFSET				
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 0504 p. 186	OP_FORMAT_CFG1_0	FLAG_S1_FN				FLAG_S0_FN			
		0	0	0	0	0	0	0	0
0x000 0505 p. 186	OP_FORMAT_CFG1_1	FLAG_S3_FN				FLAG_S2_FN			
		0	0	0	0	0	0	0	0
0x000 0506 p. 186	OP_FORMAT_CFG1_2	—				FLAG_S4_FN			
		0	0	0	0	0	0	0	0

7.7 PAD_INTF—Pad Interface I/O Control

Address	Register	7	6	5	4	3	2	1	0
0x000 0600 p. 187	CLKOUT_SEL_1_0	CLKOUT4_FN	CLKOUT3_FN			CLKOUT2_FN		CLKOUT1_FN	
		0	0	0	1	0	1	0	1
0x000 0602 p. 187	CLKOUT_SEL_1_2	—			MON_SEL		TGSYNC1_VSMP_FN		
		0	0	0	0	0	0	0	0
0x000 0603 p. 187	CLKOUT_SEL_1_3	—				TDM_DOUT_DLY_SEL		TDM_DOUT_DLY_EN	MCLK_EXT_LVDS
		0	0	0	0	0	1	0	0
0x000 060C p. 188	GPI_VAL_0	X	X	X	GP4_IN_STS	GP3_IN_STS	GP2_IN_STS	GP1_IN_STS	GP12_IN_STS
					X	X	X	X	X
0x000 060E p. 188	GPI_VAL_2	—			GP4_DIR		GP3_DIR	GP2_DIR	GP1_DIR
		0	0	0	0	0	0	0	0
0x000 060F p. 189	GPI_VAL_3	—			GP4_OUT_LVL		GP3_OUT_LVL	GP2_OUT_LVL	GP1_OUT_LVL
		0	0	0	0	0	0	0	0
0x000 0610 p. 189	LVDS_CFG	—				LVDS_VREF_SEL			
		0	0	0	0	0	0	0	1
0x000 0618 p. 189	CMOS_CFG_0	—	SPI_SDO_I2C_SCL_DRV_STR			SPI_SDO_I2C_SCL_PULL		SPI_MISO_I2C_SCL_HIZ_EN	SPI_MISO_I2C_SCL_IE
		0	0	0	1	1	0	0	1
0x000 0619 p. 190	CMOS_CFG_1	—	SPI_MOSI_I2C_SDA_DRV_STR			SPI_MOSI_I2C_SDA_PULL		SPI_MOSI_I2C_SDA_HIZ_EN	SPI_MOSI_I2C_SDA_IE
		0	0	0	1	1	0	0	1
0x000 061A p. 190	CMOS_CFG_2	—			SPI_SCK_PULL		—		SPI_SCK_IE
		0	0	0	1	1	0	0	1
0x000 061B p. 190	CMOS_CFG_3	—			SPI_CS_PULL		—		SPI_CS_IE
		0	0	0	1	1	0	0	1
0x000 061C p. 191	MCLK_CFG_0	—	MCLK_LVDS_RT_EN	—					
		0	0	1	0	0	0	0	0
0x000 061D p. 191	MCLK_CFG_1	—				MCLK_EXT_MCLK_EXT_P_PULL		MCLK_EXT_MCLK_EXT_P_HIZ_EN	MCLK_EXT_MCLK_EXT_P_IE
		0	0	0	1	1	0	0	1
0x000 061E p. 191	MCLK_CFG_2	—			MCLK_EXT_N_GPI12_PULL		MCLK_EXT_N_GPI12_HIZ_EN	MCLK_EXT_N_GPI12_IE	
		0	0	0	1	1	0	0	1
0x000 0620 p. 192	CLKOUT1_4_CFG_0	—	CLKOUT1_LEDEN_TGSYNC2_GPIO1_DRV_STR			CLKOUT1_LEDEN_TGSYNC2_GPIO1_PULL		CLKOUT1_LEDEN_TGSYNC2_GPIO1_HIZ_EN	CLKOUT1_LEDEN_TGSYNC2_GPIO1_IE
		0	0	0	1	1	0	0	1
0x000 0621 p. 192	CLKOUT1_4_CFG_1	—	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_DRV_STR			CLKOUT2_LEDG_EN_LEDSTART_GPIO2_PULL		CLKOUT2_LEDG_EN_LEDSTART_GPIO2_HIZ_EN	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_IE
		0	0	0	1	1	0	0	1

Address	Register	7	6	5	4	3	2	1	0
0x000 0622 p. 192	CLKOUT1_4_CFG_2	—	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_DRV_STR			CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_PULL		CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_HIZ_EN	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_IE
		0	0	0	1	1	0	0	1
0x000 0623 p. 193	CLKOUT1_4_CFG_3	—	CLKOUT4_GPIO4_DRV_STR			CLKOUT4_GPIO4_PULL		CLKOUT4_GPIO4_HIZ_EN	CLKOUT4_GPIO4_IE
		0	0	0	1	1	0	0	1
0x000 062C p. 193	TGSYNC1_VSMP_EXT_CFG	—	TGSYNC1_VSMP_EXT_DRV_STR			TGSYNC1_VSMP_EXT_PULL		TGSYNC1_VSMP_EXT_HIZ_EN	TGSYNC1_VSMP_EXT_IE
		0	0	0	1	1	0	0	1
0x000 0630 p. 194	DOUT_CH1_CFG_0	—	DOUT1_P_DOUT1_DRV_STR			DOUT1_P_DOUT1_PULL		DOUT1_P_DOUT1_HIZ_EN	DOUT1_P_DOUT1_IE
		0	0	0	1	1	0	0	0
0x000 0631 p. 194	DOUT_CH1_CFG_1	—	DOUT1_N_DOUT2_DRV_STR			DOUT1_N_DOUT2_PULL		DOUT1_N_DOUT2_HIZ_EN	DOUT1_N_DOUT2_IE
		0	0	0	1	1	0	0	0
0x000 0632 p. 194	DCLKOUT_CFG_2	—	—			DCLKOUT_LVDS_TXDRV		DCLKOUT_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x000 0634 p. 195	DOUT_CH2_CFG_0	—	DOUT2_P_DOUT3_DRV_STR			DOUT2_P_DOUT3_PULL		DOUT2_P_DOUT3_HIZ_EN	DOUT2_P_DOUT3_IE
		0	0	0	1	1	0	0	0
0x000 0635 p. 195	DOUT_CH2_CFG_1	—	DOUT2_N_DOUT4_DRV_STR			DOUT2_N_DOUT4_PULL		DOUT2_N_DOUT4_HIZ_EN	DOUT2_N_DOUT4_IE
		0	0	0	1	1	0	0	0
0x000 0636 p. 196	DOUT_CH1_CFG_2	—	—			DOUT1_LVDS_TXDRV		DOUT1_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x000 0638 p. 196	DOUT_CH3_CFG_0	—	DOUT3_P_DOUT5_DRV_STR			DOUT3_P_DOUT5_PULL		DOUT3_P_DOUT5_HIZ_EN	DOUT3_P_DOUT5_IE
		0	0	0	1	1	0	0	0
0x000 0639 p. 196	DOUT_CH3_CFG_1	—	DOUT3_N_DOUT6_DRV_STR			DOUT3_N_DOUT6_PULL		DOUT3_N_DOUT6_HIZ_EN	DOUT3_N_DOUT6_IE
		0	0	0	1	1	0	0	0
0x000 063A p. 197	DOUT_CH2_CFG_2	—	—			DOUT2_LVDS_TXDRV		DOUT2_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x000 063E p. 197	DOUT_CH3_CFG_2	—	—			DOUT3_LVDS_TXDRV		DOUT3_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x000 0642 p. 197	DOUT_CH4_CFG_2	—	—			DOUT4_LVDS_TXDRV		DOUT4_LVDS_TRIM	
		0	0	0	0	1	0	1	0
0x000 0644 p. 198	DCLKOUT_CFG_0	—	DCLKOUT_P_DCLKOUT1_DOUT7_DRV_STR			DCLKOUT_P_DCLKOUT1_DOUT7_PULL		DCLKOUT_P_DCLKOUT1_DOUT7_HIZ_EN	DCLKOUT_P_DCLKOUT1_DOUT7_IE
		0	0	0	1	1	0	0	0
0x000 0645 p. 198	DCLKOUT_CFG_1	—	DCLKOUT_N_DCLKOUT2_DOUT8_DRV_STR			DCLKOUT_N_DCLKOUT2_DOUT8_PULL		DCLKOUT_N_DCLKOUT2_DOUT8_HIZ_EN	DCLKOUT_N_DCLKOUT2_DOUT8_IE
		0	0	0	1	1	0	0	0
0x000 0646 p. 198	DOUT_CH5_CFG_2	—	—			DOUT5_LVDS_TXDRV		DOUT5_LVDS_TRIM	
		0	0	0	0	1	0	1	0

7.8 DAC_CTRL—DAC_CTRL

Address	Register	7	6	5	4	3	2	1	0
0x000 0704 p. 199	DAC_CTRL_OFS01_CH1_0	CH1_SEQ0_OFFSET_0							
		0	0	0	0	0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 0705 p. 199	DAC_CTRL_OFS01_CH1_1	0	0	0	0	0	0	0	CH1_SEQ0_OFFSET_1 1
0x000 0706 p. 199	DAC_CTRL_OFS01_CH1_2	0	0	0	0	0	0	0	CH1_SEQ1_OFFSET_0 0
0x000 0707 p. 200	DAC_CTRL_OFS01_CH1_3	0	0	0	0	0	0	0	CH1_SEQ1_OFFSET_1 1
0x000 0708 p. 200	DAC_CTRL_OFS23_CH1_0	0	0	0	0	0	0	0	CH1_SEQ2_OFFSET_0 0
0x000 0709 p. 200	DAC_CTRL_OFS23_CH1_1	0	0	0	0	0	0	0	CH1_SEQ2_OFFSET_1 1
0x000 070A p. 200	DAC_CTRL_OFS23_CH1_2	0	0	0	0	0	0	0	CH1_SEQ3_OFFSET_0 0
0x000 070B p. 201	DAC_CTRL_OFS23_CH1_3	0	0	0	0	0	0	0	CH1_SEQ3_OFFSET_1 1
0x000 070C p. 201	DAC_CTRL_OFS0_CH2_3_0	0	0	0	0	0	0	0	CH2_SEQ0_OFFSET_0 0
0x000 070D p. 201	DAC_CTRL_OFS0_CH2_3_1	0	0	0	0	0	0	0	CH2_SEQ0_OFFSET_1 1
0x000 070E p. 201	DAC_CTRL_OFS0_CH2_3_2	0	0	0	0	0	0	0	CH3_SEQ0_OFFSET_0 0
0x000 070F p. 202	DAC_CTRL_OFS0_CH2_3_3	0	0	0	0	0	0	0	CH3_SEQ0_OFFSET_1 1
0x000 0710 p. 202	DAC_CTRL_OFS0_CH4_5_0	0	0	0	0	0	0	0	CH4_SEQ0_OFFSET_0 0
0x000 0711 p. 202	DAC_CTRL_OFS0_CH4_5_1	0	0	0	0	0	0	0	CH4_SEQ0_OFFSET_1 1
0x000 071A p. 202	DAC_CTRL_OFS1_CH2_2	0	0	0	0	0	0	0	CH2_SEQ1_OFFSET_0 0
0x000 071B p. 203	DAC_CTRL_OFS1_CH2_3	0	0	0	0	0	0	0	CH2_SEQ1_OFFSET_1 1
0x000 071E p. 203	DAC_CTRL_OFS1_CH3_2	0	0	0	0	0	0	0	CH3_SEQ1_OFFSET_0 0
0x000 071F p. 203	DAC_CTRL_OFS1_CH3_3	0	0	0	0	0	0	0	CH3_SEQ1_OFFSET_1 1
0x000 0722 p. 203	DAC_CTRL_OFS1_CH4_2	0	0	0	0	0	0	0	CH4_SEQ1_OFFSET_0 0
0x000 0723 p. 204	DAC_CTRL_OFS1_CH4_3	0	0	0	0	0	0	0	CH4_SEQ1_OFFSET_1 1
0x000 072C p. 204	DAC_CTRL_OFS23_CH2_0	0	0	0	0	0	0	0	CH2_SEQ2_OFFSET_0 0
0x000 072D p. 204	DAC_CTRL_OFS23_CH2_1	0	0	0	0	0	0	0	CH2_SEQ2_OFFSET_1 1
0x000 072E p. 204	DAC_CTRL_OFS23_CH2_2	0	0	0	0	0	0	0	CH2_SEQ3_OFFSET_0 0
0x000 072F p. 205	DAC_CTRL_OFS23_CH2_3	0	0	0	0	0	0	0	CH2_SEQ3_OFFSET_1 1

Address	Register	7	6	5	4	3	2	1	0	
0x000 0730 p. 205	DAC_CTRL_OFS23_CH3_0	CH3_SEQ2_OFFSET_0				0	0	0	0	0
0x000 0731 p. 205	DAC_CTRL_OFS23_CH3_1	—				0	0	0	0	CH3_SEQ2_OFFSET_1 1
0x000 0732 p. 205	DAC_CTRL_OFS23_CH3_2	CH3_SEQ3_OFFSET_0				0	0	0	0	0
0x000 0733 p. 206	DAC_CTRL_OFS23_CH3_3	—				0	0	0	0	CH3_SEQ3_OFFSET_1 1
0x000 0734 p. 206	DAC_CTRL_OFS23_CH4_0	CH4_SEQ2_OFFSET_0				0	0	0	0	0
0x000 0735 p. 206	DAC_CTRL_OFS23_CH4_1	—				0	0	0	0	CH4_SEQ2_OFFSET_1 1
0x000 0736 p. 206	DAC_CTRL_OFS23_CH4_2	CH4_SEQ3_OFFSET_0				0	0	0	0	0
0x000 0737 p. 207	DAC_CTRL_OFS23_CH4_3	—				0	0	0	0	CH4_SEQ3_OFFSET_1 1

7.9 PGA_CTRL—PGA_CTRL

Address	Register	7	6	5	4	3	2	1	0
0x000 0804 p. 207	PGA_CTRL_AGAIN_CH1_0	—		CH1_SEQ0_AGAIN		0	0	0	0
0x000 0805 p. 207	PGA_CTRL_AGAIN_CH1_1	—		CH1_SEQ1_AGAIN		0	0	0	0
0x000 0806 p. 207	PGA_CTRL_AGAIN_CH1_2	—		CH1_SEQ2_AGAIN		0	0	0	0
0x000 0807 p. 208	PGA_CTRL_AGAIN_CH1_3	—		CH1_SEQ3_AGAIN		0	0	0	0
0x000 0808 p. 208	PGA_CTRL_AGAIN_CH2_0	—		CH2_SEQ0_AGAIN		0	0	0	0
0x000 0809 p. 208	PGA_CTRL_AGAIN_CH3_0	—		CH3_SEQ0_AGAIN		0	0	0	0
0x000 080A p. 208	PGA_CTRL_AGAIN_CH4_0	—		CH4_SEQ0_AGAIN		0	0	0	0
0x000 0811 p. 209	PGA_CTRL_AGAIN_CH2_1	—		CH2_SEQ1_AGAIN		0	0	0	0
0x000 0812 p. 209	PGA_CTRL_AGAIN_CH2_2	—		CH2_SEQ2_AGAIN		0	0	0	0
0x000 0813 p. 209	PGA_CTRL_AGAIN_CH2_3	—		CH2_SEQ3_AGAIN		0	0	0	0
0x000 0815 p. 209	PGA_CTRL_AGAIN_CH3_1	—		CH3_SEQ1_AGAIN		0	0	0	0
0x000 0816 p. 210	PGA_CTRL_AGAIN_CH3_2	—		CH3_SEQ2_AGAIN		0	0	0	0
0x000 0817 p. 210	PGA_CTRL_AGAIN_CH3_3	—		CH3_SEQ3_AGAIN		0	0	0	0
0x000 0819 p. 210	PGA_CTRL_AGAIN_CH4_1	—		CH4_SEQ1_AGAIN		0	0	0	0

Address	Register	7	6	5	4	3	2	1	0
0x000 081A p. 210	PGA_CTRL_AGAIN_CH4_2	0	0	0	0	0	0	0	0
0x000 081B p. 211	PGA_CTRL_AGAIN_CH4_3	0	0	0	0	0	0	0	0

7.10 BLC_CTRL—BLC_CTRL

Address	Register	7	6	5	4	3	2	1	0
0x000 0900 p. 211	BLC_CTRL1_0	—	BLC_FINE_EVERYLINE	BLC_FINE_ACCUM	BLC_FINE_EN	—	BLC_COARSE_CYCLES		
0x000 0901 p. 211	BLC_CTRL1_1	BLC_TRACKING				—	BLC_FRAME_START		
0x000 0902 p. 212	BLC_CTRL1_2	BLC_LENGTH_0							
0x000 0903 p. 212	BLC_CTRL1_3	—	BLC_TARGET_RANGE		—	BLC_LENGTH_1			
0x000 0908 p. 212	BLC_TARGET_CH1_0	CH1_SEQ0_BLC_TARGET							
0x000 0909 p. 212	BLC_TARGET_CH1_1	CH1_SEQ1_BLC_TARGET							
0x000 090A p. 212	BLC_TARGET_CH1_2	CH1_SEQ2_BLC_TARGET							
0x000 090B p. 213	BLC_TARGET_CH1_3	CH1_SEQ3_BLC_TARGET							
0x000 090C p. 213	BLC_TARGET_CH2_0	CH2_SEQ0_BLC_TARGET							
0x000 090D p. 213	BLC_TARGET_CH2_1	CH2_SEQ1_BLC_TARGET							
0x000 090E p. 213	BLC_TARGET_CH2_2	CH2_SEQ2_BLC_TARGET							
0x000 090F p. 213	BLC_TARGET_CH2_3	CH2_SEQ3_BLC_TARGET							
0x000 0910 p. 213	BLC_TARGET_CH3_0	CH3_SEQ0_BLC_TARGET							
0x000 0911 p. 214	BLC_TARGET_CH3_1	CH3_SEQ1_BLC_TARGET							
0x000 0912 p. 214	BLC_TARGET_CH3_2	CH3_SEQ2_BLC_TARGET							
0x000 0913 p. 214	BLC_TARGET_CH3_3	CH3_SEQ3_BLC_TARGET							
0x000 0914 p. 214	BLC_TARGET_CH4_0	CH4_SEQ0_BLC_TARGET							
0x000 0915 p. 214	BLC_TARGET_CH4_1	CH4_SEQ1_BLC_TARGET							
0x000 0916 p. 214	BLC_TARGET_CH4_2	CH4_SEQ2_BLC_TARGET							
0x000 0917 p. 215	BLC_TARGET_CH4_3	CH4_SEQ3_BLC_TARGET							
0x000 0928 p. 215	BLC_OFFSET_CH1_0	CH1_BLC_OFFSET_0							

Address	Register	7	6	5	4	3	2	1	0
0x000 0929 p. 215	BLC_OFFSET_CH1_1	0	0	0	0	0	0	0	CH1_BLC_OFFSET_1 0
0x000 092C p. 215	BLC_OFFSET_CH2_0	0	0	0	0	0	0	0	CH2_BLC_OFFSET_0 0
0x000 092D p. 216	BLC_OFFSET_CH2_1	0	0	0	0	0	0	0	CH2_BLC_OFFSET_1 0
0x000 0930 p. 216	BLC_OFFSET_CH3_0	0	0	0	0	0	0	0	CH3_BLC_OFFSET_0 0
0x000 0931 p. 216	BLC_OFFSET_CH3_1	0	0	0	0	0	0	0	CH3_BLC_OFFSET_1 0
0x000 0934 p. 216	BLC_OFFSET_CH4_0	0	0	0	0	0	0	0	CH4_BLC_OFFSET_0 0
0x000 0935 p. 217	BLC_OFFSET_CH4_1	0	0	0	0	0	0	0	CH4_BLC_OFFSET_1 0

7.11 SARADC_1—SARADC_1

Address	Register	7	6	5	4	3	2	1	0
0x000 0A01 p. 217	SAR1_CTRL_1	0	0	0	0	0	CH1_POL 0	0	0
0x000 0A03 p. 217	SAR1_CTRL_3	0	0	0	0	0	0	CH1_AFE_POWER 1	1

7.12 SARADC_2—SARADC_2

Address	Register	7	6	5	4	3	2	1	0
0x000 0B01 p. 217	SAR2_CTRL_1	0	0	0	0	0	CH2_POL 0	0	0
0x000 0B03 p. 218	SAR2_CTRL_3	0	0	0	0	0	0	CH2_AFE_POWER 1	1

7.13 SARADC_3—SARADC_3

Address	Register	7	6	5	4	3	2	1	0
0x000 0C01 p. 218	SAR3_CTRL_1	0	0	0	0	0	CH3_POL 0	0	0
0x000 0C03 p. 218	SAR3_CTRL_3	0	0	0	0	0	0	CH3_AFE_POWER 1	1

7.14 SARADC_4—SARADC_4

Address	Register	7	6	5	4	3	2	1	0
0x000 0D01 p. 218	SAR4_CTRL_1	0	0	0	0	0	CH4_POL 0	0	0
0x000 0D03 p. 219	SAR4_CTRL_3	0	0	0	0	0	0	CH4_AFE_POWER 1	1

7.15 AGC_TOP—Digital Gain Control

Address	Register	7	6	5	4	3	2	1	0	
0x000 108C p. 219	DGAIN_SEQ01_CH1_0	CH1_SEQ0_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 108D p. 219	DGAIN_SEQ01_CH1_1	—				CH1_SEQ0_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 108E p. 220	DGAIN_SEQ01_CH1_2	CH1_SEQ1_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 108F p. 220	DGAIN_SEQ01_CH1_3	—				CH1_SEQ1_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 1090 p. 220	DGAIN_SEQ23_CH1_0	CH1_SEQ2_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 1091 p. 220	DGAIN_SEQ23_CH1_1	—				CH1_SEQ2_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 1092 p. 221	DGAIN_SEQ23_CH1_2	CH1_SEQ3_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 1093 p. 221	DGAIN_SEQ23_CH1_3	—				CH1_SEQ3_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 1094 p. 221	DGAIN_SEQ01_CH2_0	CH2_SEQ0_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 1095 p. 221	DGAIN_SEQ01_CH2_1	—				CH2_SEQ0_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 1096 p. 222	DGAIN_SEQ01_CH2_2	CH2_SEQ1_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 1097 p. 222	DGAIN_SEQ01_CH2_3	—				CH2_SEQ1_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 1098 p. 222	DGAIN_SEQ23_CH2_0	CH2_SEQ2_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 1099 p. 222	DGAIN_SEQ23_CH2_1	—				CH2_SEQ2_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 109A p. 223	DGAIN_SEQ23_CH2_2	CH2_SEQ3_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 109B p. 223	DGAIN_SEQ23_CH2_3	—				CH2_SEQ3_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 109C p. 223	DGAIN_SEQ01_CH3_0	CH3_SEQ0_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 109D p. 223	DGAIN_SEQ01_CH3_1	—				CH3_SEQ0_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 109E p. 224	DGAIN_SEQ01_CH3_2	CH3_SEQ1_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 109F p. 224	DGAIN_SEQ01_CH3_3	—				CH3_SEQ1_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 10A0 p. 224	DGAIN_SEQ23_CH3_0	CH3_SEQ2_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 10A1 p. 224	DGAIN_SEQ23_CH3_1	—				CH3_SEQ2_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 10A2 p. 225	DGAIN_SEQ23_CH3_2	CH3_SEQ3_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 10A3 p. 225	DGAIN_SEQ23_CH3_3	—				CH3_SEQ3_DGAIN_1				
		0	0	0	0	1	0	0	0	
0x000 10A4 p. 225	DGAIN_SEQ01_CH4_0	CH4_SEQ0_DGAIN_0								
		0	0	0	0	0	0	0	0	
0x000 10A5 p. 225	DGAIN_SEQ01_CH4_1	—				CH4_SEQ0_DGAIN_1				
		0	0	0	0	1	0	0	0	

Address	Register	7	6	5	4	3	2	1	0
0x000 10A6 p. 226	DGAIN_SEQ01_CH4_2	0	0	0	0	0	0	0	0
0x000 10A7 p. 226	DGAIN_SEQ01_CH4_3	0	0	—	0	1	0	0	0
0x000 10A8 p. 226	DGAIN_SEQ23_CH4_0	0	0	0	0	0	0	0	0
0x000 10A9 p. 226	DGAIN_SEQ23_CH4_1	0	0	—	0	1	0	0	0
0x000 10AA p. 227	DGAIN_SEQ23_CH4_2	0	0	0	0	0	0	0	0
0x000 10AB p. 227	DGAIN_SEQ23_CH4_3	0	0	—	0	1	0	0	0

7.16 PAT_GEN—Test pattern generator

Address	Register	7	6	5	4	3	2	1	0
0x000 1100 p. 227	PGCONFIG_0	PGEN_MARCH 0	PGEN_PATT_SEL 0 0		PGEN_INV 0	0	— 0	0	PGEN_EN 0
0x000 1102 p. 228	PGCONFIG_2	0	0	0	0	0	0	0	0
0x000 1103 p. 228	PGCONFIG_3	0	0	0	0	0	0	0	0
0x000 1104 p. 228	PGWIDTH_0	0	0	0	0	0	0	0	0
0x000 1105 p. 228	PGWIDTH_1	0	0	0	0	0	0	0	0

7.17 LED_CTRL—LED Control

Address	Register	7	6	5	4	3	2	1	0
0x000 1500 p. 228	LED_CTRL_CONFIG_0	0	0	— 0	0	LED_CTRL_SRC 0	LEDB_EN 0	LEDG_EN 0	LEDR_EN 0
0x000 1501 p. 229	LED_CTRL_CONFIG_1	0	0	— 0	0	LED_RAMP_TIME 0 0 0 0			
0x000 1502 p. 229	LED_CTRL_CONFIG_2	LED_RAMP_BOOST 0	0	LEDB_COARSE 0 0		LEDG_COARSE 0 0		LEDR_COARSE 0 0	
0x000 1504 p. 229	LEDX_FINE_0	0	0	0	0	0	0	0	0
0x000 1505 p. 230	LEDX_FINE_1	0	0	0	0	0	0	0	0
0x000 1506 p. 230	LEDX_FINE_2	0	0	0	0	0	0	0	0
0x000 1508 p. 230	LED_CTRL_STATUS	0	0	0	LED_MAX_CURRENT_ERR 0	LED_CTRL_SHORT_ERR 0	0	— 0	0

7.18 DPLL1—DPLL1

Address	Register	7	6	5	4	3	2	1	0
0x000 1700 p. 230	DPLL1_DFLL_DIVIDER_CTRL_0	0	0	1	0	0	0	0	— 0

Address	Register	7	6	5	4	3	2	1	0	
0x000 1701 p. 231	DPLL1_DFLL_DIVIDER_CTRL_1	PLL1_VCO_RANGE			—		PLL1_OUTPUT1_DIV_1			
		0	0	0	0	0	0	0	0	
0x000 1702 p. 231	DPLL1_DFLL_DIVIDER_CTRL_2	PLL1_OUTPUT2_DIV_0							PLL1_OUTPUT2_EN	
		0	0	1	0	0	0	0	0	
0x000 1703 p. 231	DPLL1_DFLL_DIVIDER_CTRL_3	PLL1_REFCLK_DIV_RATIO				PLL1_REFCLK_DIV_BYPASS	—	PLL1_OUTPUT2_DIV_1		
		0	0	0	0	1	0	0	0	
0x000 1704 p. 231	DPLL1_DFLL_FEEDBACK_RATIO_0	PLL1_RATIO_0								
		0	0	0	0	0	0	0	0	
0x000 1705 p. 232	DPLL1_DFLL_FEEDBACK_RATIO_1	PLL1_RATIO_1								
		0	0	0	0	0	0	0	0	
0x000 1706 p. 232	DPLL1_DFLL_FEEDBACK_RATIO_2	PLL1_RATIO_2								
		0	0	0	1	0	0	0	0	
0x000 1707 p. 232	DPLL1_DFLL_FEEDBACK_RATIO_3	—	PLL1_MODE		PLL1_RATIO_3					
		0	0	0	0	0	0	0	0	
0x000 1708 p. 232	DPLL1_DFLL_FEATURES_0	PLL1_VCO_GAIN				PLL1_CP_IBIAS			PLL1_PHASE_DET_PAUSE_EN	
		1	0	0	0	0	1	0	0	
0x000 1709 p. 232	DPLL1_DFLL_FEATURES_1	—				PLL1_FILT				
		0	0	0	0	0	0	0	1	

8 Register Descriptions—Flat Register Mode (I2C or SPI)

This section describes each of the control port registers.

- This register view is for the CS82L44 4-channel imaging AFE/ADC, using the flat host-interface configuration.
- The register field default values are established on power-up and after soft reset.
- A "—" represents a reserved field/access type.
- The reserved field values must not be modified.
- The registers are 8 bits wide.
- All visible fields are read/write except where indicated with the following shading:

Read/write access
 Read-only access
 Write-only access

8.1 SW_RESET—Software Reset and Hardware ID

8.1.1 BANK

Address: 0x000 0000
BANKn (n = 0–7) Address: 0x00

	7	6	5	4	3	2	1	0
Access	DESCRIM				—	BANK		
Default	1	1	0	0	0	0	0	0

Bits	Name	Description
7:4	DESCRIM	Read-only device identifier field. Readback value is 0xC.
3	—	Reserved
2:0	BANK	Bank select. Selects the active bank in Banked SPI Mode. In I2C Mode and SPI Flat Mode, this field should always be set to 0x0. 000 = (Default) Bank 0 100 = Bank 4 001 = Bank 1 101 = Bank 5 010 = Bank 2 110 = Bank 6 011 = Bank 3 111 = Bank 7

8.1.2 SFT_RESET

Address: 0x000 0008
BANKn (n = 0–7) Address: 0x08

WO	7	6	5	4	3	2	1	0
	SFT_RESET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	SFT_RESET	Software reset. Write 0x5A to execute a software reset. 0x00 = (Default) No action 0x5A = Software reset 0x01–0x59 = Reserved 0x5B–0xFF = Reserved

8.1.3 DEVID_0

Address: 0x000 000C
BANK0 Address: 0x0C

RO	7	6	5	4	3	2	1	0
	DEVID_0							
Default	0	1	0	0	0	1	0	0

Bits	Name	Description
7:0	DEVID_0	Device ID (Byte 0)

8.1.4 DEVID_1
Address: 0x000 000D
BANK0 Address: 0x0D

RO	7	6	5	4	3	2	1	0
	DEVID_1							
Default	0	0	1	0	1	0	1	0

Bits	Name	Description
7:0	DEVID_1	Device ID (Byte 1)

8.1.5 DEVID_2
Address: 0x000 000E
BANK0 Address: 0x0E

RO	7	6	5	4	3	2	1	0
	DEVID_2							
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:0	DEVID_2	Device ID (Byte 2)

8.1.6 REVID
Address: 0x000 0010
BANK0 Address: 0x10

RO	7	6	5	4	3	2	1	0
	AREVID				MTLREVID			
Default	1	0	1	1	0	0	0	0

Bits	Name	Description
7:4	AREVID	All-layer device revision. This field is incremented for every all-layer revision of the device.
3:0	MTLREVID	Metal-layer device revision. This field is incremented for every metal-layer revision of the device.

8.1.7 RELID
Address: 0x000 0014
BANK0 Address: 0x14

RO	7	6	5	4	3	2	1	0
	RELID							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	RELID	Software device revision. This field is incremented if software-driver compatibility or software feature support is changed.

8.2 CTRL_ASYNC—Async control
8.2.1 ASYNC0_0
Address: 0x000 0100
BANKn (n = 0–7) Address: 0x04

RO	7	6	5	4	3	2	1	0
	—		ACTIVE_ERROR_STS	TEMP_ERROR_STS	PLL_ERROR_STS	MCLK_ERROR_STS	STARTUP_ERROR_STS	BOOT_ERROR_STS
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5	ACTIVE_ERROR_STS	Path error status. Indicates an error condition in the Active or Ready states. 0 = (Default) Normal 1 = Error
4	TEMP_ERROR_STS	Temperature error status. Indicates an overtemperature condition has been detected. 0 = (Default) Normal 1 = Error
3	PLL_ERROR_STS	PLL error status. Indicates a PLL1 error condition. 0 = (Default) Normal 1 = Error

Bits	Name	Description
2	MCLK_ERROR_STS	MCLK error status. Indicates MCLK is invalid or absent in the Idle State. 0 = (Default) Normal 1 = Error
1	STARTUP_ERROR_STS	Start up error status. Indicates an error detected during start-up. 0 = (Default) Normal 1 = Error
0	BOOT_ERROR_STS	Boot error status. Indicates an error detected during boot. 0 = (Default) Normal 1 = Error

8.2.2 ASYNC0_1

Address: 0x000 0101
BANKn (n = 0–7) Address: 0x05

RW	7	6	5	4	3	2	1	0
				—				OSC_DISABLE
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:1	—	Reserved
0	OSC_DISABLE	Oscillator disable. Setting this bit places the device in a low-power Sleep State. Note that the host must return the device to the Idle State before writing to any other control registers. 0 = (Default) RCO enabled 1 = RCO disabled

8.3 CCM—Device Clocking and Sample Rate Control

8.3.1 DEVICE_CLK_CFG_0

Address: 0x000 0200
BANK0 Address: 0x18

RW	7	6	5	4	3	2	1	0
					PIXEL_SAMPLE_RATE			
Default	0	1	1	1	1	0	0	0

Bits	Name	Description
7:0	PIXEL_SAMPLE_RATE	Pixel sample rate (2-24 MHz, in 100 kHz steps) In TG Mode, the pixel rate is derived from MCLK_EXT – either directly, or else using PLL1 to synthesize a different frequency. In External Mode, the pixel rate is a fraction of the MCLK_EXT frequency, depending on the selected output data format. 0x00–0x13 = Reserved 0x14 = 2,000 kHz 0x15 = 2,100 kHz ... 0x78 = (Default) 12,000 kHz ... 0xF0 = 24,000 kHz 0xF1–0xFF = Reserved

8.3.2 DEVICE_CLK_CFG_1

Address: 0x000 0201
BANK0 Address: 0x19

RW	7	6	5	4	3	2	1	0
		—			EXT_AFECK_DUR		CLOCK_CFG_MODE	
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:5	—	Reserved
4:2	EXT_AFECK_DUR	AFECK pulse duration for External Mode 000 = (Default) 0.5 cycle 001 = 1.0 cycle 010 = 1.5 cycle 011 = 2.0 cycle 100 = 2.5 cycle 101 = 3.0 cycle 110 = 3.5 cycle 111 = 4.0 cycle
1:0	CLOCK_CFG_MODE	Clocking Mode (PLL/DLL connectivity). Valid for TG Mode. 00 = Mode 0 (DLL1 → PLL2) 01 = (Default) Mode 1 (PLL1 → (DLL1+PLL2 parallel)) 10 = Mode 2 (PLL1 → DLL1 → PLL2) 11 = Reserved

8.3.3 DEVICE_CLK_CFG_2
Address: 0x000 0202
BANK0 Address: 0x1A

RW	7	6	5	4	3	2	1	0
							PLL2_AUTO	PLL1_AUTO
Default	0	0	0	0	0	0	1	1

Bits	Name	Description
7:2	—	Reserved
1	PLL2_AUTO	PLL2 division ratio auto-calculation 0 = Disabled 1 = (Default) Enabled
0	PLL1_AUTO	PLL1 division ratio auto-calculation 0 = Disabled 1 = (Default) Enabled

8.3.4 DEVICE_CLK_CFG_3
Address: 0x000 0203
BANK0 Address: 0x1B

RW	7	6	5	4	3	2	1	0
	PLL2_SS_FREQ			PLL2_SS_MAG			PLL2_SS_EN	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	PLL2_SS_FREQ	Set frequency of PLL2 Spread Spectrum 000 = (Default) Reserved 001 = 12.50 kHz 010 = 18.75 kHz 011 = 25.00 kHz 100 = 31.25 kHz 101 = 37.50 kHz 110–111 = Reserved
4:1	PLL2_SS_MAG	Set magnitude of PLL2 Spread Spectrum 0x0 = (Default) '0.125%' 0x1 = '0.25%' 0x2 = '0.5%' 0x3 = '0.75%' 0x4 = '1.0%' 0x5 = '1.25%' 0x6 = '1.5%' 0x7 = '2.0%' 0x8–0xF = Reserved
0	PLL2_SS_EN	Enable Spread Spectrum for PLL2 0 = (Default) Disabled 1 = Enabled

8.3.5 DEVICE_CLK_CFG2_2
Address: 0x000 0206
BANK0 Address: 0x1E

RW	7	6	5	4	3	2	1	0
	PLL2_SS_REF_FREQ_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PLL2_SS_REF_FREQ_0	Reference frequency for Spread Spectrum modulation. Valid from 2-72 MHz. Bits[7:0] of a 10-bit field 0x00 = (Default) Automatic 0x01–0x13 = Reserved 0x14 = 2,000 kHz 0x15 = 2,100 kHz ... 0xFF = 25,500 kHz

8.3.6 DEVICE_CLK_CFG2_3
Address: 0x000 0207
BANK0 Address: 0x1F

RW	7	6	5	4	3	2	1	0
	DOUT_READY_EN	—		MCLK_EXT_SS	—		PLL2_SS_REF_FREQ_1	
Default	1	0	0	0	0	0	0	0

Bits	Name	Description
7	DOUT_READY_EN	Enables data output in the Ready State. (Data output is always enabled in the Active State.) 0 = Data output in Active State only 1 = (Default) Data output in Ready and Active states
6:5	—	Reserved

Bits	Name	Description
4	MCLK_EXT_SS	If spread-spectrum modulation is present on the external MCLK signal, this bit must be set 0 = (Default) Spread-spectrum not present on external MCLK 1 = Spread-spectrum is present on external MCLK
3:2	—	Reserved
1:0	PLL2_SS_REF_FREQ_1	Reference frequency for Spread Spectrum modulation. Valid from 2-72 MHz. Bits[9:8] of a 10-bit field

8.3.7 MCLK_FILT_CFG_0

Address: 0x000 0208
BANK0 Address: 0x20

RW	7	6	5	4	3	2	1	0
	MCLK_MASK_DLY_0							
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:0	MCLK_MASK_DLY_0	MCLK mask delay. Selects the time between the trigger condition asserted and the start of the mask period. The clock period is configured using MCLK_MASK_CLK_DIV. Bits[7:0] of a 16-bit field 0x00 = 8 MCLK + 1 clock period 0x01 = (Default) 8 MCLK + 2 clock periods ... 0xFF = 8 MCLK + 256 clock periods

8.3.8 MCLK_FILT_CFG_1

Address: 0x000 0209
BANK0 Address: 0x21

RW	7	6	5	4	3	2	1	0
	MCLK_MASK_DLY_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	MCLK_MASK_DLY_1	MCLK mask delay. Selects the time between the trigger condition asserted and the start of the mask period. The clock period is configured using MCLK_MASK_CLK_DIV. Bits[15:8] of a 16-bit field

8.3.9 MCLK_FILT_CFG_2

Address: 0x000 020A
BANK0 Address: 0x22

RW	7	6	5	4	3	2	1	0
	MCLK_MASK_POL	MCLK_MASK_EN	MCLK_MASK_DUR					
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7	MCLK_MASK_POL	Select trigger polarity for MCLK mask 0 = (Default) Rising edge 1 = Falling edge
6	MCLK_MASK_EN	Enable MCLK mask logic 0 = (Default) Disabled 1 = Enabled
5:0	MCLK_MASK_DUR	MCLK mask duration. The clock period is configured using MCLK_MASK_CLK_DIV. 0x00 = 1 clock periods 0x01 = (Default) 2 clock periods 0x0F = 16 clock periods 0x10–0x3F = Reserved ...

Bits	Name	Description
1	READY_EN	Selects READY state. After the device has been configured, this bit causes a transition from IDLE to the READY state. 0 = (Default) No action 1 = Select READY state
0	MSM_EN	Enables the main state machine (MSM) control. This bit must be set to support any operational control. 0 = Disabled. Operational control not supported. 1 = (Default) Enabled. Operational control is enabled.

8.4.2 DEVICE_CTRL_1

Address: 0x000 0301
BANK0 Address: 0x29

RW	7	6	5	4	3	2	1	0
	TEMP_ERROR_RST_MASK	—	TEMP_ERROR_CLR			—		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	TEMP_ERROR_RST_MASK	Selects whether an overtemperature error causes a system reset. 0 = (Default) Disabled. Device reset is triggered on overtemperature. 1 = Enabled. Device shuts down on overtemperature, but does not trigger a reset.
6	—	Reserved
5	TEMP_ERROR_CLR	Following an overtemperature error, this bit enables a transition to the IDLE state (provided the error has cleared). This bit should be cleared by the host after the device has entered the IDLE state. 0 = (Default) No action 1 = Clear the overtemperature error and move to IDLE state
4:0	—	Reserved

8.4.3 DEVICE_CTRL_2

Address: 0x000 0302
BANK0 Address: 0x2A

RW	7	6	5	4	3	2	1	0
	LDO4_HIZ	—	LDO_EN_MASK	LDO5_EN	LDO5_ILIMIT_VPC		LDO5_ILIMIT_CTRL	
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7	LDO4_HIZ	Configures the LDO4 output floating (HiZ). 0 = (Default) LDO4 discharged when disabled 1 = LDO4 output HiZ
6	—	Reserved
5	LDO_EN_MASK	Masks the LDO_EN control input. If masked, the LDO_EN pin has no effect on the LDO4/LDO5 regulators. 0 = (Default) Unmasked. LDO4/LDO5 enabled if LDO_EN is asserted 1 = Masked. LDO_EN pin has no control over LDO4/LDO5
4	LDO5_EN	LDO5 Enable. Generates power for external sensor or VDD_IO. Note that LDO5 can also be enabled using the LDO_EN input pin. 0 = (Default) Disabled 1 = Enabled
3	LDO5_ILIMIT_VPC	Enables voltage-proportional control (VPC) for LDO5 current limit 0 = Disabled. Current limit set by LDO5_ILIMIT_CTRL 1 = (Default) Enabled. Current limit scales with output voltage
2:0	LDO5_ILIMIT_CTRL	LDO5 current limit (assumes VPC proportional control is disabled). If VPC is enabled (LDO5_ILIMIT_VPC=1), the current limit scales with output voltage. If VPC is enabled, the selected current limit must not exceed 260 mA. 000 = (Default) 195 mA 001 = 130 mA 010 = 65 mA 011 = Reserved 100 = 455 mA (Do not use if VPC is enabled) 101 = 390 mA (Do not use if VPC is enabled) 110 = 325 mA (Do not use if VPC is enabled) 111 = 260 mA

8.4.4 DEVICE_CTRL_3
Address: 0x000 0303
BANK0 Address: 0x2B

RW	7	6	5	4	3	2	1	0
		—				LDO5_VOUT		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4:0	LDO5_VOUT	LDO5 output voltage 0x00 = (Default) 3.424 V 0x01 = 3.492 V 0x02 = 3.56 V 0x03–0x19 = Reserved 0x1A = 3.016 V 0x1B = 3.084 V 0x1C = 3.152 V 0x1D = 3.22 V 0x1E = 3.288 V 0x1F = 3.356 V

8.4.5 RLCDAC_CTRL_0
Address: 0x000 0304
BANK0 Address: 0x2C

RW	7	6	5	4	3	2	1	0
				—				VBIAS_EN
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:1	—	Reserved
0	VBIAS_EN	VBIAS enable 0 = (Default) VBIAS disabled 1 = VBIAS enabled in READY and ACTIVE states

8.4.6 RLCDAC_CTRL_1
Address: 0x000 0305
BANK0 Address: 0x2D

RW	7	6	5	4	3	2	1	0
		—				VBIAS_LVL		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4:0	VBIAS_LVL	VBIAS output level 0x00 = (Default) 0.17 V 0x01 = 0.25 V ... 0x1F = 2.65 V

8.4.7 RLCDAC_CTRL_2
Address: 0x000 0306
BANK0 Address: 0x2E

RW	7	6	5	4	3	2	1	0
		—			VBIAS_ISEL_BOOST	VBIAS_ISEL		VBIAS_REF
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:4	—	Reserved
3	VBIAS_ISEL_BOOST	VBIAS output drive strength doubler 0 = (Default) No doubling of current reference 1 = Double current reference
2:1	VBIAS_ISEL	VBIAS output drive strength. Note the drive strength is doubled if VBIAS_ISEL_BOOST is set. 00 = (Default) 2 mA 01 = 3 mA 10 = 4 mA 11 = Reserved
0	VBIAS_REF	VBIAS reference select 0 = Reference is VDDA 1 = (Default) Reference is VREF

8.4.8 DEVICE_STATUS_0
Address: 0x000 0310
BANK0 Address: 0x34

RO	7	6	5	4	3	2	1	0
	ERROR_STS	—	ACTIVE_STS	READY_STS	—	—	IDLE_STS	STARTUP_STS
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	ERROR_STS	Indicates the device is in the ERROR state. 0 = (Default) Not in ERROR state 1 = ERROR state
6	—	Reserved
5	ACTIVE_STS	Indicates the device is in the ACTIVE state. This is the fully operational state, supporting active sampling and data output. 0 = (Default) Not in ACTIVE state 1 = ACTIVE state
4	READY_STS	Indicates the device is in the READY state. The analog input path and internal clocking circuits are fully enabled. The data-output interface is enabled (assuming DOUT_READY_EN=1), ready to support sample data in the configured format. 0 = (Default) Not in READY state 1 = READY state
3:2	—	Reserved
1	IDLE_STS	Indicates the device is in the Idle State. This is a low-power state in which the device can be configured for the required operational behavior. 0 = (Default) Not in IDLE state 1 = IDLE state
0	STARTUP_STS	Indicates the device is in the Startup State. This is the initial state following reset, in which the device performs necessary start-up processes. 0 = (Default) Not in STARTUP state 1 = STARTUP state

8.4.9 DEVICE_STATUS_2
Address: 0x000 0312
BANK0 Address: 0x36

RO	7	6	5	4	3	2	1	0
	VDDA_STS	—	—	—	—	—	—	—
Default	0	0	0	0	0	1	0	0

Bits	Name	Description
7	VDDA_STS	VDD_A status. Indicates whether a valid VDD_A supply is present. 0 = (Default) VDD_A is present 1 = VDD_A is not present.
6:0	—	Reserved

8.5 TIM_GEN—Sensor Timing Generator
8.5.1 TG_CONFIG1_0
Address: 0x000 0400
BANK0 Address: 0x48

RW	7	6	5	4	3	2	1	0
	VSMP_EXT_POL	EXTERNAL_MODE_TG_EN	CDS_EN	CLAMP_EN	CLAMP_MODE	—	TGSYNC_MODE	EXTERNAL_MODE_EN
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7	VSMP_EXT_POL	External Mode 2, VSMP polarity 0 = (Default) VSMP is detected at rising edge of input pad 1 = VSMP is detected at falling edge of input pad
6	EXTERNAL_MODE_TG_EN	Enable TG timer in External Mode 0 = (Default) Disabled 1 = Enabled

Bits	Name	Description
5	CDS_EN	AFE cds mode enable 0 = (Default) non CDS Sampling 1 = CDS Sampling
4	CLAMP_EN	AFE clamp enable 0 = (Default) Disable Clamp 1 = Enable Clamp
3:2	CLAMP_MODE	AFE clamp operation mode select 00 = (Default) Enabled for all pixels 01 = Controlled by clamp start/end 10 = Controlled by external RSMP 11 = Reserved
1	TGSYNC_MODE	Device master/slave selection 0 = (Default) TGSYNC output (master) 1 = TGSYNC input (slave)
0	EXTERNAL_MODE_EN	Device mode selection 0 = TG Mode 1 = (Default) External Mode

8.5.2 TG_CONFIG1_1

Address: 0x000 0401
BANK0 Address: 0x49

RW	7	6	5	4	3	2	1	0
	INIT_SEQ_STATE		VSMP_EXT_DLY				EXTERNAL_MODE_SEL	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	INIT_SEQ_STATE	Selects the initial sequence state 00 = (Default) State 0 01 = State 1 10 = State 2 11 = State 3
5:1	VSMP_EXT_DLY	External Mode 2, internal VSMP latency from VSMP_EXT input 0x00 = (Default) 1 clocks 0x01 = 2 clocks ... 0x1F = 32 clocks
0	EXTERNAL_MODE_SEL	External Mode select In External Mode 2, VSMP/RSMP are internally re-generated from VSMP_EXT signal. 0 = (Default) External Mode 1 1 = External Mode 2

8.5.3 TG_CONFIG1_2

Address: 0x000 0402
BANK0 Address: 0x4A

RW	7	6	5	4	3	2	1	0
	—	TGSYNC_SINGLE_SEQ	NUM_SEQ_STATES		RSMP_EXT_DLY			
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7	—	Reserved
6	TGSYNC_SINGLE_SEQ	Cycle mode selection, valid for TG Input Mode only Multi Cycle: one TGSYNC pulse triggers a full cycle of the configured number of states Single Cycle: a TGSYNC pulse is required for each state transition 0 = (Default) Multi Cycle 1 = Single Cycle
5:4	NUM_SEQ_STATES	Number of sequence states 00 = (Default) 1 state 01 = 2 states 10 = 3 states 11 = 4 states
3:0	RSMP_EXT_DLY	External Mode 2, internal RSMP latency from internal VSMP 0x0 = 2 clocks 0x1 = (Default) 3 clocks ... 0xF = 17 clocks

8.5.4 TG_CONFIG1_3
Address: 0x000 0403
BANK0 Address: 0x4B

RW	7	6	5	4	3	2	1	0
			—		CH4_CLAMP_OVRD	CH3_CLAMP_OVRD	CH2_CLAMP_OVRD	CH1_CLAMP_OVRD
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3	CH4_CLAMP_OVRD	AFE clamp override switch control for CH4 0 = (Default) Disabled 1 = Enabled
2	CH3_CLAMP_OVRD	AFE clamp override switch control for CH3 0 = (Default) Disabled 1 = Enabled
1	CH2_CLAMP_OVRD	AFE clamp override switch control for CH2 0 = (Default) Disabled 1 = Enabled
0	CH1_CLAMP_OVRD	AFE clamp override switch control for CH1 0 = (Default) Disabled 1 = Enabled

8.5.5 TG_STATUS
Address: 0x000 040C
BANK2 Address: 0x0C

RO	7	6	5	4	3	2	1	0
				—			SEQ_STATE_STS	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:2	—	Reserved
1:0	SEQ_STATE_STS	current sequence state 00 = (Default) State 0 01 = State 1 10 = State 2 11 = State 3

8.5.6 TG_CONFIG2_0
Address: 0x000 0410
BANK2 Address: 0x10

RW	7	6	5	4	3	2	1	0
Default	0	0	0	0	0	1	0	0

Bits	Name	Description
7:6	—	Reserved
5	LEDSTART_POL	LEDSTART input polarity. Selects the active edge of the LEDSTART input. 0 = (Default) Rising 1 = Falling
4	LEDSTART_SEQ_INIT	Sequence start condition selection If this bit is set, the TG sequence can only be initiated using the TGSYNC and LEDSTART signals together. 0 = (Default) TGSYNC 1 = TGSYNC and LEDSTART
3	TGSYNC_ASYNC	TGSYNC Asynchronous Mode (synchroniser enable) This register is ignored if TGSYNC_FILT_EN = 1 0 = (Default) Sync Mode (internal synchroniser disabled) 1 = Async Mode (internal synchroniser enabled)
2	TGSYNC_IN_POL	TGSYNC input polarity. Selects the active edge of the selected TGSYNC input. 0 = Rising 1 = (Default) Falling
1:0	TGSYNC_IN_SRC	TGSYNC input source selection 00 = (Default) TGSYNC1 01 = TGSYNC2 10 = LEDSTART 11 = Reserved

8.5.7 TG_CONFIG2_1
Address: 0x000 0411
BANK2 Address: 0x11

RW	7	6	5	4	3	2	1	0
	—	TGSYNC_OUT_DUR			TGSYNC_IN_OFFSET			
Default	0	0	1	0	0	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	TGSYNC_OUT_DUR	TGSYNC output pulse width in Master Mode 000 = 1 clocks 001 = 2 clocks 010 = (Default) 3 clocks ... 111 = 8 clocks
3:0	TGSYNC_IN_OFFSET	TGSYNC input offset delay for Slave Mode (TGSYNC input) 0x0 = (Default) 0 clocks 0x1 = 1 clocks ... 0xF = 15 clocks

8.5.8 TG_CONFIG2_2
Address: 0x000 0412
BANK2 Address: 0x12

RW	7	6	5	4	3	2	1	0
	—	TGSYNC_FILT_STAGE			TGSYNC_FILT_DECM			TGSYNC_FILT_EN
Default	0	1	0	0	0	1	1	0

Bits	Name	Description
7	—	Reserved
6:4	TGSYNC_FILT_STAGE	TGSYNC filter stage selection 000 = 2 stage 001 = 4 stage 010 = 6 stage 011 = 8 stage 100 = (Default) 10 stage 101–111 = Reserved
3:1	TGSYNC_FILT_DECM	TGSYNC filter decimation frequency division ratio 000 = 1 divs 001 = 2 divs ... 111 = 8 divs
0	TGSYNC_FILT_EN	TGSYNC input filter enable 0 = (Default) Disabled 1 = Enabled

8.5.9 TG_CONFIG2_3
Address: 0x000 0413
BANK2 Address: 0x13

RW	7	6	5	4	3	2	1	0
	—	TP_SEC_OFFSET						
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	TP_SEC_OFFSET	Toggle point subsequence offset Toggle points (TPn) with an index less than the offset are associated with the primary counter Toggle points with an index greater than or equal to the offset are associated with the secondary counter

8.5.10 TG_CONFIG3_0
Address: 0x000 0414
BANK2 Address: 0x14

RW	7	6	5	4	3	2	1	0
	LEDG_PO_SEL				LEDR_PO_SEL			
Default	0	0	0	1	0	0	0	0

Bits	Name	Description
7:4	LEDG_PO_SEL	LEDG pulse signal selection from PO0 to PO10 0x0 = Pulse Output PO0 0x1 = (Default) Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
3:0	LEDR_PO_SEL	LEDR pulse signal selection from PO0 to PO10 0x0 = (Default) Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved

8.5.11 TG_CONFIG3_1
Address: 0x000 0415
BANK2 Address: 0x15

RW	7	6	5	4	3	2	1	0
	DC_PO_2ND_PULSE	NUM_DC_PO			LEDB_PO_SEL			
Default	0	0	0	0	0	0	1	0

Bits	Name	Description
7	DC_PO_2ND_PULSE	Enable second rise/fall pulse for direct-controlled PO pulse signals. Second pulse is configured using TP20_PIXEL through TP31_PIXEL. 0 = (Default) Disabled 1 = Enabled
6:4	NUM_DC_PO	Select the number of direct-controlled PO pulse signals. Direct-control PO is configured using POx_TP_POL. 000 = (Default) None 001 = 1 (PO10) 010 = 2 (PO9-PO10) 011 = 3 (PO8-PO10) 100 = 4 (PO7-PO10) 101 = 5 (PO6-PO10) 110 = 6 (PO5-PO10) 111 = Reserved
3:0	LEDB_PO_SEL	LEDB pulse signal selection from PO0 to PO10 0x0 = Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = (Default) Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved

8.5.12 TG_CONFIG3_2
Address: 0x000 0416
BANK2 Address: 0x16

RW	7	6	5	4	3	2	1	0
	FLAG_DEN2_PO_SEL				FLAG_DEN1_PO_SEL			
Default	1	0	0	1	1	0	0	1

Bits	Name	Description
7:4	FLAG_DEN2_PO_SEL	FLAG_DEN2 pulse signal selection from PO0 to PO10 0x0 = Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = (Default) Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
3:0	FLAG_DEN1_PO_SEL	FLAG_DEN1 pulse signal selection from PO0 to PO10 This is data flag signal for lvds trigger This signal has the same latency as ADC pipeline delay 0x0 = Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = (Default) Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved

8.5.13 TG_CONFIG3_3
Address: 0x000 0417
BANK2 Address: 0x17

RW	7	6	5	4	3	2	1	0
	—		FLAG_PIX2_PO_EDGE		FLAG_PIX2_PO_SEL			
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:6	—	Reserved
5:4	FLAG_PIX2_PO_EDGE	FLAG_PIX2 Pulse Output (PO) edge trigger option 00 = (Default) Disabled 01 = Rising Edge 10 = Falling Edge 11 = Both Edges
3:0	FLAG_PIX2_PO_SEL	FLAG_PIX2 pulse signal selection from PO0 to PO10 0x0 = Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = (Default) Pulse Output PO10 0xB–0xF = Reserved

8.5.14 SEQ_DURATION0_0
Address: 0x000 0418
BANK2 Address: 0x18

RW	7	6	5	4	3	2	1	0
	SEQ_STATE0_LEN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	SEQ_STATE0_LEN_0	Sequence State 0 period (number of pixels in State 0) Bits[7:0] of a 16-bit field.

8.5.15 SEQ_DURATION0_1
Address: 0x000 0419
BANK2 Address: 0x19

RW	7	6	5	4	3	2	1	0
	SEQ_STATE0_LEN_1							
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:0	SEQ_STATE0_LEN_1	Sequence State 0 period (number of pixels in State 0) Bits[15:8] of a 16-bit field.

8.5.16 SEQ_DURATION0_2
Address: 0x000 041A
BANK2 Address: 0x1A

RW	7	6	5	4	3	2	1	0
	SEQ_STATE1_LEN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	SEQ_STATE1_LEN_0	Sequence State 1 period (number of pixels in State 1) Bits[7:0] of a 16-bit field.

8.5.17 SEQ_DURATION0_3
Address: 0x000 041B
BANK2 Address: 0x1B

RW	7	6	5	4	3	2	1	0
	SEQ_STATE1_LEN_1							
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:0	SEQ_STATE1_LEN_1	Sequence State 1 period (number of pixels in State 1) Bits[15:8] of a 16-bit field.

8.5.18 SEQ_DURATION1_0
Address: 0x000 041C
BANK2 Address: 0x1C

RW	7	6	5	4	3	2	1	0
	SEQ_STATE2_LEN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	SEQ_STATE2_LEN_0	Sequence State 2 period (number of pixels in State 2) Bits[7:0] of a 16-bit field.

8.5.19 SEQ_DURATION1_1
Address: 0x000 041D
BANK2 Address: 0x1D

RW	7	6	5	4	3	2	1	0
	SEQ_STATE2_LEN_1							
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:0	SEQ_STATE2_LEN_1	Sequence State 2 period (number of pixels in State 2) Bits[15:8] of a 16-bit field.

8.5.20 SEQ_DURATION1_2
Address: 0x000 041E
BANK2 Address: 0x1E

RW	7	6	5	4	3	2	1	0
	SEQ_STATE3_LEN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	SEQ_STATE3_LEN_0	Sequence State 3 period (number of pixels in State 3) Bits[7:0] of a 16-bit field.

8.5.21 SEQ_DURATION1_3
Address: 0x000 041F
BANK2 Address: 0x1F

RW	7	6	5	4	3	2	1	0
	SEQ_STATE3_LEN_1							
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:0	SEQ_STATE3_LEN_1	Sequence State 3 period (number of pixels in State 3) Bits[15:8] of a 16-bit field.

8.5.22 TG_TIMING_CFG0_0
Address: 0x000 0420
BANK2 Address: 0x20

RW	7	6	5	4	3	2	1	0
	CK_MASK1_START_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK1_START_0	CK_MASK1 start position This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.23 TG_TIMING_CFG0_1
Address: 0x000 0421
BANK2 Address: 0x21

RW	7	6	5	4	3	2	1	0
	CK_MASK1_START_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK1_START_1	CK_MASK1 start position This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.24 TG_TIMING_CFG0_2
Address: 0x000 0422
BANK2 Address: 0x22

RW	7	6	5	4	3	2	1	0
	CK_MASK1_END_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK1_END_0	CK_MASK1 end position This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.25 TG_TIMING_CFG0_3
Address: 0x000 0423
BANK2 Address: 0x23

RW	7	6	5	4	3	2	1	0
	CK_MASK1_END_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK1_END_1	CK_MASK1 end position This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.26 TG_TIMING_CFG1_0
Address: 0x000 0424
BANK2 Address: 0x24

RW	7	6	5	4	3	2	1	0
	CK_MASK2_START_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK2_START_0	CK_MASK2 start position This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.27 TG_TIMING_CFG1_1
Address: 0x000 0425
BANK2 Address: 0x25

RW	7	6	5	4	3	2	1	0
	CK_MASK2_START_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK2_START_1	CK_MASK2 start position This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.28 TG_TIMING_CFG1_2
Address: 0x000 0426
BANK2 Address: 0x26

RW	7	6	5	4	3	2	1	0
	CK_MASK2_END_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK2_END_0	CK_MASK2 end position This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.29 TG_TIMING_CFG1_3
Address: 0x000 0427
BANK2 Address: 0x27

RW	7	6	5	4	3	2	1	0
	CK_MASK2_END_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_MASK2_END_1	CK_MASK2 end position This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.30 TG_TIMING_CFG3_0
Address: 0x000 042C
BANK2 Address: 0x2C

RW	7	6	5	4	3	2	1	0
	CLAMP_START_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CLAMP_START_0	Clamp start position This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.31 TG_TIMING_CFG3_1
Address: 0x000 042D
BANK2 Address: 0x2D

RW	7	6	5	4	3	2	1	0
	CLAMP_START_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CLAMP_START_1	Clamp start position This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.32 TG_TIMING_CFG3_2
Address: 0x000 042E
BANK2 Address: 0x2E

RW	7	6	5	4	3	2	1	0
	CLAMP_END_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CLAMP_END_0	Clamp end position This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.33 TG_TIMING_CFG3_3
Address: 0x000 042F
BANK2 Address: 0x2F

RW	7	6	5	4	3	2	1	0
	CLAMP_END_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CLAMP_END_1	Clamp end position This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.34 TG_TIMING_CFG5_0
Address: 0x000 0434
BANK2 Address: 0x34

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL1_0							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL1_0	Pixel count for FLAG_PIX1 – 1st flag This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.35 TG_TIMING_CFG5_1
Address: 0x000 0435
BANK2 Address: 0x35

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL1_1							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL1_1	Pixel count for FLAG_PIX1 – 1st flag This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.36 TG_TIMING_CFG5_2
Address: 0x000 0436
BANK2 Address: 0x36

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL2_0							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL2_0	Pixel count for FLAG_PIX1 – 2nd flag This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.37 TG_TIMING_CFG5_3
Address: 0x000 0437
BANK2 Address: 0x37

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL2_1							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL2_1	Pixel count for FLAG_PIX1 – 2nd flag This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.38 TG_TIMING_CFG6_0
Address: 0x000 0438
BANK2 Address: 0x38

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL3_0							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL3_0	Pixel count for FLAG_PIX1 – 3rd flag This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.39 TG_TIMING_CFG6_1
Address: 0x000 0439
BANK2 Address: 0x39

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL3_1							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL3_1	Pixel count for FLAG_PIX1 – 3rd flag This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.40 TG_TIMING_CFG6_2
Address: 0x000 043A
BANK2 Address: 0x3A

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL4_0							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL4_0	Pixel count for FLAG_PIX1 – 4th flag This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.41 TG_TIMING_CFG6_3
Address: 0x000 043B
BANK2 Address: 0x3B

RW	7	6	5	4	3	2	1	0
	FLAG_PIX1_PIXEL4_1							
Default	1	1	1	1	1	1	1	1

Bits	Name	Description
7:0	FLAG_PIX1_PIXEL4_1	Pixel count for FLAG_PIX1 – 4th flag This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.42 TG_TIMING_CFG7_0
Address: 0x000 043C
BANK2 Address: 0x3C

RW	7	6	5	4	3	2	1	0
	—	ACYC_PO_POL	ACYC_PO_SEL				ACYC_MODE	ACYC_EN
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	—	Reserved
6	ACYC_PO_POL	Auto-cycle timing reference polarity. Selects which edge of the selected PO source is used to trigger the gain/offset update. 0 = (Default) Rise 1 = Fall
5:2	ACYC_PO_SEL	Auto Cycle (ACYC) pulse signal selection from PO0 to PO10 0x0 = (Default) Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
1	ACYC_MODE	Auto-cycle timing reference selection 0 = (Default) pga_dly 1 = PO signal
0	ACYC_EN	Enables auto-cycle of gain/offset configuration 0 = (Default) Disabled 1 = Enabled

8.5.43 TG_TIMING_CFG7_1
Address: 0x000 043D
BANK2 Address: 0x3D

RW	7	6	5	4	3	2	1	0
	ACYC_DELAY							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	ACYC_DELAY	Gain/offset delay from sequence-state transition. Valid in auto-cycle mode (ACYC_EN=1). Note this field should be set to 0x00 if BLC is enabled. 0x00 = (Default) 1 clocks 0x01 = 2 clocks ... 0xFF = 256 clocks

8.5.44 TG_TIMING_CFG7_2
Address: 0x000 043E
BANK2 Address: 0x3E

RW	7	6	5	4	3	2	1	0
	BLC_START_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	BLC_START_0	Start pixel for black level calibration (BLC) This should be lower than the sequence-state period Bits[7:0] of a 16-bit field.

8.5.45 TG_TIMING_CFG7_3
Address: 0x000 043F
BANK2 Address: 0x3F

RW	7	6	5	4	3	2	1	0
	BLC_START_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	BLC_START_1	Start pixel for black level calibration (BLC) This should be lower than the sequence-state period Bits[15:8] of a 16-bit field.

8.5.46 TG_TIMING_CFG8_0
Address: 0x000 0440
BANK2 Address: 0x40

RW	7	6	5	4	3	2	1	0
	PO7_INIT_LVL	PO6_INIT_LVL	PO5_INIT_LVL	PO4_INIT_LVL	PO3_INIT_LVL	PO2_INIT_LVL	PO1_INIT_LVL	PO0_INIT_LVL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	PO7_INIT_LVL	Initial PO7 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO7_TP_POL
6	PO6_INIT_LVL	Initial PO6 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO6_TP_POL
5	PO5_INIT_LVL	Initial PO5 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO5_TP_POL
4	PO4_INIT_LVL	Initial PO4 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO4_TP_POL
3	PO3_INIT_LVL	Initial PO3 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO3_TP_POL
2	PO2_INIT_LVL	Initial PO2 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO2_TP_POL
1	PO1_INIT_LVL	Initial PO1 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO1_TP_POL
0	PO0_INIT_LVL	Initial PO0 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO0_TP_POL

8.5.47 TG_TIMING_CFG8_1
Address: 0x000 0441
BANK2 Address: 0x41

RW	7	6	5	4	3	2	1	0
		—		CK_TOG2_INIT_LVL	CK_TOG1_INIT_LVL	PO10_INIT_LVL	PO9_INIT_LVL	PO8_INIT_LVL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4	CK_TOG2_INIT_LVL	Initial CK_TOG2 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of CK_TOG2_TP_POL
3	CK_TOG1_INIT_LVL	Initial CK_TOG1 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of CK_TOG1_TP_POL
2	PO10_INIT_LVL	Initial PO10 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO10_TP_POL
1	PO9_INIT_LVL	Initial PO9 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO9_TP_POL
0	PO8_INIT_LVL	Initial PO8 level when the pixel counter is zero 0 = (Default) Initial level is unchanged from previous cycle 1 = Initial level is 1st toggle bit of PO8_TP_POL

8.5.48 TG_TIMING_CFG8_2
Address: 0x000 0442
BANK2 Address: 0x42

RW	7	6	5	4	3	2	1	0
	FIFO_RESET_DLY	PO10_DC_INIT_LVL	PO9_DC_INIT_LVL	PO8_DC_INIT_LVL	PO7_DC_INIT_LVL	PO6_DC_INIT_LVL	PO5_DC_INIT_LVL	PGEN_CNT_SEL
Default	1	0	0	0	0	0	0	1

Bits	Name	Description
7	FIFO_RESET_DLY	Enables a delay between the sequence-state transition and the FIFO reset. Only valid if FIFO_RESET_CTRL=1. 0 = No delay 1 = (Default) Delay 7 pixels
6	PO10_DC_INIT_LVL	Initial PO10 level when the pixel counter is zero. Valid if direct control is selected for PO10. 0 = (Default) 0 1 = 1
5	PO9_DC_INIT_LVL	Initial PO9 level when the pixel counter is zero. Valid if direct control is selected for PO9. 0 = (Default) 0 1 = 1
4	PO8_DC_INIT_LVL	Initial PO8 level when the pixel counter is zero. Valid if direct control is selected for PO8. 0 = (Default) 0 1 = 1
3	PO7_DC_INIT_LVL	Initial PO7 level when the pixel counter is zero. Valid if direct control is selected for PO7. 0 = (Default) 0 1 = 1
2	PO6_DC_INIT_LVL	Initial PO6 level when the pixel counter is zero. Valid if direct control is selected for PO6. 0 = (Default) 0 1 = 1
1	PO5_DC_INIT_LVL	Initial PO5 level when the pixel counter is zero. Valid if direct control is selected for PO5. 0 = (Default) 0 1 = 1
0	PGEN_CNT_SEL	Selects primary or secondary pixel counter to indicate new scan line. 0 = Primary counter (new line at initial sequence state) 1 = (Default) Secondary counter (new line on each sequence state)

8.5.49 TG_TIMING_CFG8_3
Address: 0x000 0443
BANK2 Address: 0x43

RW	7	6	5	4	3	2	1	0
	FIFO_BLANK_DUR						—	FIFO_RESET_CTRL
Default	1	1	0	0	1	0	0	0

Bits	Name	Description
7:3	FIFO_BLANK_DUR	Configures the blanking duration when flushing the FIFO. Only valid if FIFO_RESET_CTRL=1. 0x00 = 0 pixels 0x01 = 2 pixels ... 0x1F = 62 pixels
2:1	—	Reserved
0	FIFO_RESET_CTRL	Flushes and resets the FIFO at the start of each scan line. This option should be enabled if spread-spectrum modulation is enabled. 0 = (Default) Disabled 1 = Enabled

8.5.50 TG_POLARITY_T1_0
Address: 0x000 0444
BANK2 Address: 0x44

RW	7	6	5	4	3	2	1	0
	CK_TOG1_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG1_TP_POL_0	Toggle Polarity for CK_TOG1; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.51 TG_POLARITY_T1_1
Address: 0x000 0445
BANK2 Address: 0x45

RW	7	6	5	4	3	2	1	0
	CK_TOG1_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG1_TP_POL_1	Toggle Polarity for CK_TOG1; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.52 TG_POLARITY_T1_2
Address: 0x000 0446
BANK2 Address: 0x46

RW	7	6	5	4	3	2	1	0
	CK_TOG1_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG1_TP_POL_2	Toggle Polarity for CK_TOG1; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.53 TG_POLARITY_T1_3
Address: 0x000 0447
BANK2 Address: 0x47

RW	7	6	5	4	3	2	1	0
	CK_TOG1_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG1_TP_POL_3	Toggle Polarity for CK_TOG1; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.54 TG_POLARITY_T2_0
Address: 0x000 0448
BANK2 Address: 0x48

RW	7	6	5	4	3	2	1	0
	CK_TOG2_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG2_TP_POL_0	Toggle Polarity for CK_TOG2; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.55 TG_POLARITY_T2_1
Address: 0x000 0449
BANK2 Address: 0x49

RW	7	6	5	4	3	2	1	0
	CK_TOG2_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG2_TP_POL_1	Toggle Polarity for CK_TOG2; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.56 TG_POLARITY_T2_2
Address: 0x000 044A
BANK2 Address: 0x4A

RW	7	6	5	4	3	2	1	0
	CK_TOG2_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG2_TP_POL_2	Toggle Polarity for CK_TOG2; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.57 TG_POLARITY_T2_3
Address: 0x000 044B
BANK2 Address: 0x4B

RW	7	6	5	4	3	2	1	0
	CK_TOG2_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CK_TOG2_TP_POL_3	Toggle Polarity for CK_TOG2; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.58 TG_POLARITY_PO0_0
Address: 0x000 0450
BANK2 Address: 0x50

RW	7	6	5	4	3	2	1	0
	PO0_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO0_TP_POL_0	Toggle Polarity for Pulse Out PO0; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.59 TG_POLARITY_PO0_1
Address: 0x000 0451
BANK2 Address: 0x51

RW	7	6	5	4	3	2	1	0
	PO0_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO0_TP_POL_1	Toggle Polarity for Pulse Out PO0; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.60 TG_POLARITY_PO0_2
Address: 0x000 0452
BANK2 Address: 0x52

RW	7	6	5	4	3	2	1	0
	PO0_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO0_TP_POL_2	Toggle Polarity for Pulse Out PO0; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.61 TG_POLARITY_PO0_3
Address: 0x000 0453
BANK2 Address: 0x53

RW	7	6	5	4	3	2	1	0
	PO0_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO0_TP_POL_3	Toggle Polarity for Pulse Out PO0; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.62 TG_POLARITY_PO1_0
Address: 0x000 0454
BANK2 Address: 0x54

RW	7	6	5	4	3	2	1	0
	PO1_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO1_TP_POL_0	Toggle Polarity for Pulse Out PO1; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.63 TG_POLARITY_PO1_1
Address: 0x000 0455
BANK2 Address: 0x55

RW	7	6	5	4	3	2	1	0
	PO1_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO1_TP_POL_1	Toggle Polarity for Pulse Out PO1; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.64 TG_POLARITY_PO1_2
Address: 0x000 0456
BANK2 Address: 0x56

RW	7	6	5	4	3	2	1	0
	PO1_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO1_TP_POL_2	Toggle Polarity for Pulse Out PO1; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.65 TG_POLARITY_PO1_3
Address: 0x000 0457
BANK2 Address: 0x57

RW	7	6	5	4	3	2	1	0
	PO1_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO1_TP_POL_3	Toggle Polarity for Pulse Out PO1; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.66 TG_POLARITY_PO2_0
Address: 0x000 0458
BANK2 Address: 0x58

RW	7	6	5	4	3	2	1	0
	PO2_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO2_TP_POL_0	Toggle Polarity for Pulse Out PO2; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.67 TG_POLARITY_PO2_1
Address: 0x000 0459
BANK2 Address: 0x59

RW	7	6	5	4	3	2	1	0
	PO2_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO2_TP_POL_1	Toggle Polarity for Pulse Out PO2; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.68 TG_POLARITY_PO2_2
Address: 0x000 045A
BANK2 Address: 0x5A

RW	7	6	5	4	3	2	1	0
	PO2_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO2_TP_POL_2	Toggle Polarity for Pulse Out PO2; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.69 TG_POLARITY_PO2_3
Address: 0x000 045B
BANK2 Address: 0x5B

RW	7	6	5	4	3	2	1	0
	PO2_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO2_TP_POL_3	Toggle Polarity for Pulse Out PO2; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.70 TG_POLARITY_PO3_0
Address: 0x000 045C
BANK2 Address: 0x5C

RW	7	6	5	4	3	2	1	0
	PO3_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO3_TP_POL_0	Toggle Polarity for Pulse Out PO3; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.71 TG_POLARITY_PO3_1
Address: 0x000 045D
BANK2 Address: 0x5D

RW	7	6	5	4	3	2	1	0
	PO3_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO3_TP_POL_1	Toggle Polarity for Pulse Out PO3; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.72 TG_POLARITY_PO3_2
Address: 0x000 045E
BANK2 Address: 0x5E

RW	7	6	5	4	3	2	1	0
	PO3_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO3_TP_POL_2	Toggle Polarity for Pulse Out PO3; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.73 TG_POLARITY_PO3_3
Address: 0x000 045F
BANK2 Address: 0x5F

RW	7	6	5	4	3	2	1	0
	PO3_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO3_TP_POL_3	Toggle Polarity for Pulse Out PO3; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.74 TG_POLARITY_PO4_0
Address: 0x000 0460
BANK2 Address: 0x60

RW	7	6	5	4	3	2	1	0
	PO4_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO4_TP_POL_0	Toggle Polarity for Pulse Out PO4; Bits[7:0] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.75 TG_POLARITY_PO4_1
Address: 0x000 0461
BANK2 Address: 0x61

RW	7	6	5	4	3	2	1	0
	PO4_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO4_TP_POL_1	Toggle Polarity for Pulse Out PO4; Bits[15:8] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.76 TG_POLARITY_PO4_2
Address: 0x000 0462
BANK2 Address: 0x62

RW	7	6	5	4	3	2	1	0
	PO4_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO4_TP_POL_2	Toggle Polarity for Pulse Out PO4; Bits[23:16] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.77 TG_POLARITY_PO4_3
Address: 0x000 0463
BANK2 Address: 0x63

RW	7	6	5	4	3	2	1	0
	PO4_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO4_TP_POL_3	Toggle Polarity for Pulse Out PO4; Bits[31:24] of a 32-bit field. Each bit represents either 0 or 1 at the corresponding toggle point

8.5.78 TG_POLARITY_PO5_0
Address: 0x000 0464
BANK2 Address: 0x64

RW	7	6	5	4	3	2	1	0
	PO5_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO5_TP_POL_0	Toggle Polarity for Pulse Out PO5; Bits[7:0] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO5 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the rising-edge pixel.

8.5.79 TG_POLARITY_PO5_1
Address: 0x000 0465
BANK2 Address: 0x65

RW	7	6	5	4	3	2	1	0
	PO5_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO5_TP_POL_1	Toggle Polarity for Pulse Out PO5; Bits[15:8] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO5 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the rising-edge pixel.

8.5.80 TG_POLARITY_PO5_2
Address: 0x000 0466
BANK2 Address: 0x66

RW	7	6	5	4	3	2	1	0
	PO5_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO5_TP_POL_2	Toggle Polarity for Pulse Out PO5; Bits[23:16] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO5 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the falling-edge pixel.

8.5.81 TG_POLARITY_PO5_3
Address: 0x000 0467
BANK2 Address: 0x67

RW	7	6	5	4	3	2	1	0
	PO5_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO5_TP_POL_3	Toggle Polarity for Pulse Out PO5; Bits[31:24] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO5 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the falling-edge pixel.

8.5.82 TG_POLARITY_PO6_0
Address: 0x000 0468
BANK2 Address: 0x68

RW	7	6	5	4	3	2	1	0
	PO6_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO6_TP_POL_0	Toggle Polarity for Pulse Out PO6; Bits[7:0] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO6 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the rising-edge pixel.

8.5.83 TG_POLARITY_PO6_1
Address: 0x000 0469
BANK2 Address: 0x69

RW	7	6	5	4	3	2	1	0
	PO6_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO6_TP_POL_1	Toggle Polarity for Pulse Out PO6; Bits[15:8] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO6 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the rising-edge pixel.

8.5.84 TG_POLARITY_PO6_2
Address: 0x000 046A
BANK2 Address: 0x6A

RW	7	6	5	4	3	2	1	0
	PO6_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO6_TP_POL_2	Toggle Polarity for Pulse Out PO6; Bits[23:16] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO6 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the falling-edge pixel.

8.5.85 TG_POLARITY_PO6_3
Address: 0x000 046B
BANK2 Address: 0x6B

RW	7	6	5	4	3	2	1	0
	PO6_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO6_TP_POL_3	Toggle Polarity for Pulse Out PO6; Bits[31:24] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO6 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the falling-edge pixel.

8.5.86 TG_POLARITY_PO7_0
Address: 0x000 046C
BANK2 Address: 0x6C

RW	7	6	5	4	3	2	1	0
	PO7_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO7_TP_POL_0	Toggle Polarity for Pulse Out PO7; Bits[7:0] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO7 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the rising-edge pixel.

8.5.87 TG_POLARITY_PO7_1
Address: 0x000 046D
BANK2 Address: 0x6D

RW	7	6	5	4	3	2	1	0
	PO7_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO7_TP_POL_1	Toggle Polarity for Pulse Out PO7; Bits[15:8] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO7 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the rising-edge pixel.

8.5.88 TG_POLARITY_PO7_2
Address: 0x000 046E
BANK2 Address: 0x6E

RW	7	6	5	4	3	2	1	0
	PO7_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO7_TP_POL_2	Toggle Polarity for Pulse Out PO7; Bits[23:16] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO7 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the falling-edge pixel.

8.5.89 TG_POLARITY_PO7_3
Address: 0x000 046F
BANK2 Address: 0x6F

RW	7	6	5	4	3	2	1	0
	PO7_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO7_TP_POL_3	Toggle Polarity for Pulse Out PO7; Bits[31:24] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO7 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the falling-edge pixel.

8.5.90 TG_POLARITY_PO8_0
Address: 0x000 0470
BANK2 Address: 0x70

RW	7	6	5	4	3	2	1	0
	PO8_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO8_TP_POL_0	Toggle Polarity for Pulse Out PO8; Bits[7:0] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO8 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the rising-edge pixel.

8.5.91 TG_POLARITY_PO8_1
Address: 0x000 0471
BANK2 Address: 0x71

RW	7	6	5	4	3	2	1	0
	PO8_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO8_TP_POL_1	Toggle Polarity for Pulse Out PO8; Bits[15:8] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO8 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the rising-edge pixel.

8.5.92 TG_POLARITY_PO8_2
Address: 0x000 0472
BANK2 Address: 0x72

RW	7	6	5	4	3	2	1	0
	PO8_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO8_TP_POL_2	Toggle Polarity for Pulse Out PO8; Bits[23:16] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO8 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the falling-edge pixel.

8.5.93 TG_POLARITY_PO8_3
Address: 0x000 0473
BANK2 Address: 0x73

RW	7	6	5	4	3	2	1	0
	PO8_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO8_TP_POL_3	Toggle Polarity for Pulse Out PO8; Bits[31:24] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO8 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the falling-edge pixel.

8.5.94 TG_POLARITY_PO9_0
Address: 0x000 0474
BANK2 Address: 0x74

RW	7	6	5	4	3	2	1	0
	PO9_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO9_TP_POL_0	Toggle Polarity for Pulse Out PO9; Bits[7:0] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO9 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the rising-edge pixel.

8.5.95 TG_POLARITY_PO9_1
Address: 0x000 0475
BANK2 Address: 0x75

RW	7	6	5	4	3	2	1	0
	PO9_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO9_TP_POL_1	Toggle Polarity for Pulse Out PO9; Bits[15:8] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO9 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the rising-edge pixel.

8.5.96 TG_POLARITY_PO9_2
Address: 0x000 0476
BANK2 Address: 0x76

RW	7	6	5	4	3	2	1	0
	PO9_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO9_TP_POL_2	Toggle Polarity for Pulse Out PO9; Bits[23:16] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO9 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the falling-edge pixel.

8.5.97 TG_POLARITY_PO9_3
Address: 0x000 0477
BANK2 Address: 0x77

RW	7	6	5	4	3	2	1	0
	PO9_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO9_TP_POL_3	Toggle Polarity for Pulse Out PO9; Bits[31:24] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO9 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the falling-edge pixel.

8.5.98 TG_POLARITY_PO10_0
Address: 0x000 0478
BANK2 Address: 0x78

RW	7	6	5	4	3	2	1	0
	PO10_TP_POL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO10_TP_POL_0	Toggle Polarity for Pulse Out PO10; Bits[7:0] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO10 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the rising-edge pixel.

8.5.99 TG_POLARITY_PO10_1
Address: 0x000 0479
BANK2 Address: 0x79

RW	7	6	5	4	3	2	1	0
	PO10_TP_POL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO10_TP_POL_1	Toggle Polarity for Pulse Out PO10; Bits[15:8] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO10 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the rising-edge pixel.

8.5.100 TG_POLARITY_PO10_2
Address: 0x000 047A
BANK2 Address: 0x7A

RW	7	6	5	4	3	2	1	0
	PO10_TP_POL_2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO10_TP_POL_2	Toggle Polarity for Pulse Out PO10; Bits[23:16] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO10 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[7:0] of the falling-edge pixel.

8.5.101 TG_POLARITY_PO10_3
Address: 0x000 047B
BANK2 Address: 0x7B

RW	7	6	5	4	3	2	1	0
	PO10_TP_POL_3							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PO10_TP_POL_3	Toggle Polarity for Pulse Out PO10; Bits[31:24] of a 32-bit field; each bit represents either 0 or 1 at the corresponding toggle point. If PO10 is configured for direct control, this field configures the rising and falling edges of the pulse; this byte is Bits[15:8] of the falling-edge pixel.

8.5.102 TG_REFCNT_SEL_0
Address: 0x000 047C
BANK2 Address: 0x7C

RW	7	6	5	4	3	2	1	0
			—			CLAMP_CNT_SEL	BLC_CNT_SEL	FLAG_PIX1_CNT_SEL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:3	—	Reserved
2	CLAMP_CNT_SEL	CLAMP reference counter select 0 = (Default) Primary 1 = Secondary
1	BLC_CNT_SEL	BLC reference counter select 0 = (Default) Primary 1 = Secondary
0	FLAG_PIX1_CNT_SEL	FLAG_PIX1 reference counter select 0 = (Default) Primary 1 = Secondary

8.5.103 TG_REFCNT_SEL_1
Address: 0x000 047D
BANK2 Address: 0x7D

RW	7	6	5	4	3	2	1	0
		—		CK_TOG2_CNT_SEL	CK_TOG1_CNT_SEL	—	CK_MASK2_CNT_SEL	CK_MASK1_CNT_SEL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4	CK_TOG2_CNT_SEL	CK_TOG2 reference counter select 0 = (Default) Primary 1 = Secondary
3	CK_TOG1_CNT_SEL	CK_TOG1 reference counter select 0 = (Default) Primary 1 = Secondary
2	—	Reserved

Bits	Name	Description
1	CK_MASK2_CNT_SEL	CK_MASK2 reference counter select 0 = (Default) Primary 1 = Secondary
0	CK_MASK1_CNT_SEL	CK_MASK1 reference counter select 0 = (Default) Primary 1 = Secondary

8.5.104 TG_REFCNT_SEL_2
Address: 0x000 047E
BANK2 Address: 0x7E

RW	7	6	5	4	3	2	1	0
	PO7_CNT_SEL	PO6_CNT_SEL	PO5_CNT_SEL	PO4_CNT_SEL	PO3_CNT_SEL	PO2_CNT_SEL	PO1_CNT_SEL	PO0_CNT_SEL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	PO7_CNT_SEL	Pulse Output PO7 reference counter select 0 = (Default) Primary 1 = Secondary
6	PO6_CNT_SEL	Pulse Output PO6 reference counter select 0 = (Default) Primary 1 = Secondary
5	PO5_CNT_SEL	Pulse Output PO5 reference counter select 0 = (Default) Primary 1 = Secondary
4	PO4_CNT_SEL	Pulse Output PO4 reference counter select 0 = (Default) Primary 1 = Secondary
3	PO3_CNT_SEL	Pulse Output PO3 reference counter select 0 = (Default) Primary 1 = Secondary
2	PO2_CNT_SEL	Pulse Output PO2 reference counter select 0 = (Default) Primary 1 = Secondary
1	PO1_CNT_SEL	Pulse Output PO1 reference counter select 0 = (Default) Primary 1 = Secondary
0	PO0_CNT_SEL	Pulse Output PO0 reference counter select 0 = (Default) Primary 1 = Secondary

8.5.105 TG_REFCNT_SEL_3
Address: 0x000 047F
BANK2 Address: 0x7F

RW	7	6	5	4	3	2	1	0
			—			PO10_CNT_SEL	PO9_CNT_SEL	PO8_CNT_SEL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:3	—	Reserved
2	PO10_CNT_SEL	Pulse Output PO10 reference counter select 0 = (Default) Primary 1 = Secondary
1	PO9_CNT_SEL	Pulse Output PO9 reference counter select 0 = (Default) Primary 1 = Secondary
0	PO8_CNT_SEL	Pulse Output PO8 reference counter select 0 = (Default) Primary 1 = Secondary

8.5.106 TG_CYCPAT_CFG0_0
Address: 0x000 048C
BANK3 Address: 0x0C

RW	7	6	5	4	3	2	1	0
	BLC_SEQ_SEL				FLAG_PIX1_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	BLC_SEQ_SEL	BLC sequence state select. Valid if BLC first pixel is referenced to the secondary pixel counter (BLC_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	FLAG_PIX1_SEQ_SEL	FLAG_PIX1 sequence state select. Valid if flag pixel is referenced to the secondary pixel counter (FLAG_PIX1_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.107 TG_CYCPAT_CFG0_1
Address: 0x000 048D
BANK3 Address: 0x0D

RW	7	6	5	4	3	2	1	0
	—				CLAMP_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CLAMP_SEQ_SEL	CLAMP sequence state select. Valid if clamp range is referenced to the secondary pixel counter (CLAMP_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.108 TG_CYCPAT_CFG0_2
Address: 0x000 048E
BANK3 Address: 0x0E

RW	7	6	5	4	3	2	1	0
	CK_MASK2_SEQ_SEL				CK_MASK1_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	CK_MASK2_SEQ_SEL	CK_MASK2 sequence state select. Valid if CK_MASK2 is referenced to the secondary pixel counter (CK_MASK2_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	CK_MASK1_SEQ_SEL	CK_MASK1 sequence state select. Valid if CK_MASK1 is referenced to the secondary pixel counter (CK_MASK1_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.109 TG_CYCPAT_CFG1_0
Address: 0x000 0490
BANK3 Address: 0x10

RW	7	6	5	4	3	2	1	0
	CK_TOG2_SEQ_SEL				CK_TOG1_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	CK_TOG2_SEQ_SEL	CK_TOG2 sequence state select. Valid if CK_TOG2 is referenced to the secondary pixel counter (CK_TOG2_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	CK_TOG1_SEQ_SEL	CK_TOG1 sequence state select. Valid if CK_TOG1 is referenced to the secondary pixel counter (CK_TOG1_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.110 TG_CYCPAT_CFG1_1
Address: 0x000 0491
BANK3 Address: 0x11

RW	7	6	5	4	3	2	1	0
	PO0_SEQ_SEL				—			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PO0_SEQ_SEL	Pulse Output PO0 sequence state select. Valid if PO0 is referenced to the secondary pixel counter (PO0_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	—	Reserved

8.5.111 TG_CYCPAT_CFG1_2
Address: 0x000 0492
BANK3 Address: 0x12

RW	7	6	5	4	3	2	1	0
	PO2_SEQ_SEL				PO1_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PO2_SEQ_SEL	Pulse Output PO2 sequence state select. Valid if PO2 is referenced to the secondary pixel counter (PO2_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	PO1_SEQ_SEL	Pulse Output PO1 sequence state select. Valid if PO1 is referenced to the secondary pixel counter (PO1_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.112 TG_CYCPAT_CFG1_3
Address: 0x000 0493
BANK3 Address: 0x13

RW	7	6	5	4	3	2	1	0
					PO3_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	PO3_SEQ_SEL	Pulse Output PO3 sequence state select. Valid if PO3 is referenced to the secondary pixel counter (PO3_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.113 TG_CYCPAT_CFG2_0
Address: 0x000 0494
BANK3 Address: 0x14

RW	7	6	5	4	3	2	1	0
	PO5_SEQ_SEL				PO4_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PO5_SEQ_SEL	Pulse Output PO5 sequence state select. Valid if PO5 is referenced to the secondary pixel counter (PO5_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	PO4_SEQ_SEL	Pulse Output PO4 sequence state select. Valid if PO4 is referenced to the secondary pixel counter (PO4_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.114 TG_CYCPAT_CFG2_1
Address: 0x000 0495
BANK3 Address: 0x15

RW	7	6	5	4	3	2	1	0
	PO7_SEQ_SEL				PO6_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PO7_SEQ_SEL	Pulse Output PO7 sequence state select. Valid if PO7 is referenced to the secondary pixel counter (PO7_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	PO6_SEQ_SEL	Pulse Output PO6 sequence state select. Valid if PO6 is referenced to the secondary pixel counter (PO6_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.115 TG_CYCPAT_CFG2_2
Address: 0x000 0496
BANK3 Address: 0x16

RW	7	6	5	4	3	2	1	0
	PO9_SEQ_SEL				PO8_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PO9_SEQ_SEL	Pulse Output PO9 sequence state select. Valid if PO9 is referenced to the secondary pixel counter (PO9_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3
3:0	PO8_SEQ_SEL	Pulse Output PO8 sequence state select. Valid if PO8 is referenced to the secondary pixel counter (PO8_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.116 TG_CYCPAT_CFG2_3
Address: 0x000 0497
BANK3 Address: 0x17

RW	7	6	5	4	3	2	1	0
	—				PO10_SEQ_SEL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	PO10_SEQ_SEL	Pulse Output PO10 sequence state select. Valid if PO10 is referenced to the secondary pixel counter (PO10_CNT_SEL=1). Bit [0] – enable in State 0 Bit [1] – enable in State 1 Bit [2] – enable in State 2 Bit [3] – enable in State 3

8.5.117 TG_TOGGLE_POINT0_0
Address: 0x000 0498
BANK3 Address: 0x18

RW	7	6	5	4	3	2	1	0
	TP0_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP0_PIXEL_0	TP0 toggle point. Defines the pixel-counter value for TP0. Bits[7:0] of a 16-bit field.

8.5.118 TG_TOGGLE_POINT0_1
Address: 0x000 0499
BANK3 Address: 0x19

RW	7	6	5	4	3	2	1	0
	TP0_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP0_PIXEL_1	TP0 toggle point. Defines the pixel-counter value for TP0. Bits[15:8] of a 16-bit field.

8.5.119 TG_TOGGLE_POINT0_2
Address: 0x000 049A
BANK3 Address: 0x1A

RW	7	6	5	4	3	2	1	0
	TP1_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP1_PIXEL_0	TP1 toggle point. Defines the pixel-counter value for TP1. Bits[7:0] of a 16-bit field.

8.5.120 TG_TOGGLE_POINT0_3
Address: 0x000 049B
BANK3 Address: 0x1B

RW	7	6	5	4	3	2	1	0
	TP1_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP1_PIXEL_1	TP1 toggle point. Defines the pixel-counter value for TP1. Bits[15:8] of a 16-bit field.

8.5.121 TG_TOGGLE_POINT1_0
Address: 0x000 049C
BANK3 Address: 0x1C

RW	7	6	5	4	3	2	1	0
	TP2_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP2_PIXEL_0	TP2 toggle point. Defines the pixel-counter value for TP2. Bits[7:0] of a 16-bit field.

8.5.122 TG_TOGGLE_POINT1_1
Address: 0x000 049D
BANK3 Address: 0x1D

RW	7	6	5	4	3	2	1	0
	TP2_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP2_PIXEL_1	TP2 toggle point. Defines the pixel-counter value for TP2. Bits[15:8] of a 16-bit field.

8.5.123 TG_TOGGLE_POINT1_2
Address: 0x000 049E
BANK3 Address: 0x1E

RW	7	6	5	4	3	2	1	0
	TP3_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP3_PIXEL_0	TP3 toggle point. Defines the pixel-counter value for TP3. Bits[7:0] of a 16-bit field.

8.5.124 TG_TOGGLE_POINT1_3
Address: 0x000 049F
BANK3 Address: 0x1F

RW	7	6	5	4	3	2	1	0
	TP3_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP3_PIXEL_1	TP3 toggle point. Defines the pixel-counter value for TP3. Bits[15:8] of a 16-bit field.

8.5.125 TG_TOGGLE_POINT2_0
Address: 0x000 04A0
BANK3 Address: 0x20

RW	7	6	5	4	3	2	1	0
	TP4_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP4_PIXEL_0	TP4 toggle point. Defines the pixel-counter value for TP4. Bits[7:0] of a 16-bit field.

8.5.126 TG_TOGGLE_POINT2_1
Address: 0x000 04A1
BANK3 Address: 0x21

RW	7	6	5	4	3	2	1	0
	TP4_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP4_PIXEL_1	TP4 toggle point. Defines the pixel-counter value for TP4. Bits[15:8] of a 16-bit field.

8.5.127 TG_TOGGLE_POINT2_2
Address: 0x000 04A2
BANK3 Address: 0x22

RW	7	6	5	4	3	2	1	0
	TP5_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP5_PIXEL_0	TP5 toggle point. Defines the pixel-counter value for TP5. Bits[7:0] of a 16-bit field.

8.5.128 TG_TOGGLE_POINT2_3
Address: 0x000 04A3
BANK3 Address: 0x23

RW	7	6	5	4	3	2	1	0
	TP5_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP5_PIXEL_1	TP5 toggle point. Defines the pixel-counter value for TP5. Bits[15:8] of a 16-bit field.

8.5.129 TG_TOGGLE_POINT3_0
Address: 0x000 04A4
BANK3 Address: 0x24

RW	7	6	5	4	3	2	1	0
	TP6_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP6_PIXEL_0	TP6 toggle point. Defines the pixel-counter value for TP6. Bits[7:0] of a 16-bit field.

8.5.130 TG_TOGGLE_POINT3_1
Address: 0x000 04A5
BANK3 Address: 0x25

RW	7	6	5	4	3	2	1	0
	TP6_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP6_PIXEL_1	TP6 toggle point. Defines the pixel-counter value for TP6. Bits[15:8] of a 16-bit field.

8.5.131 TG_TOGGLE_POINT3_2
Address: 0x000 04A6
BANK3 Address: 0x26

RW	7	6	5	4	3	2	1	0
	TP7_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP7_PIXEL_0	TP7 toggle point. Defines the pixel-counter value for TP7. Bits[7:0] of a 16-bit field.

8.5.132 TG_TOGGLE_POINT3_3
Address: 0x000 04A7
BANK3 Address: 0x27

RW	7	6	5	4	3	2	1	0
	TP7_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP7_PIXEL_1	TP7 toggle point. Defines the pixel-counter value for TP7. Bits[15:8] of a 16-bit field.

8.5.133 TG_TOGGLE_POINT4_0
Address: 0x000 04A8
BANK3 Address: 0x28

RW	7	6	5	4	3	2	1	0
	TP8_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP8_PIXEL_0	TP8 toggle point. Defines the pixel-counter value for TP8. Bits[7:0] of a 16-bit field.

8.5.134 TG_TOGGLE_POINT4_1
Address: 0x000 04A9
BANK3 Address: 0x29

RW	7	6	5	4	3	2	1	0
	TP8_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP8_PIXEL_1	TP8 toggle point. Defines the pixel-counter value for TP8. Bits[15:8] of a 16-bit field.

8.5.135 TG_TOGGLE_POINT4_2
Address: 0x000 04AA
BANK3 Address: 0x2A

RW	7	6	5	4	3	2	1	0
	TP9_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP9_PIXEL_0	TP9 toggle point. Defines the pixel-counter value for TP9. Bits[7:0] of a 16-bit field.

8.5.136 TG_TOGGLE_POINT4_3
Address: 0x000 04AB
BANK3 Address: 0x2B

RW	7	6	5	4	3	2	1	0
	TP9_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP9_PIXEL_1	TP9 toggle point. Defines the pixel-counter value for TP9. Bits[15:8] of a 16-bit field.

8.5.137 TG_TOGGLE_POINT5_0
Address: 0x000 04AC
BANK3 Address: 0x2C

RW	7	6	5	4	3	2	1	0
	TP10_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP10_PIXEL_0	TP10 toggle point. Defines the pixel-counter value for TP10. Bits[7:0] of a 16-bit field.

8.5.138 TG_TOGGLE_POINT5_1
Address: 0x000 04AD
BANK3 Address: 0x2D

RW	7	6	5	4	3	2	1	0
	TP10_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP10_PIXEL_1	TP10 toggle point. Defines the pixel-counter value for TP10. Bits[15:8] of a 16-bit field.

8.5.139 TG_TOGGLE_POINT5_2
Address: 0x000 04AE
BANK3 Address: 0x2E

RW	7	6	5	4	3	2	1	0
	TP11_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP11_PIXEL_0	TP11 toggle point. Defines the pixel-counter value for TP11. Bits[7:0] of a 16-bit field.

8.5.140 TG_TOGGLE_POINT5_3
Address: 0x000 04AF
BANK3 Address: 0x2F

RW	7	6	5	4	3	2	1	0
	TP11_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP11_PIXEL_1	TP11 toggle point. Defines the pixel-counter value for TP11. Bits[15:8] of a 16-bit field.

8.5.141 TG_TOGGLE_POINT6_0
Address: 0x000 04B0
BANK3 Address: 0x30

RW	7	6	5	4	3	2	1	0
	TP12_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP12_PIXEL_0	TP12 toggle point. Defines the pixel-counter value for TP12. Bits[7:0] of a 16-bit field.

8.5.142 TG_TOGGLE_POINT6_1
Address: 0x000 04B1
BANK3 Address: 0x31

RW	7	6	5	4	3	2	1	0
	TP12_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP12_PIXEL_1	TP12 toggle point. Defines the pixel-counter value for TP12. Bits[15:8] of a 16-bit field.

8.5.143 TG_TOGGLE_POINT6_2
Address: 0x000 04B2
BANK3 Address: 0x32

RW	7	6	5	4	3	2	1	0
	TP13_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP13_PIXEL_0	TP13 toggle point. Defines the pixel-counter value for TP13. Bits[7:0] of a 16-bit field.

8.5.144 TG_TOGGLE_POINT6_3
Address: 0x000 04B3
BANK3 Address: 0x33

RW	7	6	5	4	3	2	1	0
	TP13_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP13_PIXEL_1	TP13 toggle point. Defines the pixel-counter value for TP13. Bits[15:8] of a 16-bit field.

8.5.145 TG_TOGGLE_POINT7_0
Address: 0x000 04B4
BANK3 Address: 0x34

RW	7	6	5	4	3	2	1	0
	TP14_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP14_PIXEL_0	TP14 toggle point. Defines the pixel-counter value for TP14. Bits[7:0] of a 16-bit field.

8.5.146 TG_TOGGLE_POINT7_1
Address: 0x000 04B5
BANK3 Address: 0x35

RW	7	6	5	4	3	2	1	0
	TP14_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP14_PIXEL_1	TP14 toggle point. Defines the pixel-counter value for TP14. Bits[15:8] of a 16-bit field.

8.5.147 TG_TOGGLE_POINT7_2
Address: 0x000 04B6
BANK3 Address: 0x36

RW	7	6	5	4	3	2	1	0
	TP15_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP15_PIXEL_0	TP15 toggle point. Defines the pixel-counter value for TP15. Bits[7:0] of a 16-bit field.

8.5.148 TG_TOGGLE_POINT7_3
Address: 0x000 04B7
BANK3 Address: 0x37

RW	7	6	5	4	3	2	1	0
	TP15_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP15_PIXEL_1	TP15 toggle point. Defines the pixel-counter value for TP15. Bits[15:8] of a 16-bit field.

8.5.149 TG_TOGGLE_POINT8_0
Address: 0x000 04B8
BANK3 Address: 0x38

RW	7	6	5	4	3	2	1	0
	TP16_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP16_PIXEL_0	TP16 toggle point. Defines the pixel-counter value for TP16. Bits[7:0] of a 16-bit field.

8.5.150 TG_TOGGLE_POINT8_1
Address: 0x000 04B9
BANK3 Address: 0x39

RW	7	6	5	4	3	2	1	0
	TP16_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP16_PIXEL_1	TP16 toggle point. Defines the pixel-counter value for TP16. Bits[15:8] of a 16-bit field.

8.5.151 TG_TOGGLE_POINT8_2
Address: 0x000 04BA
BANK3 Address: 0x3A

RW	7	6	5	4	3	2	1	0
	TP17_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP17_PIXEL_0	TP17 toggle point. Defines the pixel-counter value for TP17. Bits[7:0] of a 16-bit field.

8.5.152 TG_TOGGLE_POINT8_3
Address: 0x000 04BB
BANK3 Address: 0x3B

RW	7	6	5	4	3	2	1	0
	TP17_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP17_PIXEL_1	TP17 toggle point. Defines the pixel-counter value for TP17. Bits[15:8] of a 16-bit field.

8.5.153 TG_TOGGLE_POINT9_0
Address: 0x000 04BC
BANK3 Address: 0x3C

RW	7	6	5	4	3	2	1	0
	TP18_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP18_PIXEL_0	TP18 toggle point. Defines the pixel-counter value for TP18. Bits[7:0] of a 16-bit field.

8.5.154 TG_TOGGLE_POINT9_1
Address: 0x000 04BD
BANK3 Address: 0x3D

RW	7	6	5	4	3	2	1	0
	TP18_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP18_PIXEL_1	TP18 toggle point. Defines the pixel-counter value for TP18. Bits[15:8] of a 16-bit field.

8.5.155 TG_TOGGLE_POINT9_2
Address: 0x000 04BE
BANK3 Address: 0x3E

RW	7	6	5	4	3	2	1	0
	TP19_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP19_PIXEL_0	TP19 toggle point. Defines the pixel-counter value for TP19. Bits[7:0] of a 16-bit field.

8.5.156 TG_TOGGLE_POINT9_3
Address: 0x000 04BF
BANK3 Address: 0x3F

RW	7	6	5	4	3	2	1	0
	TP19_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP19_PIXEL_1	TP19 toggle point. Defines the pixel-counter value for TP19. Bits[15:8] of a 16-bit field.

8.5.157 TG_TOGGLE_POINT10_0
Address: 0x000 04C0
BANK3 Address: 0x40

RW	7	6	5	4	3	2	1	0
	TP20_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP20_PIXEL_0	TP20 toggle point. Defines the pixel-counter value for TP20. If PO5 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP20 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.158 TG_TOGGLE_POINT10_1
Address: 0x000 04C1
BANK3 Address: 0x41

RW	7	6	5	4	3	2	1	0
	TP20_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP20_PIXEL_1	TP20 toggle point. Defines the pixel-counter value for TP20. If PO5 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP20 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.159 TG_TOGGLE_POINT10_2
Address: 0x000 04C2
BANK3 Address: 0x42

RW	7	6	5	4	3	2	1	0
	TP21_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP21_PIXEL_0	TP21 toggle point. Defines the pixel-counter value for TP21. If PO5 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP21 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.160 TG_TOGGLE_POINT10_3
Address: 0x000 04C3
BANK3 Address: 0x43

RW	7	6	5	4	3	2	1	0
	TP21_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP21_PIXEL_1	TP21 toggle point. Defines the pixel-counter value for TP21. If PO5 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP21 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.161 TG_TOGGLE_POINT11_0
Address: 0x000 04C4
BANK3 Address: 0x44

RW	7	6	5	4	3	2	1	0
	TP22_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP22_PIXEL_0	TP22 toggle point. Defines the pixel-counter value for TP22. If PO6 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP22 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.162 TG_TOGGLE_POINT11_1
Address: 0x000 04C5
BANK3 Address: 0x45

RW	7	6	5	4	3	2	1	0
	TP22_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP22_PIXEL_1	TP22 toggle point. Defines the pixel-counter value for TP22. If PO6 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP22 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.163 TG_TOGGLE_POINT11_2
Address: 0x000 04C6
BANK3 Address: 0x46

RW	7	6	5	4	3	2	1	0
	TP23_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP23_PIXEL_0	TP23 toggle point. Defines the pixel-counter value for TP23. If PO6 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP23 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.164 TG_TOGGLE_POINT11_3
Address: 0x000 04C7
BANK3 Address: 0x47

RW	7	6	5	4	3	2	1	0
	TP23_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP23_PIXEL_1	TP23 toggle point. Defines the pixel-counter value for TP23. If PO6 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP23 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.165 TG_TOGGLE_POINT12_0
Address: 0x000 04C8
BANK3 Address: 0x48

RW	7	6	5	4	3	2	1	0
	TP24_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP24_PIXEL_0	TP24 toggle point. Defines the pixel-counter value for TP24. If PO7 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP24 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.166 TG_TOGGLE_POINT12_1
Address: 0x000 04C9
BANK3 Address: 0x49

RW	7	6	5	4	3	2	1	0
	TP24_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP24_PIXEL_1	TP24 toggle point. Defines the pixel-counter value for TP24. If PO7 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP24 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.167 TG_TOGGLE_POINT12_2
Address: 0x000 04CA
BANK3 Address: 0x4A

RW	7	6	5	4	3	2	1	0
	TP25_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP25_PIXEL_0	TP25 toggle point. Defines the pixel-counter value for TP25. If PO7 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP25 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.168 TG_TOGGLE_POINT12_3
Address: 0x000 04CB
BANK3 Address: 0x4B

RW	7	6	5	4	3	2	1	0
	TP25_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP25_PIXEL_1	TP25 toggle point. Defines the pixel-counter value for TP25. If PO7 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP25 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.169 TG_TOGGLE_POINT13_0
Address: 0x000 04CC
BANK3 Address: 0x4C

RW	7	6	5	4	3	2	1	0
	TP26_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP26_PIXEL_0	TP26 toggle point. Defines the pixel-counter value for TP26. If PO8 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP26 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.170 TG_TOGGLE_POINT13_1
Address: 0x000 04CD
BANK3 Address: 0x4D

RW	7	6	5	4	3	2	1	0
	TP26_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP26_PIXEL_1	TP26 toggle point. Defines the pixel-counter value for TP26. If PO8 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP26 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.171 TG_TOGGLE_POINT13_2
Address: 0x000 04CE
BANK3 Address: 0x4E

RW	7	6	5	4	3	2	1	0
	TP27_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP27_PIXEL_0	TP27 toggle point. Defines the pixel-counter value for TP27. If PO8 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP27 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.172 TG_TOGGLE_POINT13_3
Address: 0x000 04CF
BANK3 Address: 0x4F

RW	7	6	5	4	3	2	1	0
	TP27_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP27_PIXEL_1	TP27 toggle point. Defines the pixel-counter value for TP27. If PO8 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP27 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.173 TG_TOGGLE_POINT14_0
Address: 0x000 04D0
BANK3 Address: 0x50

RW	7	6	5	4	3	2	1	0
	TP28_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP28_PIXEL_0	TP28 toggle point. Defines the pixel-counter value for TP28. If PO9 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP28 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.174 TG_TOGGLE_POINT14_1
Address: 0x000 04D1
BANK3 Address: 0x51

RW	7	6	5	4	3	2	1	0
	TP28_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP28_PIXEL_1	TP28 toggle point. Defines the pixel-counter value for TP28. If PO9 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP28 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.175 TG_TOGGLE_POINT14_2
Address: 0x000 04D2
BANK3 Address: 0x52

RW	7	6	5	4	3	2	1	0
	TP29_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP29_PIXEL_0	TP29 toggle point. Defines the pixel-counter value for TP29. If PO9 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP29 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.176 TG_TOGGLE_POINT14_3
Address: 0x000 04D3
BANK3 Address: 0x53

RW	7	6	5	4	3	2	1	0
	TP29_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP29_PIXEL_1	TP29 toggle point. Defines the pixel-counter value for TP29. If PO9 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP29 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.177 TG_TOGGLE_POINT15_0
Address: 0x000 04D4
BANK3 Address: 0x54

RW	7	6	5	4	3	2	1	0
	TP30_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP30_PIXEL_0	TP30 toggle point. Defines the pixel-counter value for TP30. If PO10 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP30 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.178 TG_TOGGLE_POINT15_1
Address: 0x000 04D5
BANK3 Address: 0x55

RW	7	6	5	4	3	2	1	0
	TP30_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP30_PIXEL_1	TP30 toggle point. Defines the pixel-counter value for TP30. If PO10 is configured for direct control and second pulse is enabled, this field configures the rising edge of the second pulse; TP30 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.179 TG_TOGGLE_POINT15_2
Address: 0x000 04D6
BANK3 Address: 0x56

RW	7	6	5	4	3	2	1	0
	TP31_PIXEL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP31_PIXEL_0	TP31 toggle point. Defines the pixel-counter value for TP31. If PO10 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP31 is not supported in this case. Bits[7:0] of a 16-bit field.

8.5.180 TG_TOGGLE_POINT15_3
Address: 0x000 04D7
BANK3 Address: 0x57

RW	7	6	5	4	3	2	1	0
	TP31_PIXEL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	TP31_PIXEL_1	TP31 toggle point. Defines the pixel-counter value for TP31. If PO10 is configured for direct control and second pulse is enabled, this field configures the falling edge of the second pulse; TP31 is not supported in this case. Bits[15:8] of a 16-bit field.

8.5.181 TG_OUTMUX_CFG0_0
Address: 0x000 04D8
BANK3 Address: 0x58

RW	7	6	5	4	3	2	1	0
	PCK1_PO_SEL			PCK1_DLY		CLKOUT1_POL	CLKOUT1_EN	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PCK1_PO_SEL	CLKOUT1 pulse signal selection from PO0 to PO10 0x0 = (Default) Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
3:2	PCK1_DLY	Toggle Pulse Delay for CLKOUT1 00 = (Default) No delay 01 = 1 ns 10 = 2 ns 11 = 3 ns
1	CLKOUT1_POL	Clock Inversion Control for CLKOUT1 0 = (Default) Disabled 1 = Enabled
0	CLKOUT1_EN	Clock Output Enable for CLKOUT1 0 = (Default) Disabled 1 = Enabled

8.5.182 TG_OUTMUX_CFG0_1
Address: 0x000 04D9
BANK3 Address: 0x59

RW	7	6	5	4	3	2	1	0
	PCK2_PO_SEL			PCK2_DLY		CLKOUT2_POL	CLKOUT2_EN	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PCK2_PO_SEL	CLKOUT2 pulse signal selection from PO0 to PO10 0x0 = (Default) Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
3:2	PCK2_DLY	Toggle Pulse Delay for CLKOUT2 00 = (Default) No delay 01 = 1 ns 10 = 2 ns 11 = 3 ns
1	CLKOUT2_POL	Clock Inversion Control for CLKOUT2 0 = (Default) Disabled 1 = Enabled
0	CLKOUT2_EN	Clock Output Enable for CLKOUT2 0 = (Default) Disabled 1 = Enabled

8.5.183 TG_OUTMUX_CFG0_2
Address: 0x000 04DA
BANK3 Address: 0x5A

RW	7	6	5	4	3	2	1	0
	PCK3_PO_SEL				PCK3_DLY		CLKOUT3_POL	CLKOUT3_EN
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PCK3_PO_SEL	CLKOUT3 pulse signal selection from PO0 to PO10 0x0 = (Default) Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
3:2	PCK3_DLY	Toggle Pulse Delay for CLKOUT3 00 = (Default) No delay 01 = 1 ns 10 = 2 ns 11 = 3 ns
1	CLKOUT3_POL	Clock Inversion Control for CLKOUT3 0 = (Default) Disabled 1 = Enabled
0	CLKOUT3_EN	Clock Output Enable for CLKOUT3 0 = (Default) Disabled 1 = Enabled

8.5.184 TG_OUTMUX_CFG0_3
Address: 0x000 04DB
BANK3 Address: 0x5B

RW	7	6	5	4	3	2	1	0
	PCK4_PO_SEL				PCK4_DLY		CLKOUT4_POL	CLKOUT4_EN
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PCK4_PO_SEL	CLKOUT4 pulse signal selection from PO0 to PO10 0x0 = (Default) Pulse Output PO0 0x1 = Pulse Output PO1 0x2 = Pulse Output PO2 0x3 = Pulse Output PO3 0x4 = Pulse Output PO4 0x5 = Pulse Output PO5 0x6 = Pulse Output PO6 0x7 = Pulse Output PO7 0x8 = Pulse Output PO8 0x9 = Pulse Output PO9 0xA = Pulse Output PO10 0xB–0xF = Reserved
3:2	PCK4_DLY	Toggle Pulse Delay for CLKOUT4 00 = (Default) No delay 01 = 1 ns 10 = 2 ns 11 = 3 ns
1	CLKOUT4_POL	Clock Inversion Control for CLKOUT4 0 = (Default) Disabled 1 = Enabled
0	CLKOUT4_EN	Clock Output Enable for CLKOUT4 0 = (Default) Disabled 1 = Enabled

8.5.185 TG_OUTMUX_CFG2_3
Address: 0x000 04E3
BANK3 Address: 0x63

RW	7	6	5	4	3	2	1	0
	—				CLKOUT4_SRC	CLKOUT3_SRC	CLKOUT2_SRC	CLKOUT1_SRC
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3	CLKOUT4_SRC	Clock/Pulse Signal Selection for CLKOUT4 0 = (Default) C_CHK4 pulse from DLL1 1 = P_CHK4 pulse waveform from POn
2	CLKOUT3_SRC	Clock/Pulse Signal Selection for CLKOUT3 0 = (Default) C_CHK3 pulse from DLL1 1 = P_CHK3 pulse waveform from POn

Bits	Name	Description
1	CLKOUT2_SRC	Clock/Pulse Signal Selection for CLKOUT2 0 = (Default) C_CHK2 pulse from DLL1 1 = P_CHK2 pulse waveform from POn
0	CLKOUT1_SRC	Clock/Pulse Signal Selection for CLKOUT1 0 = (Default) C_CHK1 pulse from DLL1 1 = P_CHK1 pulse waveform from POn

8.5.186 DLL_CFG1_0
Address: 0x000 04E4
BANK3 Address: 0x64

RW	7	6	5	4	3	2	1	0
	—		DLL_RSMP_RISE					
Default	0	0	1	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_RSMP_RISE	RSMP rise timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x20 = (Default) 32 tap

8.5.187 DLL_CFG1_1
Address: 0x000 04E5
BANK3 Address: 0x65

RW	7	6	5	4	3	2	1	0
	—		DLL_RSMP_FALL					
Default	0	0	1	0	0	1	1	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_RSMP_FALL	RSMP fall timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x26 = (Default) 38 tap

8.5.188 DLL_CFG1_2
Address: 0x000 04E6
BANK3 Address: 0x66

RW	7	6	5	4	3	2	1	0
	—		DLL_VSMP_RISE					
Default	0	0	1	0	1	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_VSMP_RISE	VSMP rise timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x28 = (Default) 40 tap

8.5.189 DLL_CFG1_3
Address: 0x000 04E7
BANK3 Address: 0x67

RW	7	6	5	4	3	2	1	0
	—		DLL_VSMP_FALL					
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_VSMP_FALL	VSMP fall timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x08 = (Default) 8 tap

8.5.190 DLL_CFG2_0
Address: 0x000 04E8
BANK3 Address: 0x68

RW	7	6	5	4	3	2	1	0
	—		DLL_CK1_RISE					
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_CK1_RISE	C_CK1 rise timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x0A = (Default) 10 tap

8.5.191 DLL_CFG2_1
Address: 0x000 04E9
BANK3 Address: 0x69

RW	7	6	5	4	3	2	1	0
	DLL_CK1_DIV	—	DLL_CK1_FALL					
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	DLL_CK1_DIV	C_CK1 divide by two 0 = (Default) no division 1 = div2
6	—	Reserved
5:0	DLL_CK1_FALL	C_CK1 fall timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x19 = (Default) 25 tap

8.5.192 DLL_CFG2_2
Address: 0x000 04EA
BANK3 Address: 0x6A

RW	7	6	5	4	3	2	1	0
	—		DLL_CK2_RISE					
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_CK2_RISE	C_CK2 rise timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved 0x19 = (Default) 25 tap

8.5.193 DLL_CFG2_3
Address: 0x000 04EB
BANK3 Address: 0x6B

RW	7	6	5	4	3	2	1	0
	DLL_CK2_DIV	—	DLL_CK2_FALL					
Default	0	0	1	0	1	0	0	0

Bits	Name	Description
7	DLL_CK2_DIV	C_CK2 divide by two 0 = (Default) no division 1 = div2
6	—	Reserved
5:0	DLL_CK2_FALL	C_CK2 fall timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved ... 0x28 = (Default) 40 tap

8.5.194 DLL_CFG3_0
Address: 0x000 04EC
BANK3 Address: 0x6C

RW	7	6	5	4	3	2	1	0
	—		DLL_CK3_RISE					
Default	0	0	1	0	1	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_CK3_RISE	C_CK3 rise timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved ... 0x28 = (Default) 40 tap

8.5.195 DLL_CFG3_1
Address: 0x000 04ED
BANK3 Address: 0x6D

RW	7	6	5	4	3	2	1	0
	DLL_CK3_DIV	—	DLL_CK3_FALL					
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7	DLL_CK3_DIV	C_CK3 divide by two 0 = (Default) no division 1 = div2
6	—	Reserved
5:0	DLL_CK3_FALL	C_CK3 fall timing 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved ... 0x0A = (Default) 10 tap

8.5.196 DLL_CFG3_2
Address: 0x000 04EE
BANK3 Address: 0x6E

RW	7	6	5	4	3	2	1	0
	—		DLL_CK4_RISE					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_CK4_RISE	C_CK4 rise timing 0x00 = (Default) 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved

8.5.197 DLL_CFG3_3
Address: 0x000 04EF
BANK3 Address: 0x6F

RW	7	6	5	4	3	2	1	0
	DLL_CK4_DIV		—		DLL_CK4_FALL			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	DLL_CK4_DIV	C_CK4 divide by two 0 = (Default) no division 1 = div2
6	—	Reserved
5:0	DLL_CK4_FALL	C_CK4 fall timing 0x00 = (Default) 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved

8.5.198 DLL_CFG5_0
Address: 0x000 04F4
BANK3 Address: 0x74

RW	7	6	5	4	3	2	1	0
	—		DLL_TGCKO_RISE					
Default	0	0	1	1	0	1	1	1

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_TGCKO_RISE	TGCKO rise timing. Configures the rise/fall edge timing of the POn pulse outputs. 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved ... 0x37 = (Default) 55 tap

8.5.199 DLL_CFG5_1
Address: 0x000 04F5
BANK3 Address: 0x75

RW	7	6	5	4	3	2	1	0
	—		DLL_AFECK_DUR					
Default	0	0	0	1	0	1	1	0

Bits	Name	Description
7:6	—	Reserved
5:0	DLL_AFECK_DUR	AFECK pulse duration 0x00 = 0 tap 0x01 = 1 tap ... 0x3B = 59 tap 0x3C–0x3F = Reserved ... 0x16 = (Default) 22 tap

8.6 OP_FORMAT—Output Formatter
8.6.1 OP_FORMAT_CFG0_0
Address: 0x000 0500
BANK0 Address: 0x4C

RW	7	6	5	4	3	2	1	0
	FORMAT_LOAD	FORMAT_SEL						
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7	FORMAT_LOAD	Output format load. If this bit is set, the FORMAT_SEL output format is loaded. This bit is cleared automatically when the selected format has been loaded. 0 = (Default) No action 1 = Load format
6:0	FORMAT_SEL	Output format selection. Set to the corresponding format ID value to select the data-output format.

8.6.2 OP_FORMAT_CFG0_1
Address: 0x000 0501
BANK0 Address: 0x4D

RW	7	6	5	4	3	2	1	0
			—		LVDS_POL	LVDS_REVERSE	CMOS_EXT_POL	LVDS_BIT_ORDER
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:4	—	Reserved
3	LVDS_POL	LVDS output polarity. If this bit is set, the LVDS data output is inverted. 0 = (Default) Normal 1 = Inverted
2	LVDS_REVERSE	LVDS format reverse. If this bit is set, each LVDS data block is time-reversed. 0 = (Default) Normal 1 = Reverse
1	CMOS_EXT_POL	CMOS (External) phase control. Selects which MCLK edge the output format is synchronized to. 0 = (Default) Rising edge 1 = Falling edge
0	LVDS_BIT_ORDER	LVDS bit order. If this bit is 0, the bit order (MSB/LSB) is swapped. 0 = Swapped 1 = (Default) Normal

8.6.3 OP_FORMAT_CFG0_2
Address: 0x000 0502
BANK0 Address: 0x4E

RW	7	6	5	4	3	2	1	0
				—			TDM_GAP	TDM_EN
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:2	—	Reserved
1	TDM_GAP	TDM gap. If this bit is set in TDM Mode, a gap of one MCLK cycle is inserted after each data-output phase. 0 = (Default) Disabled 1 = Enabled
0	TDM_EN	TDM Mode enable. Allows two devices to output data on a single data bus. 0 = (Default) Disabled 1 = Enabled

8.6.4 OP_FORMAT_CFG0_3
Address: 0x000 0503
BANK0 Address: 0x4F

RW	7	6	5	4	3	2	1	0
						TDM_OFFSET		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4:0	TDM_OFFSET	TDM output timing control. This field is used to offset the data-output timing in TDM Mode. 0x00 = (Default) 0 bit 0x01 = 1 bit ... 0x1F = 31 bit

8.6.5 OP_FORMAT_CFG1_0
Address: 0x000 0504
BANK0 Address: 0x50

RW	7	6	5	4	3	2	1	0
	FLAG_S1_FN				FLAG_S0_FN			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	FLAG_S1_FN	Status Flag S1 function select 0x0 = (Default) Logic 0 0x1 = Sequence State[0] 0x2 = Sequence State[1] 0x3 = FLAG_PIX1 0x4 = FLAG_PIX2 0x5 = FLAG_DEN1 0x6 = FLAG_DEN2 0x7 = Channel ID[0] 0x8 = Channel ID[1] 0x9 = Channel ID[2] 0xA–0xE = Reserved 0xF = Logic 1
3:0	FLAG_S0_FN	Status Flag S0 function select 0x0 = (Default) Logic 0 0x1 = Sequence State[0] 0x2 = Sequence State[1] 0x3 = FLAG_PIX1 0x4 = FLAG_PIX2 0x5 = FLAG_DEN1 0x6 = FLAG_DEN2 0x7 = Channel ID[0] 0x8 = Channel ID[1] 0x9 = Channel ID[2] 0xA–0xE = Reserved 0xF = Logic 1

8.6.6 OP_FORMAT_CFG1_1
Address: 0x000 0505
BANK0 Address: 0x51

RW	7	6	5	4	3	2	1	0
	FLAG_S3_FN				FLAG_S2_FN			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	FLAG_S3_FN	Status Flag S3 function select 0x0 = (Default) Logic 0 0x1 = Sequence State[0] 0x2 = Sequence State[1] 0x3 = FLAG_PIX1 0x4 = FLAG_PIX2 0x5 = FLAG_DEN1 0x6 = FLAG_DEN2 0x7 = Channel ID[0] 0x8 = Channel ID[1] 0x9 = Channel ID[2] 0xA–0xE = Reserved 0xF = Logic 1
3:0	FLAG_S2_FN	Status Flag S2 function select 0x0 = (Default) Logic 0 0x1 = Sequence State[0] 0x2 = Sequence State[1] 0x3 = FLAG_PIX1 0x4 = FLAG_PIX2 0x5 = FLAG_DEN1 0x6 = FLAG_DEN2 0x7 = Channel ID[0] 0x8 = Channel ID[1] 0x9 = Channel ID[2] 0xA–0xE = Reserved 0xF = Logic 1

8.6.7 OP_FORMAT_CFG1_2
Address: 0x000 0506
BANK0 Address: 0x52

RW	7	6	5	4	3	2	1	0
	—				FLAG_S4_FN			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	FLAG_S4_FN	Status Flag S4 function select 0x0 = (Default) Logic 0 0x1 = Sequence State[0] 0x2 = Sequence State[1] 0x3 = FLAG_PIX1 0x4 = FLAG_PIX2 0x5 = FLAG_DEN1 0x6 = FLAG_DEN2 0x7 = Channel ID[0] 0x8 = Channel ID[1] 0x9 = Channel ID[2] 0xA–0xE = Reserved 0xF = Logic 1

8.7 PAD_INTF—Pad Interface I/O Control

8.7.1 CLKOUT_SEL_1_0

Address: 0x000 0600
BANK0 Address: 0x54

RW	7	6	5	4	3	2	1	0
	CLKOUT4_FN	CLKOUT3_FN			CLKOUT2_FN		CLKOUT1_FN	
Default	0	0	0	1	0	1	0	1

Bits	Name	Description
7	CLKOUT4_FN	CLKOUT4 pin function select 0 = (Default) General purpose input/output (GPIO4) 1 = CLKOUT4 output
6:4	CLKOUT3_FN	CLKOUT3 pin function select 000 = Blue LED control input 001 = (Default) RSMP input for reset sampling in External Mode 010 = General purpose input/output (GPIO3) 011 = CLKOUT3 output 100 = Monitor/test output 101–111 = Reserved
3:2	CLKOUT2_FN	CLKOUT2 pin function select 00 = Green LED control input 01 = (Default) External LED Start input for use in synchronising internal LED enables 10 = General purpose input/output (GPIO2) 11 = CLKOUT2 output
1:0	CLKOUT1_FN	CLKOUT1 pin function select 00 = Red LED control input 01 = (Default) External TGSYNC input for use in generating timing signals in External Mode 10 = General purpose input/output (GPIO1) 11 = CLKOUT1 output

8.7.2 CLKOUT_SEL_1_2

Address: 0x000 0602
BANK0 Address: 0x56

RW	7	6	5	4	3	2	1	0
	—			MON_SEL		TGSYNC1_VSMP_FN		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4:2	MON_SEL	MON pin function select 000 = (Default) VSMP output 001 = RSMP output 010 = AFECK output 011 = Data clock output 100 = PLL clock output 101–111 = Reserved
1:0	TGSYNC1_VSMP_FN	TGSYNC1/VMSMP_EXT pin function select 00 = (Default) VSMP input for video sampling in External Mode 01 = TGSYNC1 input 10 = Reserved 11 = TGSYNC output

8.7.3 CLKOUT_SEL_1_3

Address: 0x000 0603
BANK0 Address: 0x57

RW	7	6	5	4	3	2	1	0
	—			TDM_DOUT_DLY_SEL		TDM_DOUT_DLY_EN	MCLK_EXT_LVDS	
Default	0	0	0	0	0	1	0	0

Bits	Name	Description
7:4	—	Reserved
3:2	TDM_DOUT_DLY_SEL	Selects output delay in TDM Mode. Only valid if TDM_DOUT_DLY_EN=1. 00 = 0.5 nsec 01 = (Default) 1.0 nsec 10 = 1.5 nsec 11 = 2.0 nsec

Bits	Name	Description
1	TDM_DOUT_DLY_EN	Enables output delay in TDM Mode. The delay is configured using TDM_DOUT_DLY_SEL. 0 = (Default) Disabled 1 = Enabled
0	MCLK_EXT_LVDS	MCLK input selection. In CMOS Mode, general-purpose input GP12 is supported on the MCLK_EXT_N pin. 0 = (Default) CMOS (MCLK_EXT) 1 = LVDS (MCLK_EXT_P/N)

8.7.4 GPI_VAL_0

Address: 0x000 060C
BANK6 Address: 0x0C

RO	7	6	5	4	3	2	1	0
		—		GP4_IN_STS	GP3_IN_STS	GP2_IN_STS	GP1_IN_STS	GP12_IN_STS
Default	X	X	X	X	X	X	X	X

Bits	Name	Description
7:5	—	Reserved
4	GP4_IN_STS	GP4 input status 0 = Low 1 = High
3	GP3_IN_STS	GP3 input status 0 = Low 1 = High
2	GP2_IN_STS	GP2 input status 0 = Low 1 = High
1	GP1_IN_STS	GP1 input status 0 = Low 1 = High
0	GP12_IN_STS	GP12 input status 0 = Low 1 = High

8.7.5 GPI_VAL_2

Address: 0x000 060E
BANK6 Address: 0x0E

RW	7	6	5	4	3	2	1	0
			—		GP4_DIR	GP3_DIR	GP2_DIR	GP1_DIR
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3	GP4_DIR	GPIO4 pin direction 0 = (Default) Input 1 = Output
2	GP3_DIR	GPIO3 pin direction 0 = (Default) Input 1 = Output
1	GP2_DIR	GPIO2 pin direction 0 = (Default) Input 1 = Output
0	GP1_DIR	GPIO1 pin direction 0 = (Default) Input 1 = Output

8.7.6 GPI_VAL_3
Address: 0x000 060F
BANK6 Address: 0x0F

RW	7	6	5	4	3	2	1	0
			—		GP4_OUT_LVL	GP3_OUT_LVL	GP2_OUT_LVL	GP1_OUT_LVL
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3	GP4_OUT_LVL	GP4 output level 0 = (Default) Low 1 = High
2	GP3_OUT_LVL	GP3 output level 0 = (Default) Low 1 = High
1	GP2_OUT_LVL	GP2 output level 0 = (Default) Low 1 = High
0	GP1_OUT_LVL	GP1 output level 0 = (Default) Low 1 = High

8.7.7 LVDS_CFG
Address: 0x000 0610
BANK6 Address: 0x10

RW	7	6	5	4	3	2	1	0
				—			LVDS_VREF_SEL	
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:2	—	Reserved
1:0	LVDS_VREF_SEL	LVDS pad voltage selection 00 = From internal resistor divider on VDD-0.9 V 01 = (Default) From internal resistor divider on VDD-1.2 V 10 = Not supported 11 = From external reference voltage on VREF VDD-1.2 V or 0.9 V

8.7.8 CMOS_CFG_0
Address: 0x000 0618
BANK6 Address: 0x18

RW	7	6	5	4	3	2	1	0
	—	SPI_SDO_I2C_SCL_DRV_STR			SPI_SDO_I2C_SCL_PULL		SPI_MISO_I2C_SCL_HIZ_EN	SPI_MISO_I2C_SCL_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	SPI_SDO_I2C_SCL_DRV_STR	SPI_SDO/I2C_SCL output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	SPI_SDO_I2C_SCL_PULL	SPI_SDO/I2C_SCL pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	SPI_MISO_I2C_SCL_HIZ_EN	SPI_SDO/I2C_SCL High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	SPI_MISO_I2C_SCL_IE	SPI_SDO/I2C_SCL input enable 0 = Disabled 1 = (Default) Enabled

8.7.9 CMOS_CFG_1
Address: 0x000 0619
BANK6 Address: 0x19

RW	7	6	5	4	3	2	1	0
	—	SPI_MOSI_I2C_SDA_DRV_STR			SPI_MOSI_I2C_SDA_PULL		SPI_MOSI_I2C_SDA_HIZ_EN	SPI_MOSI_I2C_SDA_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	SPI_MOSI_I2C_SDA_DRV_STR	SPI_SDI_I2C_SDA output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	SPI_MOSI_I2C_SDA_PULL	SPI_SDI_I2C_SDA pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	SPI_MOSI_I2C_SDA_HIZ_EN	SPI_SDI_I2C_SDA High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	SPI_MOSI_I2C_SDA_IE	SPI_SDI_I2C_SDA input enable 0 = Disabled 1 = (Default) Enabled

8.7.10 CMOS_CFG_2
Address: 0x000 061A
BANK6 Address: 0x1A

RW	7	6	5	4	3	2	1	0
	—			SPI_SCK_PULL		—	SPI_SCK_IE	
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7:4	—	Reserved
3:2	SPI_SCK_PULL	SPI_SCK pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	—	Reserved
0	SPI_SCK_IE	SPI_SCK input enable 0 = Disabled 1 = (Default) Enabled

8.7.11 CMOS_CFG_3
Address: 0x000 061B
BANK6 Address: 0x1B

RW	7	6	5	4	3	2	1	0
	—			SPI_CS_PULL		—	SPI_CS_IE	
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7:4	—	Reserved
3:2	SPI_CS_PULL	SPI_CS pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	—	Reserved
0	SPI_CS_IE	SPI_CS input enable 0 = Disabled 1 = (Default) Enabled

8.7.12 MCLK_CFG_0
Address: 0x000 061C
BANK6 Address: 0x1C

RW	7	6	5	4	3	2	1	0
	—	MCLK_LVDS_RT_EN				—		
Default	0	0	1	0	0	0	0	0

Bits	Name	Description
7	—	Reserved
6	MCLK_LVDS_RT_EN	MCLK LVDS resistor termination 0 = (Default) Disabled 1 = Enabled
5:0	—	Reserved

8.7.13 MCLK_CFG_1
Address: 0x000 061D
BANK6 Address: 0x1D

RW	7	6	5	4	3	2	1	0
			—		MCLK_EXT_MCLK_EXT_P_PULL		MCLK_EXT_MCLK_EXT_P_HIZ_EN	MCLK_EXT_MCLK_EXT_P_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7:4	—	Reserved
3:2	MCLK_EXT_MCLK_EXT_P_PULL	MCLK_P pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	MCLK_EXT_MCLK_EXT_P_HIZ_EN	MCLK_P High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	MCLK_EXT_MCLK_EXT_P_IE	MCLK_P input enable 0 = Disabled 1 = (Default) Enabled

8.7.14 MCLK_CFG_2
Address: 0x000 061E
BANK6 Address: 0x1E

RW	7	6	5	4	3	2	1	0
					MCLK_EXT_N_GPI12_PULL		MCLK_EXT_N_GPI12_HIZ_EN	MCLK_EXT_N_GPI12_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7:4	—	Reserved
3:2	MCLK_EXT_N_GPI12_PULL	MCLK_N/GPI12 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	MCLK_EXT_N_GPI12_HIZ_EN	MCLK_N/GPI12 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	MCLK_EXT_N_GPI12_IE	MCLK_N/GPI12 input enable 0 = Disabled 1 = (Default) Enabled

8.7.15 CLKOUT1_4_CFG_0
Address: 0x000 0620
BANK6 Address: 0x20

RW	7	6	5	4	3	2	1	0
	—	CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_DRV_STR			CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_PULL		CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_HIZ_EN	CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_DRV_STR	CLKOUT1/LEDR_EN/TGSYNC2/GPIO1 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_PULL	CLKOUT1/LEDR_EN/TGSYNC2/GPIO1 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_HIZ_EN	CLKOUT1/LEDR_EN/TGSYNC2/GPIO1 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	CLKOUT1_LEDR_EN_TGSYNC2_GPIO1_IE	CLKOUT1/LEDR_EN/TGSYNC2/GPIO1 input enable 0 = Disabled 1 = (Default) Enabled

8.7.16 CLKOUT1_4_CFG_1
Address: 0x000 0621
BANK6 Address: 0x21

RW	7	6	5	4	3	2	1	0
	—	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_DRV_STR			CLKOUT2_LEDG_EN_LEDSTART_GPIO2_PULL		CLKOUT2_LEDG_EN_LEDSTART_GPIO2_HIZ_EN	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_DRV_STR	CLKOUT2/LEDG_EN/LED_START/GPIO2 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_PULL	CLKOUT2/LEDG_EN/LED_START/GPIO2 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_HIZ_EN	CLKOUT2/LEDG_EN/LED_START/GPIO2 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	CLKOUT2_LEDG_EN_LEDSTART_GPIO2_IE	CLKOUT2/LEDG_EN/LED_START/GPIO2 input enable 0 = Disabled 1 = (Default) Enabled

8.7.17 CLKOUT1_4_CFG_2
Address: 0x000 0622
BANK6 Address: 0x22

RW	7	6	5	4	3	2	1	0
	—	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_DRV_STR			CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_PULL		CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_HIZ_EN	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_DRV_STR	CLKOUT3/LEDB_EN/MON/RSMP_EXT/GPIO3 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA

Bits	Name	Description
3:2	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_PULL	CLKOUT3/LEDB_EN/MON/RSMP_EXT/GPIO3 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_HIZ_EN	CLKOUT3/LEDB_EN/MON/RSMP_EXT/GPIO3 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	CLKOUT3_LEDB_EN_MON_RSMP_EXT_GPIO3_IE	CLKOUT3/LEDB_EN/MON/RSMP_EXT/GPIO3 input enable 0 = Disabled 1 = (Default) Enabled

8.7.18 CLKOUT1_4_CFG_3
Address: 0x000 0623
BANK6 Address: 0x23

RW	7	6	5	4	3	2	1	0
	—	CLKOUT4_GPIO4_DRV_STR			CLKOUT4_GPIO4_PULL		CLKOUT4_GPIO4_HIZ_EN	CLKOUT4_GPIO4_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	CLKOUT4_GPIO4_DRV_STR	CLKOUT4/GPIO4 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	CLKOUT4_GPIO4_PULL	CLKOUT4/GPIO4 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	CLKOUT4_GPIO4_HIZ_EN	CLKOUT4/GPIO4 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	CLKOUT4_GPIO4_IE	CLKOUT4/GPIO4 input enable 0 = Disabled 1 = (Default) Enabled

8.7.19 TGSYNC1_VSMP_EXT_CFG
Address: 0x000 062C
BANK6 Address: 0x2C

RW	7	6	5	4	3	2	1	0
	—	TGSYNC1_VSMP_EXT_DRV_STR			TGSYNC1_VSMP_EXT_PULL		TGSYNC1_VSMP_EXT_HIZ_EN	TGSYNC1_VSMP_EXT_IE
Default	0	0	0	1	1	0	0	1

Bits	Name	Description
7	—	Reserved
6:4	TGSYNC1_VSMP_EXT_DRV_STR	TGSYNC1/VSMP_EXT output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	TGSYNC1_VSMP_EXT_PULL	TGSYNC1/VSMP_EXT pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	TGSYNC1_VSMP_EXT_HIZ_EN	TGSYNC1/VSMP_EXT High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	TGSYNC1_VSMP_EXT_IE	TGSYNC1/VSMP_EXT input enable 0 = Disabled 1 = (Default) Enabled

8.7.20 DOUT_CH1_CFG_0
Address: 0x000 0630
BANK6 Address: 0x30

RW	7	6	5	4	3	2	1	0
	—	DOUT1_P_DOUT1_DRV_STR			DOUT1_P_DOUT1_PULL		DOUT1_P_DOUT1_HI_Z_EN	DOUT1_P_DOUT1_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DOUT1_P_DOUT1_DRV_STR	DOUT1_P/DOUT1 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DOUT1_P_DOUT1_PULL	DOUT1_P/DOUT1 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DOUT1_P_DOUT1_HI_Z_EN	DOUT1_P/DOUT1 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DOUT1_P_DOUT1_IE	DOUT1_P/DOUT1 input enable 0 = (Default) Disabled 1 = Enabled

8.7.21 DOUT_CH1_CFG_1
Address: 0x000 0631
BANK6 Address: 0x31

RW	7	6	5	4	3	2	1	0
	—	DOUT1_N_DOUT2_DRV_STR			DOUT1_N_DOUT2_PULL		DOUT1_N_DOUT2_HI_Z_EN	DOUT1_N_DOUT2_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DOUT1_N_DOUT2_DRV_STR	DOUT1_N/DOUT2 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DOUT1_N_DOUT2_PULL	DOUT1_N/DOUT2 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DOUT1_N_DOUT2_HI_Z_EN	DOUT1_N/DOUT2 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DOUT1_N_DOUT2_IE	DOUT1_N/DOUT2 input enable 0 = (Default) Disabled 1 = Enabled

8.7.22 DCLKOUT_CFG_2
Address: 0x000 0632
BANK6 Address: 0x32

RW	7	6	5	4	3	2	1	0
	—				DCLKOUT_LVDS_TXDRV		DCLKOUT_LVDS_TRIM	
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:4	—	Reserved

Bits	Name	Description
3:2	DCLKOUT_LVDS_TXDRV	DCLKOUT_LVDS drive current control The reference voltage is selected using LVDS_VREF_SEL. 00 = 0 mA 01 = 1.1 mA (Vref=1.2V), 0.85 mA (Vref=0.9V) 10 = (Default) 2.2 mA (Vref=1.2V), 1.7 mA (Vref=0.9V) 11 = 3.3 mA (Vref=1.2V), 2.5 mA (Vref=0.9V)
1:0	DCLKOUT_LVDS_TRIM	DCLKOUT_LVDS bias resistor trim 00–01 = Reserved 10 = (Default) 0% 11 = Reserved

8.7.23 DOUT_CH2_CFG_0

Address: 0x000 0634
BANK6 Address: 0x34

RW	7	6	5	4	3	2	1	0
	—	DOUT2_P_DOUT3_DRV_STR			DOUT2_P_DOUT3_PULL		DOUT2_P_DOUT3_HIZ_EN	DOUT2_P_DOUT3_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DOUT2_P_DOUT3_DRV_STR	DOUT2_P/DOUT3 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DOUT2_P_DOUT3_PULL	DOUT2_P/DOUT3 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DOUT2_P_DOUT3_HIZ_EN	DOUT2_P/DOUT3 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DOUT2_P_DOUT3_IE	DOUT2_P/DOUT3 input enable 0 = (Default) Disabled 1 = Enabled

8.7.24 DOUT_CH2_CFG_1

Address: 0x000 0635
BANK6 Address: 0x35

RW	7	6	5	4	3	2	1	0
	—	DOUT2_N_DOUT4_DRV_STR			DOUT2_N_DOUT4_PULL		DOUT2_N_DOUT4_HIZ_EN	DOUT2_N_DOUT4_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DOUT2_N_DOUT4_DRV_STR	DOUT2_N/DOUT4 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DOUT2_N_DOUT4_PULL	DOUT2_N/DOUT4 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DOUT2_N_DOUT4_HIZ_EN	DOUT2_N/DOUT4 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DOUT2_N_DOUT4_IE	DOUT2_N/DOUT4 input enable 0 = (Default) Disabled 1 = Enabled

8.7.25 DOUT_CH1_CFG_2
Address: 0x000 0636
BANK6 Address: 0x36

RW	7	6	5	4	3	2	1	0
			—		DOUT1_LVDS_TXDRV		DOUT1_LVDS_TRIM	
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:4	—	Reserved
3:2	DOUT1_LVDS_TXDRV	DOUT1_LVDS drive current control The reference voltage is selected using LVDS_VREF_SEL. 00 = 0 mA 01 = 1.1 mA (Vref=1.2V), 0.85 mA (Vref=0.9V) 10 = (Default) 2.2 mA (Vref=1.2V), 1.7 mA (Vref=0.9V) 11 = 3.3 mA (Vref=1.2V), 2.5 mA (Vref=0.9V)
1:0	DOUT1_LVDS_TRIM	DOUT1_LVDS bias resistor trim 00–01 = Reserved 10 = (Default) 0% 11 = Reserved

8.7.26 DOUT_CH3_CFG_0
Address: 0x000 0638
BANK6 Address: 0x38

RW	7	6	5	4	3	2	1	0
	—	DOUT3_P_DOUT5_DRV_STR			DOUT3_P_DOUT5_PULL		DOUT3_P_DOUT5_HIZ_EN	DOUT3_P_DOUT5_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DOUT3_P_DOUT5_DRV_STR	DOUT3_P/DOUT5 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DOUT3_P_DOUT5_PULL	DOUT3_P/DOUT5 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DOUT3_P_DOUT5_HIZ_EN	DOUT3_P/DOUT5 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DOUT3_P_DOUT5_IE	DOUT3_P/DOUT5 input enable 0 = (Default) Disabled 1 = Enabled

8.7.27 DOUT_CH3_CFG_1
Address: 0x000 0639
BANK6 Address: 0x39

RW	7	6	5	4	3	2	1	0
	—	DOUT3_N_DOUT6_DRV_STR			DOUT3_N_DOUT6_PULL		DOUT3_N_DOUT6_HIZ_EN	DOUT3_N_DOUT6_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DOUT3_N_DOUT6_DRV_STR	DOUT3_N/DOUT6 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DOUT3_N_DOUT6_PULL	DOUT3_N/DOUT6 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper

Bits	Name	Description
1	DOUT3_N_DOUT6_HIZ_EN	DOUT3_N/DOUT6 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DOUT3_N_DOUT6_IE	DOUT3_N/DOUT6 input enable 0 = (Default) Disabled 1 = Enabled

8.7.28 DOUT_CH2_CFG_2
Address: 0x000 063A
BANK6 Address: 0x3A

RW	7	6	5	4	3	2	1	0
			—		DOUT2_LVDS_TXDRV		DOUT2_LVDS_TRIM	
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:4	—	Reserved
3:2	DOUT2_LVDS_TXDRV	DOUT2_LVDS drive current control The reference voltage is selected using LVDS_VREF_SEL. 00 = 0 mA 01 = 1.1 mA (Vref=1.2V), 0.85 mA (Vref=0.9V) 10 = (Default) 2.2 mA (Vref=1.2V), 1.7 mA (Vref=0.9V) 11 = 3.3 mA (Vref=1.2V), 2.5 mA (Vref=0.9V)
1:0	DOUT2_LVDS_TRIM	DOUT2_LVDS bias resistor trim 00–01 = Reserved 10 = (Default) 0% 11 = Reserved

8.7.29 DOUT_CH3_CFG_2
Address: 0x000 063E
BANK6 Address: 0x3E

RW	7	6	5	4	3	2	1	0
			—		DOUT3_LVDS_TXDRV		DOUT3_LVDS_TRIM	
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:4	—	Reserved
3:2	DOUT3_LVDS_TXDRV	DOUT3_LVDS drive current control The reference voltage is selected using LVDS_VREF_SEL. 00 = 0 mA 01 = 1.1 mA (Vref=1.2V), 0.85 mA (Vref=0.9V) 10 = (Default) 2.2 mA (Vref=1.2V), 1.7 mA (Vref=0.9V) 11 = 3.3 mA (Vref=1.2V), 2.5 mA (Vref=0.9V)
1:0	DOUT3_LVDS_TRIM	DOUT3_LVDS bias resistor trim 00–01 = Reserved 10 = (Default) 0% 11 = Reserved

8.7.30 DOUT_CH4_CFG_2
Address: 0x000 0642
BANK6 Address: 0x42

RW	7	6	5	4	3	2	1	0
			—		DOUT4_LVDS_TXDRV		DOUT4_LVDS_TRIM	
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:4	—	Reserved
3:2	DOUT4_LVDS_TXDRV	DOUT4_LVDS drive current control The reference voltage is selected using LVDS_VREF_SEL. 00 = 0 mA 01 = 1.1 mA (Vref=1.2V), 0.85 mA (Vref=0.9V) 10 = (Default) 2.2 mA (Vref=1.2V), 1.7 mA (Vref=0.9V) 11 = 3.3 mA (Vref=1.2V), 2.5 mA (Vref=0.9V)
1:0	DOUT4_LVDS_TRIM	DOUT4_LVDS bias resistor trim 00–01 = Reserved 10 = (Default) 0% 11 = Reserved

8.7.31 DCLKOUT_CFG_0
Address: 0x000 0644
BANK6 Address: 0x44

RW	7	6	5	4	3	2	1	0
	—	DCLKOUT_P_DCLKOUT1_DOUT7_DRV_STR			DCLKOUT_P_DCLKOUT1_DOUT7_PULL		DCLKOUT_P_DCLKOUT1_DOUT7_HIZ_EN	DCLKOUT_P_DCLKOUT1_DOUT7_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DCLKOUT_P_DCLKOUT1_DOUT7_DRV_STR	DCLKOUT_P/DCLKOUT1/DOUT7 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DCLKOUT_P_DCLKOUT1_DOUT7_PULL	DCLKOUT_P/DCLKOUT1/DOUT7 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DCLKOUT_P_DCLKOUT1_DOUT7_HIZ_EN	DCLKOUT_P/DCLKOUT1/DOUT7 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DCLKOUT_P_DCLKOUT1_DOUT7_IE	DCLKOUT_P/DCLKOUT1/DOUT7 input enable 0 = (Default) Disabled 1 = Enabled

8.7.32 DCLKOUT_CFG_1
Address: 0x000 0645
BANK6 Address: 0x45

RW	7	6	5	4	3	2	1	0
	—	DCLKOUT_N_DCLKOUT2_DOUT8_DRV_STR			DCLKOUT_N_DCLKOUT2_DOUT8_PULL		DCLKOUT_N_DCLKOUT2_DOUT8_HIZ_EN	DCLKOUT_N_DCLKOUT2_DOUT8_IE
Default	0	0	0	1	1	0	0	0

Bits	Name	Description
7	—	Reserved
6:4	DCLKOUT_N_DCLKOUT2_DOUT8_DRV_STR	DCLKOUT_N/DCLKOUT2/DOUT8 output drive strength 000 = 1.6 mA 001 = (Default) 3.1 mA 010 = 4.5 mA 011–110 = Reserved 111 = 10.4 mA
3:2	DCLKOUT_N_DCLKOUT2_DOUT8_PULL	DCLKOUT_N/DCLKOUT2/DOUT8 pull resistor and bus-keeper configuration 00 = Disabled 01 = Pull-up 10 = (Default) Pull-down 11 = Bus keeper
1	DCLKOUT_N_DCLKOUT2_DOUT8_HIZ_EN	DCLKOUT_N/DCLKOUT2/DOUT8 High-Z enable 0 = (Default) Normal 1 = Hi-Z
0	DCLKOUT_N_DCLKOUT2_DOUT8_IE	DCLKOUT_N/DCLKOUT2/DOUT8 input enable 0 = (Default) Disabled 1 = Enabled

8.7.33 DOUT_CH5_CFG_2
Address: 0x000 0646
BANK6 Address: 0x46

RW	7	6	5	4	3	2	1	0
	—			DOUT5_LVDS_TXDRV		DOUT5_LVDS_TRIM		
Default	0	0	0	0	1	0	1	0

Bits	Name	Description
7:4	—	Reserved

Bits	Name	Description
3:2	DOUT5_LVDS_TXDRV	DOUT5_LVDS drive current control The reference voltage is selected using LVDS_VREF_SEL. 00 = 0 mA 01 = 1.1 mA (Vref=1.2V), 0.85 mA (Vref=0.9V) 10 = (Default) 2.2 mA (Vref=1.2V), 1.7 mA (Vref=0.9V) 11 = 3.3 mA (Vref=1.2V), 2.5 mA (Vref=0.9V)
1:0	DOUT5_LVDS_TRIM	DOUT5_LVDS bias resistor trim 00–01 = Reserved 10 = (Default) 0% 11 = Reserved

8.8 DAC_CTRL—DAC_CTRL

8.8.1 DAC_CTRL_OFS01_CH1_0

Address: 0x000 0704
BANK0 Address: 0x5C

RW	7	6	5	4	3	2	1	0
	CH1_SEQ0_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ0_OFFSET_0	DAC offset for Channel 1, State 0 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.2 DAC_CTRL_OFS01_CH1_1

Address: 0x000 0705
BANK0 Address: 0x5D

RW	7	6	5	4	3	2	1	0
								CH1_SEQ0_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH1_SEQ0_OFFSET_1	DAC offset for Channel 1, State 0 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.3 DAC_CTRL_OFS01_CH1_2

Address: 0x000 0706
BANK0 Address: 0x5E

RW	7	6	5	4	3	2	1	0
	CH1_SEQ1_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ1_OFFSET_0	DAC offset for Channel 1, State 1 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.4 DAC_CTRL_OFS01_CH1_3
Address: 0x000 0707
BANK0 Address: 0x5F

RW	7	6	5	4	3	2	1	0
								CH1_SEQ1_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH1_SEQ1_OFFSET_1	DAC offset for Channel 1, State 1 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.5 DAC_CTRL_OFS23_CH1_0
Address: 0x000 0708
BANK0 Address: 0x60

RW	7	6	5	4	3	2	1	0
								CH1_SEQ2_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ2_OFFSET_0	DAC offset for Channel 1, State 2 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.6 DAC_CTRL_OFS23_CH1_1
Address: 0x000 0709
BANK0 Address: 0x61

RW	7	6	5	4	3	2	1	0
								CH1_SEQ2_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH1_SEQ2_OFFSET_1	DAC offset for Channel 1, State 2 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.7 DAC_CTRL_OFS23_CH1_2
Address: 0x000 070A
BANK0 Address: 0x62

RW	7	6	5	4	3	2	1	0
								CH1_SEQ3_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ3_OFFSET_0	DAC offset for Channel 1, State 3 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.8 DAC_CTRL_OFS23_CH1_3
Address: 0x000 070B
BANK0 Address: 0x63

RW	7	6	5	4	3	2	1	0
								CH1_SEQ3_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH1_SEQ3_OFFSET_1	DAC offset for Channel 1, State 3 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.9 DAC_CTRL_OFS0_CH2_3_0
Address: 0x000 070C
BANK0 Address: 0x64

RW	7	6	5	4	3	2	1	0
	CH2_SEQ0_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ0_OFFSET_0	DAC offset for Channel 2, State 0 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.10 DAC_CTRL_OFS0_CH2_3_1
Address: 0x000 070D
BANK0 Address: 0x65

RW	7	6	5	4	3	2	1	0
								CH2_SEQ0_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH2_SEQ0_OFFSET_1	DAC offset for Channel 2, State 0 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.11 DAC_CTRL_OFS0_CH2_3_2
Address: 0x000 070E
BANK0 Address: 0x66

RW	7	6	5	4	3	2	1	0
	CH3_SEQ0_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ0_OFFSET_0	DAC offset for Channel 3, State 0 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.12 DAC_CTRL_OFS0_CH2_3_3
Address: 0x000 070F
BANK0 Address: 0x67

RW	7	6	5	4	3	2	1	0
								CH3_SEQ0_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH3_SEQ0_OFFSET_1	DAC offset for Channel 3, State 0 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.13 DAC_CTRL_OFS0_CH4_5_0
Address: 0x000 0710
BANK0 Address: 0x68

RW	7	6	5	4	3	2	1	0
	CH4_SEQ0_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ0_OFFSET_0	DAC offset for Channel 4, State 0 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.14 DAC_CTRL_OFS0_CH4_5_1
Address: 0x000 0711
BANK0 Address: 0x69

RW	7	6	5	4	3	2	1	0
								CH4_SEQ0_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH4_SEQ0_OFFSET_1	DAC offset for Channel 4, State 0 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.15 DAC_CTRL_OFS1_CH2_2
Address: 0x000 071A
BANK1 Address: 0x0E

RW	7	6	5	4	3	2	1	0
	CH2_SEQ1_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ1_OFFSET_0	DAC offset for Channel 2, State 1 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.16 DAC_CTRL_OFS1_CH2_3
Address: 0x000 071B
BANK1 Address: 0x0F

RW	7	6	5	4	3	2	1	0
								CH2_SEQ1_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH2_SEQ1_OFFSET_1	DAC offset for Channel 2, State 1 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.17 DAC_CTRL_OFS1_CH3_2
Address: 0x000 071E
BANK1 Address: 0x12

RW	7	6	5	4	3	2	1	0
	CH3_SEQ1_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ1_OFFSET_0	DAC offset for Channel 3, State 1 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.18 DAC_CTRL_OFS1_CH3_3
Address: 0x000 071F
BANK1 Address: 0x13

RW	7	6	5	4	3	2	1	0
								CH3_SEQ1_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH3_SEQ1_OFFSET_1	DAC offset for Channel 3, State 1 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.19 DAC_CTRL_OFS1_CH4_2
Address: 0x000 0722
BANK1 Address: 0x16

RW	7	6	5	4	3	2	1	0
	CH4_SEQ1_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ1_OFFSET_0	DAC offset for Channel 4, State 1 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.20 DAC_CTRL_OFS1_CH4_3
Address: 0x000 0723
BANK1 Address: 0x17

RW	7	6	5	4	3	2	1	0
								CH4_SEQ1_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH4_SEQ1_OFFSET_1	DAC offset for Channel 4, State 1 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.21 DAC_CTRL_OFS23_CH2_0
Address: 0x000 072C
BANK1 Address: 0x20

RW	7	6	5	4	3	2	1	0
								CH2_SEQ2_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ2_OFFSET_0	DAC offset for Channel 2, State 2 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.22 DAC_CTRL_OFS23_CH2_1
Address: 0x000 072D
BANK1 Address: 0x21

RW	7	6	5	4	3	2	1	0
								CH2_SEQ2_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH2_SEQ2_OFFSET_1	DAC offset for Channel 2, State 2 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.23 DAC_CTRL_OFS23_CH2_2
Address: 0x000 072E
BANK1 Address: 0x22

RW	7	6	5	4	3	2	1	0
								CH2_SEQ3_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ3_OFFSET_0	DAC offset for Channel 2, State 3 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.24 DAC_CTRL_OFS23_CH2_3
Address: 0x000 072F
BANK1 Address: 0x23

RW	7	6	5	4	3	2	1	0
								CH2_SEQ3_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH2_SEQ3_OFFSET_1	DAC offset for Channel 2, State 3 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.25 DAC_CTRL_OFS23_CH3_0
Address: 0x000 0730
BANK1 Address: 0x24

RW	7	6	5	4	3	2	1	0
								CH3_SEQ2_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ2_OFFSET_0	DAC offset for Channel 3, State 2 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.26 DAC_CTRL_OFS23_CH3_1
Address: 0x000 0731
BANK1 Address: 0x25

RW	7	6	5	4	3	2	1	0
								CH3_SEQ2_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH3_SEQ2_OFFSET_1	DAC offset for Channel 3, State 2 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.27 DAC_CTRL_OFS23_CH3_2
Address: 0x000 0732
BANK1 Address: 0x26

RW	7	6	5	4	3	2	1	0
								CH3_SEQ3_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ3_OFFSET_0	DAC offset for Channel 3, State 3 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.28 DAC_CTRL_OFS23_CH3_3
Address: 0x000 0733
BANK1 Address: 0x27

RW	7	6	5	4	3	2	1	0
								CH3_SEQ3_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH3_SEQ3_OFFSET_1	DAC offset for Channel 3, State 3 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.29 DAC_CTRL_OFS23_CH4_0
Address: 0x000 0734
BANK1 Address: 0x28

RW	7	6	5	4	3	2	1	0
								CH4_SEQ2_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ2_OFFSET_0	DAC offset for Channel 4, State 2 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.30 DAC_CTRL_OFS23_CH4_1
Address: 0x000 0735
BANK1 Address: 0x29

RW	7	6	5	4	3	2	1	0
								CH4_SEQ2_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH4_SEQ2_OFFSET_1	DAC offset for Channel 4, State 2 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.31 DAC_CTRL_OFS23_CH4_2
Address: 0x000 0736
BANK1 Address: 0x2A

RW	7	6	5	4	3	2	1	0
								CH4_SEQ3_OFFSET_0
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ3_OFFSET_0	DAC offset for Channel 4, State 3 This field contains bits [7:0] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.8.32 DAC_CTRL_OFS23_CH4_3
Address: 0x000 0737
BANK1 Address: 0x2B

RW	7	6	5	4	3	2	1	0
	—							CH4_SEQ3_OFFSET_1
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:1	—	Reserved
0	CH4_SEQ3_OFFSET_1	DAC offset for Channel 4, State 3 This field contains bit [8] of the 9-bit code. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.9 PGA_CTRL—PGA_CTRL
8.9.1 PGA_CTRL_AGAIN_CH1_0
Address: 0x000 0804
BANK0 Address: 0x74

RW	7	6	5	4	3	2	1	0
	—		CH1_SEQ0_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH1_SEQ0_AGAIN	Analog gain for Channel 1, State 0 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.2 PGA_CTRL_AGAIN_CH1_1
Address: 0x000 0805
BANK0 Address: 0x75

RW	7	6	5	4	3	2	1	0
	—		CH1_SEQ1_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH1_SEQ1_AGAIN	Analog gain for Channel 1, State 1 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.3 PGA_CTRL_AGAIN_CH1_2
Address: 0x000 0806
BANK0 Address: 0x76

RW	7	6	5	4	3	2	1	0
	—		CH1_SEQ2_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH1_SEQ2_AGAIN	Analog gain for Channel 1, State 2 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.4 PGA_CTRL_AGAIN_CH1_3
Address: 0x000 0807
BANK0 Address: 0x77

RW	7	6	5	4	3	2	1	0
	—		CH1_SEQ3_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH1_SEQ3_AGAIN	Analog gain for Channel 1, State 3 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.5 PGA_CTRL_AGAIN_CH2_0
Address: 0x000 0808
BANK0 Address: 0x78

RW	7	6	5	4	3	2	1	0
	—		CH2_SEQ0_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH2_SEQ0_AGAIN	Analog gain for Channel 2, State 0 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.6 PGA_CTRL_AGAIN_CH3_0
Address: 0x000 0809
BANK0 Address: 0x79

RW	7	6	5	4	3	2	1	0
	—		CH3_SEQ0_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH3_SEQ0_AGAIN	Analog gain for Channel 3, State 0 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.7 PGA_CTRL_AGAIN_CH4_0
Address: 0x000 080A
BANK0 Address: 0x7A

RW	7	6	5	4	3	2	1	0
	—		CH4_SEQ0_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH4_SEQ0_AGAIN	Analog gain for Channel 4, State 0 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.8 PGA_CTRL_AGAIN_CH2_1
Address: 0x000 0811
BANK1 Address: 0x35

RW	7	6	5	4	3	2	1	0
	—		CH2_SEQ1_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH2_SEQ1_AGAIN	Analog gain for Channel 2, State 1 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.9 PGA_CTRL_AGAIN_CH2_2
Address: 0x000 0812
BANK1 Address: 0x36

RW	7	6	5	4	3	2	1	0
	—		CH2_SEQ2_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH2_SEQ2_AGAIN	Analog gain for Channel 2, State 2 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.10 PGA_CTRL_AGAIN_CH2_3
Address: 0x000 0813
BANK1 Address: 0x37

RW	7	6	5	4	3	2	1	0
	—		CH2_SEQ3_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH2_SEQ3_AGAIN	Analog gain for Channel 2, State 3 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.11 PGA_CTRL_AGAIN_CH3_1
Address: 0x000 0815
BANK1 Address: 0x39

RW	7	6	5	4	3	2	1	0
	—		CH3_SEQ1_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH3_SEQ1_AGAIN	Analog gain for Channel 3, State 1 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.12 PGA_CTRL_AGAIN_CH3_2
Address: 0x000 0816
BANK1 Address: 0x3A

RW	7	6	5	4	3	2	1	0
	—		CH3_SEQ2_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH3_SEQ2_AGAIN	Analog gain for Channel 3, State 2 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.13 PGA_CTRL_AGAIN_CH3_3
Address: 0x000 0817
BANK1 Address: 0x3B

RW	7	6	5	4	3	2	1	0
	—		CH3_SEQ3_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH3_SEQ3_AGAIN	Analog gain for Channel 3, State 3 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.14 PGA_CTRL_AGAIN_CH4_1
Address: 0x000 0819
BANK1 Address: 0x3D

RW	7	6	5	4	3	2	1	0
	—		CH4_SEQ1_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH4_SEQ1_AGAIN	Analog gain for Channel 4, State 1 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.15 PGA_CTRL_AGAIN_CH4_2
Address: 0x000 081A
BANK1 Address: 0x3E

RW	7	6	5	4	3	2	1	0
	—		CH4_SEQ2_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH4_SEQ2_AGAIN	Analog gain for Channel 4, State 2 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.9.16 PGA_CTRL_AGAIN_CH4_3
Address: 0x000 081B
BANK1 Address: 0x3F

RW	7	6	5	4	3	2	1	0
	—		CH4_SEQ3_AGAIN					
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5:0	CH4_SEQ3_AGAIN	Analog gain for Channel 4, State 3 0x00 = (Default) 1.0 V/V 0x01 = 1.125 V/V ... 0x1F = 4.875 V/V 0x20 = 5.0 V/V 0x21 = 5.25 V/V ... 0x33 = 9.75 V/V 0x34–0x3F = 9.75 V/V

8.10 BLC_CTRL—BLC_CTRL
8.10.1 BLC_CTRL1_0
Address: 0x000 0900
BANK1 Address: 0x48

RW	7	6	5	4	3	2	1	0
	—	BLC_FINE_EVERYLINE	BLC_FINE_ACCUM	BLC_FINE_EN	—	BLC_COARSE_CYCLES		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	—	Reserved
6	BLC_FINE_EVERYLINE	Enables BLC fine adjust on every line 0 = (Default) Fine adjust on the first line of a frame only 1 = Fine adjust on every line
5	BLC_FINE_ACCUM	Selects whether the fine adjust result is accumulated over multiple lines 0 = (Default) Fine adjust is recalculated for each line 1 = Fine adjust is accumulated over multiple lines
4	BLC_FINE_EN	Enables the BLC fine adjustment 0 = (Default) Disabled 1 = Enabled
3	—	Reserved
2:0	BLC_COARSE_CYCLES	Selects the number of BLC course adjust iterations 000 = (Default) 0 iteration 001 = 1 iteration ... 111 = 7 iteration

8.10.2 BLC_CTRL1_1
Address: 0x000 0901
BANK1 Address: 0x49

	7	6	5	4	3	2	1	0
	BLC_TRACKING					—	BLC_FRAME_START	
Access	RW					—	WO	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	BLC_TRACKING	Configures DC tracking for BLC. 0000 = Worst DC tracking, best noise suppression 0001 ... 1110 1111 = Best DC tracking, worst noise suppression
3:1	—	Reserved
0	BLC_FRAME_START	Setting this bit indicates the next start-of-line is the first line in a frame. This bit is automatically cleared at the end of the BLC operation on the first line. 0 = (Default) Null 1 = Frame Start

8.10.3 BLC_CTRL1_2
Address: 0x000 0902
BANK1 Address: 0x4A

RW	7	6	5	4	3	2	1	0
	BLC_LENGTH_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	BLC_LENGTH_0	Number of pixels available for BLC (coarse and/or fine adjust calibration), valid from 18..1023. This field contains bits [7:0] of the 10-bit code.

8.10.4 BLC_CTRL1_3
Address: 0x000 0903
BANK1 Address: 0x4B

RW	7	6	5	4	3	2	1	0
				BLC_TARGET_RANGE	—		BLC_LENGTH_1	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4	BLC_TARGET_RANGE	Select BLC target range 0 = (Default) Normal range (0-63 in 10-bit output format) 1 = Extended range (0-255 in 10-bit output format)
3:2	—	Reserved
1:0	BLC_LENGTH_1	Number of pixels available for BLC (coarse and/or fine adjust calibration), valid from 18..1023. This field contains bits [9:8] of the 10-bit code.

8.10.5 BLC_TARGET_CH1_0
Address: 0x000 0908
BANK1 Address: 0x50

RW	7	6	5	4	3	2	1	0
	CH1_SEQ0_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ0_BLC_TARGET	BLC target level for Channel 1, State 0

8.10.6 BLC_TARGET_CH1_1
Address: 0x000 0909
BANK1 Address: 0x51

RW	7	6	5	4	3	2	1	0
	CH1_SEQ1_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ1_BLC_TARGET	BLC target level for Channel 1, State 1

8.10.7 BLC_TARGET_CH1_2
Address: 0x000 090A
BANK1 Address: 0x52

RW	7	6	5	4	3	2	1	0
	CH1_SEQ2_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ2_BLC_TARGET	BLC target level for Channel 1, State 2

8.10.8 BLC_TARGET_CH1_3
Address: 0x000 090B
BANK1 Address: 0x53

RW	7	6	5	4	3	2	1	0
	CH1_SEQ3_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ3_BLC_TARGET	BLC target level for Channel 1, State 3

8.10.9 BLC_TARGET_CH2_0
Address: 0x000 090C
BANK1 Address: 0x54

RW	7	6	5	4	3	2	1	0
	CH2_SEQ0_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ0_BLC_TARGET	BLC target level for Channel 2, State 0

8.10.10 BLC_TARGET_CH2_1
Address: 0x000 090D
BANK1 Address: 0x55

RW	7	6	5	4	3	2	1	0
	CH2_SEQ1_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ1_BLC_TARGET	BLC target level for Channel 2, State 1

8.10.11 BLC_TARGET_CH2_2
Address: 0x000 090E
BANK1 Address: 0x56

RW	7	6	5	4	3	2	1	0
	CH2_SEQ2_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ2_BLC_TARGET	BLC target level for Channel 2, State 2

8.10.12 BLC_TARGET_CH2_3
Address: 0x000 090F
BANK1 Address: 0x57

RW	7	6	5	4	3	2	1	0
	CH2_SEQ3_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ3_BLC_TARGET	BLC target level for Channel 2, State 3

8.10.13 BLC_TARGET_CH3_0
Address: 0x000 0910
BANK1 Address: 0x58

RW	7	6	5	4	3	2	1	0
	CH3_SEQ0_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ0_BLC_TARGET	BLC target level for Channel 3, State 0

8.10.14 BLC_TARGET_CH3_1
Address: 0x000 0911
BANK1 Address: 0x59

RW	7	6	5	4	3	2	1	0
	CH3_SEQ1_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ1_BLC_TARGET	BLC target level for Channel 3, State 1

8.10.15 BLC_TARGET_CH3_2
Address: 0x000 0912
BANK1 Address: 0x5A

RW	7	6	5	4	3	2	1	0
	CH3_SEQ2_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ2_BLC_TARGET	BLC target level for Channel 3, State 2

8.10.16 BLC_TARGET_CH3_3
Address: 0x000 0913
BANK1 Address: 0x5B

RW	7	6	5	4	3	2	1	0
	CH3_SEQ3_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ3_BLC_TARGET	BLC target level for Channel 3, State 3

8.10.17 BLC_TARGET_CH4_0
Address: 0x000 0914
BANK1 Address: 0x5C

RW	7	6	5	4	3	2	1	0
	CH4_SEQ0_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ0_BLC_TARGET	BLC target level for Channel 4, State 0

8.10.18 BLC_TARGET_CH4_1
Address: 0x000 0915
BANK1 Address: 0x5D

RW	7	6	5	4	3	2	1	0
	CH4_SEQ1_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ1_BLC_TARGET	BLC target level for Channel 4, State 1

8.10.19 BLC_TARGET_CH4_2
Address: 0x000 0916
BANK1 Address: 0x5E

RW	7	6	5	4	3	2	1	0
	CH4_SEQ2_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ2_BLC_TARGET	BLC target level for Channel 4, State 2

8.10.20 BLC_TARGET_CH4_3
Address: 0x000 0917
BANK1 Address: 0x5F

RW	7	6	5	4	3	2	1	0
	CH4_SEQ3_BLC_TARGET							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ3_BLC_TARGET	BLC target level for Channel 4, State 3

8.10.21 BLC_OFFSET_CH1_0
Address: 0x000 0928

RO	7	6	5	4	3	2	1	0
	CH1_BLC_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_BLC_OFFSET_0	BLC offset level for Channel 1 This field contains bits [7:0] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.22 BLC_OFFSET_CH1_1
Address: 0x000 0929

RO	7	6	5	4	3	2	1	0
								CH1_BLC_OFFSET_1
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:1	—	Reserved
0	CH1_BLC_OFFSET_1	BLC offset level for Channel 1 This field contains bit [8] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.23 BLC_OFFSET_CH2_0
Address: 0x000 092C

RO	7	6	5	4	3	2	1	0
	CH2_BLC_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_BLC_OFFSET_0	BLC offset level for Channel 2 This field contains bits [7:0] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.24 BLC_OFFSET_CH2_1
Address: 0x000 092D

RO	7	6	5	4	3	2	1	0
								CH2_BLC_OFFSET_1
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:1	—	Reserved
0	CH2_BLC_OFFSET_1	BLC offset level for Channel 2 This field contains bit [8] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.25 BLC_OFFSET_CH3_0
Address: 0x000 0930

RO	7	6	5	4	3	2	1	0
	CH3_BLC_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_BLC_OFFSET_0	BLC offset level for Channel 3 This field contains bits [7:0] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.26 BLC_OFFSET_CH3_1
Address: 0x000 0931

RO	7	6	5	4	3	2	1	0
								CH3_BLC_OFFSET_1
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:1	—	Reserved
0	CH3_BLC_OFFSET_1	BLC offset level for Channel 3 This field contains bit [8] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.27 BLC_OFFSET_CH4_0
Address: 0x000 0934

RO	7	6	5	4	3	2	1	0
	CH4_BLC_OFFSET_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_BLC_OFFSET_0	BLC offset level for Channel 4 This field contains bits [7:0] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.10.28 BLC_OFFSET_CH4_1
Address: 0x000 0935

RO	7	6	5	4	3	2	1	0
								CH4_BLC_OFFSET_1
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:1	—	Reserved
0	CH4_BLC_OFFSET_1	BLC offset level for Channel 4 This field contains bit [8] of the 9-bit code. Not valid during the first line in the BLC frame. 0 = -333 mV 256 = 0 mV 511 = 331.7 mV

8.11 SARADC_1—SARADC_1
8.11.1 SAR1_CTRL_1
Address: 0x000 0A01
BANK1 Address: 0x69

RW	7	6	5	4	3	2	1	0
						CH1_POL	—	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:3	—	Reserved
2	CH1_POL	Signal polarity selection 0 = (Default) Positive signalling (CIS waveform) 1 = Negative signalling (CCD waveform)
1:0	—	Reserved

8.11.2 SAR1_CTRL_3
Address: 0x000 0A03
BANK1 Address: 0x6B

RW	7	6	5	4	3	2	1	0
						CH1_AFE_POWER		
Default	0	0	0	0	0	0	1	1

Bits	Name	Description
7:2	—	Reserved
1:0	CH1_AFE_POWER	AFE power mode selection. 00 = Low Power 01–10 = Reserved 11 = (Default) High Performance

8.12 SARADC_2—SARADC_2
8.12.1 SAR2_CTRL_1
Address: 0x000 0B01
BANK1 Address: 0x6D

RW	7	6	5	4	3	2	1	0
						CH2_POL	—	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:3	—	Reserved
2	CH2_POL	Signal polarity selection 0 = (Default) Positive signalling (CIS waveform) 1 = Negative signalling (CCD waveform)
1:0	—	Reserved

8.12.2 SAR2_CTRL_3
Address: 0x000 0B03
BANK1 Address: 0x6F

RW	7	6	5	4	3	2	1	0
							CH2_AFE_POWER	
Default	0	0	0	0	0	0	1	1

Bits	Name	Description
7:2	—	Reserved
1:0	CH2_AFE_POWER	AFE power mode selection. 00 = Low Power 01–10 = Reserved 11 = (Default) High Performance

8.13 SARADC_3—SARADC_3
8.13.1 SAR3_CTRL_1
Address: 0x000 0C01
BANK1 Address: 0x71

RW	7	6	5	4	3	2	1	0
						CH3_POL	—	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:3	—	Reserved
2	CH3_POL	Signal polarity selection 0 = (Default) Positive signalling (CIS waveform) 1 = Negative signalling (CCD waveform)
1:0	—	Reserved

8.13.2 SAR3_CTRL_3
Address: 0x000 0C03
BANK1 Address: 0x73

RW	7	6	5	4	3	2	1	0
							CH3_AFE_POWER	
Default	0	0	0	0	0	0	1	1

Bits	Name	Description
7:2	—	Reserved
1:0	CH3_AFE_POWER	AFE power mode selection. 00 = Low Power 01–10 = Reserved 11 = (Default) High Performance

8.14 SARADC_4—SARADC_4
8.14.1 SAR4_CTRL_1
Address: 0x000 0D01
BANK1 Address: 0x75

RW	7	6	5	4	3	2	1	0
						CH4_POL	—	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:3	—	Reserved
2	CH4_POL	Signal polarity selection 0 = (Default) Positive signalling (CIS waveform) 1 = Negative signalling (CCD waveform)
1:0	—	Reserved

8.14.2 SAR4_CTRL_3
Address: 0x000 0D03
BANK1 Address: 0x77

RW	7	6	5	4	3	2	1	0
	—						CH4_AFE_POWER	
Default	0	0	0	0	0	0	1	1

Bits	Name	Description
7:2	—	Reserved
1:0	CH4_AFE_POWER	AFE power mode selection. 00 = Low Power 01–10 = Reserved 11 = (Default) High Performance

8.15 AGC_TOP—Digital Gain Control
8.15.1 DGAIN_SEQ01_CH1_0
Address: 0x000 108C
BANK7 Address: 0x0C

RW	7	6	5	4	3	2	1	0
	CH1_SEQ0_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ0_DGAIN_0	Digital gain for Channel 1, State 0 Gain = [DGAIN/2048]. Valid from 1024 to 4095. This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.2 DGAIN_SEQ01_CH1_1
Address: 0x000 108D
BANK7 Address: 0x0D

RW	7	6	5	4	3	2	1	0
	—						CH1_SEQ0_DGAIN_1	
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH1_SEQ0_DGAIN_1	Digital gain for Channel 1, State 0 Gain = [DGAIN/2048]. Valid from 1024 to 4095. This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.3 DGAIN_SEQ01_CH1_2
Address: 0x000 108E
BANK7 Address: 0x0E

RW	7	6	5	4	3	2	1	0
	CH1_SEQ1_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ1_DGAIN_0	Digital gain for Channel 1, State 1 Gain = [DGAIN/2048]. Valid from 1024 to 4095. This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.4 DGAIN_SEQ01_CH1_3
Address: 0x000 108F
BANK7 Address: 0x0F

RW	7	6	5	4	3	2	1	0
		—			CH1_SEQ1_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH1_SEQ1_DGAIN_1	Digital gain for Channel 1, State 1 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.5 DGAIN_SEQ23_CH1_0
Address: 0x000 1090
BANK7 Address: 0x10

RW	7	6	5	4	3	2	1	0
	CH1_SEQ2_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ2_DGAIN_0	Digital gain for Channel 1, State 2 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.6 DGAIN_SEQ23_CH1_1
Address: 0x000 1091
BANK7 Address: 0x11

RW	7	6	5	4	3	2	1	0
		—			CH1_SEQ2_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH1_SEQ2_DGAIN_1	Digital gain for Channel 1, State 2 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.7 DGAIN_SEQ23_CH1_2
Address: 0x000 1092
BANK7 Address: 0x12

RW	7	6	5	4	3	2	1	0
	CH1_SEQ3_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH1_SEQ3_DGAIN_0	Digital gain for Channel 1, State 3 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.8 DGAIN_SEQ23_CH1_3
Address: 0x000 1093
BANK7 Address: 0x13

RW	7	6	5	4	3	2	1	0
	—				CH1_SEQ3_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH1_SEQ3_DGAIN_1	Digital gain for Channel 1, State 3 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.9 DGAIN_SEQ01_CH2_0
Address: 0x000 1094
BANK7 Address: 0x14

RW	7	6	5	4	3	2	1	0
	CH2_SEQ0_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ0_DGAIN_0	Digital gain for Channel 2, State 0 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.10 DGAIN_SEQ01_CH2_1
Address: 0x000 1095
BANK7 Address: 0x15

RW	7	6	5	4	3	2	1	0
	—				CH2_SEQ0_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH2_SEQ0_DGAIN_1	Digital gain for Channel 2, State 0 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.11 DGAIN_SEQ01_CH2_2
Address: 0x000 1096
BANK7 Address: 0x16

RW	7	6	5	4	3	2	1	0
	CH2_SEQ1_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ1_DGAIN_0	Digital gain for Channel 2, State 1 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.12 DGAIN_SEQ01_CH2_3
Address: 0x000 1097
BANK7 Address: 0x17

RW	7	6	5	4	3	2	1	0
	—				CH2_SEQ1_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH2_SEQ1_DGAIN_1	Digital gain for Channel 2, State 1 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.13 DGAIN_SEQ23_CH2_0
Address: 0x000 1098
BANK7 Address: 0x18

RW	7	6	5	4	3	2	1	0
	CH2_SEQ2_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ2_DGAIN_0	Digital gain for Channel 2, State 2 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.14 DGAIN_SEQ23_CH2_1
Address: 0x000 1099
BANK7 Address: 0x19

RW	7	6	5	4	3	2	1	0
	—				CH2_SEQ2_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH2_SEQ2_DGAIN_1	Digital gain for Channel 2, State 2 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.15 DGAIN_SEQ23_CH2_2
Address: 0x000 109A
BANK7 Address: 0x1A

RW	7	6	5	4	3	2	1	0
	CH2_SEQ3_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH2_SEQ3_DGAIN_0	Digital gain for Channel 2, State 3 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.16 DGAIN_SEQ23_CH2_3
Address: 0x000 109B
BANK7 Address: 0x1B

RW	7	6	5	4	3	2	1	0
	—				CH2_SEQ3_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH2_SEQ3_DGAIN_1	Digital gain for Channel 2, State 3 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.17 DGAIN_SEQ01_CH3_0
Address: 0x000 109C
BANK7 Address: 0x1C

RW	7	6	5	4	3	2	1	0
	CH3_SEQ0_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ0_DGAIN_0	Digital gain for Channel 3, State 0 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.18 DGAIN_SEQ01_CH3_1
Address: 0x000 109D
BANK7 Address: 0x1D

RW	7	6	5	4	3	2	1	0
	—				CH3_SEQ0_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH3_SEQ0_DGAIN_1	Digital gain for Channel 3, State 0 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.19 DGAIN_SEQ01_CH3_2
Address: 0x000 109E
BANK7 Address: 0x1E

RW	7	6	5	4	3	2	1	0
	CH3_SEQ1_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ1_DGAIN_0	Digital gain for Channel 3, State 1 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.20 DGAIN_SEQ01_CH3_3
Address: 0x000 109F
BANK7 Address: 0x1F

RW	7	6	5	4	3	2	1	0
	—				CH3_SEQ1_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH3_SEQ1_DGAIN_1	Digital gain for Channel 3, State 1 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.21 DGAIN_SEQ23_CH3_0
Address: 0x000 10A0
BANK7 Address: 0x20

RW	7	6	5	4	3	2	1	0
	CH3_SEQ2_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ2_DGAIN_0	Digital gain for Channel 3, State 2 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.22 DGAIN_SEQ23_CH3_1
Address: 0x000 10A1
BANK7 Address: 0x21

RW	7	6	5	4	3	2	1	0
	—				CH3_SEQ2_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH3_SEQ2_DGAIN_1	Digital gain for Channel 3, State 2 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.23 DGAIN_SEQ23_CH3_2
Address: 0x000 10A2
BANK7 Address: 0x22

RW	7	6	5	4	3	2	1	0
	CH3_SEQ3_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH3_SEQ3_DGAIN_0	Digital gain for Channel 3, State 3 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.24 DGAIN_SEQ23_CH3_3
Address: 0x000 10A3
BANK7 Address: 0x23

RW	7	6	5	4	3	2	1	0
	—				CH3_SEQ3_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH3_SEQ3_DGAIN_1	Digital gain for Channel 3, State 3 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.25 DGAIN_SEQ01_CH4_0
Address: 0x000 10A4
BANK7 Address: 0x24

RW	7	6	5	4	3	2	1	0
	CH4_SEQ0_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ0_DGAIN_0	Digital gain for Channel 4, State 0 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.26 DGAIN_SEQ01_CH4_1
Address: 0x000 10A5
BANK7 Address: 0x25

RW	7	6	5	4	3	2	1	0
	—				CH4_SEQ0_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH4_SEQ0_DGAIN_1	Digital gain for Channel 4, State 0 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.27 DGAIN_SEQ01_CH4_2
Address: 0x000 10A6
BANK7 Address: 0x26

RW	7	6	5	4	3	2	1	0
	CH4_SEQ1_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ1_DGAIN_0	Digital gain for Channel 4, State 1 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.28 DGAIN_SEQ01_CH4_3
Address: 0x000 10A7
BANK7 Address: 0x27

RW	7	6	5	4	3	2	1	0
	—				CH4_SEQ1_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH4_SEQ1_DGAIN_1	Digital gain for Channel 4, State 1 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.29 DGAIN_SEQ23_CH4_0
Address: 0x000 10A8
BANK7 Address: 0x28

RW	7	6	5	4	3	2	1	0
	CH4_SEQ2_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ2_DGAIN_0	Digital gain for Channel 4, State 2 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.30 DGAIN_SEQ23_CH4_1
Address: 0x000 10A9
BANK7 Address: 0x29

RW	7	6	5	4	3	2	1	0
	—				CH4_SEQ2_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH4_SEQ2_DGAIN_1	Digital gain for Channel 4, State 2 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.31 DGAIN_SEQ23_CH4_2
Address: 0x000 10AA
BANK7 Address: 0x2A

RW	7	6	5	4	3	2	1	0
	CH4_SEQ3_DGAIN_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	CH4_SEQ3_DGAIN_0	Digital gain for Channel 4, State 3 This field contains bits [7:0] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.15.32 DGAIN_SEQ23_CH4_3
Address: 0x000 10AB
BANK7 Address: 0x2B

RW	7	6	5	4	3	2	1	0
	—				CH4_SEQ3_DGAIN_1			
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	CH4_SEQ3_DGAIN_1	Digital gain for Channel 4, State 3 This field contains bits [11:8] of the 12-bit code. 1024 = 0.5 V/V 2048 = 1.0 V/V 3072 = 1.5 V/V 4095 = 1.9995 V/V

8.16 PAT_GEN—Test pattern generator
8.16.1 PGCONFIG_0
Address: 0x000 1100
BANK3 Address: 0x78

RW	7	6	5	4	3	2	1	0
	PGEN_MARCH	PGEN_PATT_SEL		PGEN_INV	—		PGEN_EN	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7	PGEN_MARCH	Pattern generator march enable. If this bit is set, the marching pattern overrides PGEN_PATT_SEL selection. 0 = (Default) No override 1 = March enabled
6:5	PGEN_PATT_SEL	Pattern generator select 00 = (Default) Constant level 01 = Vertical ramp 10 = Horizontal ramp 11 = Patch pattern
4	PGEN_INV	Pattern generator invert 0 = (Default) Non-inverted 1 = Inverted
3:1	—	Reserved
0	PGEN_EN	Pattern generator enable 0 = (Default) Disabled 1 = Enabled

8.16.2 PGCONFIG_2
Address: 0x000 1102
BANK3 Address: 0x7A

RW	7	6	5	4	3	2	1	0
	PGEN_LVL_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PGEN_LVL_0	Pattern generator intensity This field contains bits [7:0] of the 16-bit code, valid from 0-65535.

8.16.3 PGCONFIG_3
Address: 0x000 1103
BANK3 Address: 0x7B

RW	7	6	5	4	3	2	1	0
	PGEN_LVL_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PGEN_LVL_1	Pattern generator intensity This field contains bits [15:8] of the 16-bit code, valid from 0-65535.

8.16.4 PGWIDTH_0
Address: 0x000 1104
BANK3 Address: 0x7C

RW	7	6	5	4	3	2	1	0
	PGEN_WIDTH1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PGEN_WIDTH1	Pattern generator width1. Configures the dimensions of the vertical ramp, horizontal ramp, and patch pattern.

8.16.5 PGWIDTH_1
Address: 0x000 1105
BANK3 Address: 0x7D

RW	7	6	5	4	3	2	1	0
	PGEN_WIDTH2							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PGEN_WIDTH2	Pattern generator width2. Configures the dimensions of the patch pattern (gap between patches).

8.17 LED_CTRL—LED Control
8.17.1 LED_CTRL_CONFIG_0
Address: 0x000 1500
BANK6 Address: 0x48

RW	7	6	5	4	3	2	1	0
					LED_CTRL_SRC	LEDB_EN	LEDG_EN	LEDR_EN
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3	LED_CTRL_SRC	Select control source for LED drivers 0 = (Default) Internal (POn) 1 = External (HW pin)
2	LEDB_EN	LEDB driver control 0 = (Default) Disabled 1 = Enabled

Bits	Name	Description
1	LEDG_EN	LEDG driver control 0 = (Default) Disabled 1 = Enabled
0	LEDR_EN	LEDR driver control 0 = (Default) Disabled 1 = Enabled

8.17.2 LED_CTRL_CONFIG_1
Address: 0x000 1501
BANK6 Address: 0x49

RW	7	6	5	4	3	2	1	0
					LED_RAMP_TIME			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	—	Reserved
3:0	LED_RAMP_TIME	LED ramp time. Time taken to ramp fine current (LEDn_FINE) from 0-255. 0x0–0x7 = (Default) 8 us 0x8 = 9 us 0x9 = 10 us ... 0xF = 16 us

8.17.3 LED_CTRL_CONFIG_2
Address: 0x000 1502
BANK6 Address: 0x4A

RW	7	6	5	4	3	2	1	0
	LED_RAMP_BOOST		LEDB_COARSE		LEDG_COARSE		LEDR_COARSE	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	LED_RAMP_BOOST	LED ramp boost. Shortens the ramp time by a factor of 2 or 4. Boost by 2 is only valid if pixel sample rate >= 4MHz. Boost by 4 is only valid if pixel sample rate >= 12MHz and LED_RAMP_TIME >= 0xB. If an invalid selection is made, the boost is disabled and the unmodified LED_RAMP_TIME is used. 00 = (Default) No boost 01 = Boost by 2 10 = Boost by 4 11 = Reserved
5:4	LEDB_COARSE	LEDB coarse current control. This is the output current if LEDB_FINE=255. 00 = (Default) 33 mA 01 = 41 mA 10 = 49 mA 11 = 66 mA
3:2	LEDG_COARSE	LEDG coarse current control. This is the output current if LEDG_FINE=255. 00 = (Default) 33 mA 01 = 41 mA 10 = 49 mA 11 = 66 mA
1:0	LEDR_COARSE	LEDR coarse current control. This is the output current if LEDR_FINE=255. 00 = (Default) 33 mA 01 = 41 mA 10 = 49 mA 11 = 66 mA

8.17.4 LEDX_FINE_0
Address: 0x000 1504
BANK6 Address: 0x4C

RW	7	6	5	4	3	2	1	0
	LEDR_FINE							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	LEDR_FINE	LEDR fine current control. Selects the output current from 0 to LEDR_COARSE. If the LEDR output is enabled, the current ramps to (LEDR_FINE/255 * LEDR_COARSE)

8.17.5 LEDX_FINE_1
Address: 0x000 1505
BANK6 Address: 0x4D

RW	7	6	5	4	3	2	1	0
	LEDG_FINE							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	LEDG_FINE	LEDG fine current control. Selects the output current from 0 to LEDG_COARSE. If the LEDG output is enabled, the current ramps to (LEDG_FINE/255 * LEDG_COARSE)

8.17.6 LEDX_FINE_2
Address: 0x000 1506
BANK6 Address: 0x4E

RW	7	6	5	4	3	2	1	0
	LEDB_FINE							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	LEDB_FINE	LEDB fine current control. Selects the output current from 0 to LEDB_COARSE. If the LEDB output is enabled, the current ramps to (LEDB_FINE/255 * LEDB_COARSE)

8.17.7 LED_CTRL_STATUS
Address: 0x000 1508
BANK6 Address: 0x50

RO	7	6	5	4	3	2	1	0
				LED_MAX_CURRENT_ERR	LED_CTRL_SHORT_ERR			
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:5	—	Reserved
4	LED_MAX_CURRENT_ERR	Maximum current error. Indicates the sum of LEDR_COARSE, LEDG_COARSE, and LEDB_COARSE for the active LED channels exceeds 0b11. Only applies to active channels (enabled using LEDx_EN and by an asserted hardware pin or pulse waveform). If this bit is set, the fine current selections are restricted to a maximum of 45 mA. In most configurations, the error indicates a sum exceeding 135 mA. The combination of 33mA + 49mA + 49mA (total 131 mA) also triggers the maximum-current response. 0 = (Default) Normal 1 = Max current error
3	LED_CTRL_SHORT_ERR	Short circuit detection on LED control resistor. Indicates a short circuit in the ILED_CTRL external resistor. 0 = (Default) Normal 1 = Short detected
2:0	—	Reserved

8.18 DPLL1—DPLL1
8.18.1 DPLL1_DFLL_DIVIDER_CTRL_0
Address: 0x000 1700
BANK6 Address: 0x60

RW	7	6	5	4	3	2	1	0
	PLL1_OUTPUT1_DIV_0							—
Default	0	0	1	0	0	0	0	0

Bits	Name	Description
7:1	PLL1_OUTPUT1_DIV_0	Divider ratio for main output (ADC clock output). This field contains bits [6:0] of the 9-bit integer.
0	—	Reserved

8.18.2 DPLL1_DFLL_DIVIDER_CTRL_1
Address: 0x000 1701
BANK6 Address: 0x61

RW	7	6	5	4	3	2	1	0
	PLL1_VCO_RANGE				—		PLL1_OUTPUT1_DIV_1	
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:4	PLL1_VCO_RANGE	VCO frequency range 0x0 = (Default) 150-182 MHz 0x1 = 182-189 MHz 0x2 = 189-197 MHz 0x3 = 197-203 MHz 0x4 = 203-214 MHz 0x5 = 214-225 MHz 0x6 = 225-234 MHz 0x7 = 234-245 MHz 0x8 = 245-253 MHz 0x9 = 253-261 MHz 0xA = 261-269 MHz 0xB = 269-278 MHz 0xC = 278-285 MHz 0xD = 285-294 MHz 0xE = 294-298 MHz 0xF = 298-300 MHz
3:2	—	Reserved
1:0	PLL1_OUTPUT1_DIV_1	Divider ratio for main output (ADC clock output). This field contains bits [8:7] of the 9-bit integer.

8.18.3 DPLL1_DFLL_DIVIDER_CTRL_2
Address: 0x000 1702
BANK6 Address: 0x62

RW	7	6	5	4	3	2	1	0
	PLL1_OUTPUT2_DIV_0						PLL1_OUTPUT2_EN	
Default	0	0	1	0	0	0	0	0

Bits	Name	Description
7:1	PLL1_OUTPUT2_DIV_0	Divider ratio for secondary output (data output clock). This field contains bits [6:0] of the 9-bit integer.
0	PLL1_OUTPUT2_EN	PLL secondary output control (data output clock) 0 = (Default) Disabled 1 = Enabled

8.18.4 DPLL1_DFLL_DIVIDER_CTRL_3
Address: 0x000 1703
BANK6 Address: 0x63

RW	7	6	5	4	3	2	1	0
	PLL1_REFCLK_DIV_RATIO				PLL1_REFCLK_DIV_BYPASS	—	PLL1_OUTPUT2_DIV_1	
Default	0	0	0	0	1	0	0	0

Bits	Name	Description
7:4	PLL1_REFCLK_DIV_RATIO	MCLK input divider ratio 0x0 = (Default) Divide by 1 0x1 = Divide by 2 ... 0xF = Divide by 16
3	PLL1_REFCLK_DIV_BYPASS	MCLK input divider bypass 0 = Divider enabled 1 = (Default) Divider bypass
2	—	Reserved
1:0	PLL1_OUTPUT2_DIV_1	Divider ratio for secondary output (data output clock). This field contains bits [8:7] of the 9-bit integer.

8.18.5 DPLL1_DFLL_FEEDBACK_RATIO_0
Address: 0x000 1704
BANK6 Address: 0x64

RW	7	6	5	4	3	2	1	0
	PLL1_RATIO_0							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PLL1_RATIO_0	PLL frequency ratio. Sets the ratio of the VCO to the MCLK reference. 9 integer bits, 20 fractional bits. This field contains bits [7:0] of the 29-bit code.

8.18.6 DPLL1_DFLL_FEEDBACK_RATIO_1
Address: 0x000 1705
BANK6 Address: 0x65

RW	7	6	5	4	3	2	1	0
	PLL1_RATIO_1							
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:0	PLL1_RATIO_1	PLL frequency ratio. Sets the ratio of the VCO to the MCLK reference. 9 integer bits, 20 fractional bits. This field contains bits [15:8] of the 29-bit code.

8.18.7 DPLL1_DFLL_FEEDBACK_RATIO_2
Address: 0x000 1706
BANK6 Address: 0x66

RW	7	6	5	4	3	2	1	0
	PLL1_RATIO_2							
Default	0	0	0	1	0	0	0	0

Bits	Name	Description
7:0	PLL1_RATIO_2	PLL frequency ratio. Sets the ratio of the VCO to the MCLK reference. 9 integer bits, 20 fractional bits. This field contains bits [23:16] of the 29-bit code.

8.18.8 DPLL1_DFLL_FEEDBACK_RATIO_3
Address: 0x000 1707
BANK6 Address: 0x67

RW	7	6	5	4	3	2	1	0
	—		PLL1_MODE			PLL1_RATIO_3		
Default	0	0	0	0	0	0	0	0

Bits	Name	Description
7:6	—	Reserved
5	PLL1_MODE	PLL Mode select. In Integer Mode, only the integer bits of the PLL ratio are used. 0 = (Default) Fractional Mode 1 = Integer Mode
4:0	PLL1_RATIO_3	PLL frequency ratio. Sets the ratio of the VCO to the MCLK reference. 9 integer bits, 20 fractional bits. This field contains bits [28:24] of the 29-bit code.

8.18.9 DPLL1_DFLL_FEATURES_0
Address: 0x000 1708
BANK6 Address: 0x68

RW	7	6	5	4	3	2	1	0
	PLL1_VCO_GAIN				PLL1_CP_IBIAS		PLL1_PHASE_DET_PAUSE_EN	
Default	1	0	0	0	0	1	0	0

Bits	Name	Description
7:4	PLL1_VCO_GAIN	PLL VCO gain
3:1	PLL1_CP_IBIAS	PLL current bias
0	PLL1_PHASE_DET_PAUSE_EN	Phase detect control. If enabled, the phase detection is paused when MCLK phase change is indicated. 0 = (Default) Disabled 1 = Enabled

8.18.10 DPLL1_DFLL_FEATURES_1
Address: 0x000 1709
BANK6 Address: 0x69

RW	7	6	5	4	3	2	1	0
	—				PLL1_FILT			
Default	0	0	0	0	0	0	0	1

Bits	Name	Description
7:4	—	Reserved
3:0	PLL1_FILT	PLL loop filter cut-off frequency

9 Thermal Characteristics

Table 9-1. Typical JEDEC Four-Layer, 2s2p Board Thermal Characteristics

Parameter	Symbol	QFN	Units
Junction-to-ambient thermal resistance	θ_{JA}	29.73	$^{\circ}\text{C}/\text{W}$
Junction-to-board thermal resistance	θ_{JB}	16.88	$^{\circ}\text{C}/\text{W}$
Junction-to-case (top) thermal resistance	θ_{JC}	53.96	$^{\circ}\text{C}/\text{W}$
Junction-to-board thermal-characterization parameter	Ψ_{JB}	15.43	$^{\circ}\text{C}/\text{W}$
Junction-to-package-top thermal-characterization parameter	Ψ_{JT}	2.87	$^{\circ}\text{C}/\text{W}$

Notes:

- Natural convection at the maximum recommended operating temperature T_A (see Table 3-1)
- Four-layer, 2s2p PCB as specified by JESD51-9 and JESD51-11; dimensions: 101.5 x 114.5 x 1.6 mm
- Exposed pad is connected to the PCB ground layer through a 4 x 4 thermal via array; vias are 0.3 mm diameter, plated.
- Thermal parameters as defined by JESD51-12

10 Package Dimensions

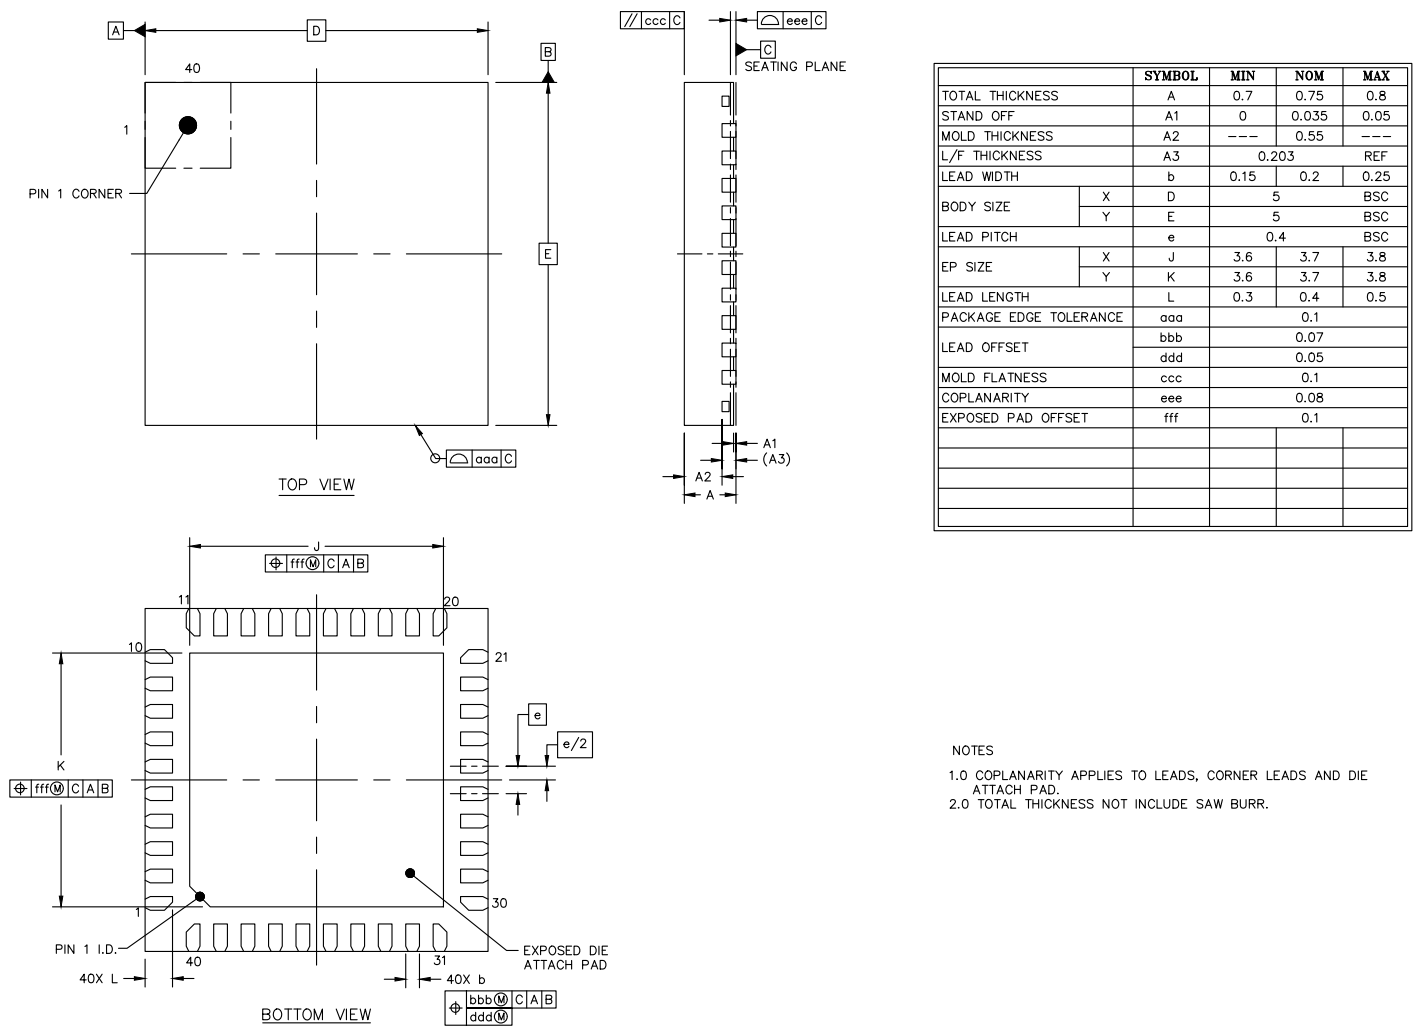
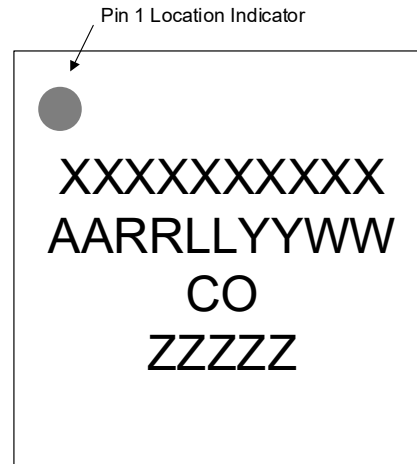


Figure 10-1. QFN 40-pin Package Drawing

11 Package Marking


Top Side Brand

Line 1: Part number
 Line 2: Package mark
 Line 3: Country of origin (CO)
 Line 4: Encoded wafer/device ID

Package Mark Fields

AA = Assembly site code
 RR = Device revision code
 LL = Lot sequence code
 YY = Year of manufacture
 WW = Work week of manufacture

Figure 11-1. Package Marking

12 Ordering Information

Table 12-1. Ordering Information

Product	Description	Package	RoHS Compliant	Grade	Temperature Range	Container	Orderable Part Number
CS82L44	Four-channel AFE with sensor timing generation and LVDS/CMOS data output	40-pin QFN	Yes	Commercial	-40 °C to +85 °C	Tape and Reel	CS82L44-DNR
						Tray	CS82L44-DN

13 Revision History

Table 13-1. Revision History

Revision	Changes
A1 MAY 2024	<ul style="list-style-type: none"> Initial version
A2 OCT 2024	<ul style="list-style-type: none"> Updated electrical specifications (Table 3-1, Table 3-3, Table 3-10, Table 3-16, Table 3-21) Clarification of VDD_A requirements (Section 4.1, Section 4.1.1) Added description of PLL1 control registers (Section 4.3.1.1) Added description of pattern generator (Section 4.4.11) Updated clocking requirements for CMOS (TG) output formats (Section 4.5.3) Added definition of TGSYNC/LEDSTART timing requirements (Section 4.7.3, Section 4.7.3.1) Added timing specifications for Shared Bus Mode (Section 4.10.2.3, Table 3-21) Updated definition of CLKOUT3_FN to support monitor functions (Section 4.11.1) Clarification of θ_{JC} definition (Section 9)

Table 13-1. Revision History (Cont.)

Revision	Changes
A3 JUN 2025	<ul style="list-style-type: none"> • Changed pin name to LDO_EN (Section 1.1, Section 1.2) • Updated typical connections drawing and associated notes (Section 2) • Updated electrical specifications (Section 3) • Updated LDO controls and power-supply configurations (Section 4.1, Section 4.1.1, Section 4.1.2, Section 4.1.3) • Updated definition of LDO5 variable current limit (Section 4.1.2) • Updated PLL2 and spread-spectrum functions (Section 4.3, Section 4.3.2) • Updated MCLK mask control (Section 4.3.3) • Added AFE power control option (Section 4.4.1) • Clarification of VBIAS control (Section 4.4.2) • Clarification and update to BLC function, including extended operational range (Section 4.4.10) • Additional control option for pattern generator (Section 4.4.11) • Added polarity control option for LVDS output (Section 4.5.2) • Updated output latency definition for External Modes (Section 4.6.2, Section 4.6.3) • Updated sequence-state control to allow any state to be initial state (Section 4.7.1, Section 4.7.2, Section 4.7.3) • Updated drawings to show default TGSYNC polarity (Section 4.7.3.1, Table 3-16) • Updated pulse-output (POn) functions, including 'direct control' option (Section 4.8.2, Section 4.8.2.2) • Updated LED maximum-current condition (Section 4.9) • Updated constraints on Shared Bus Mode (Section 4.10.2.3) • Added comment on propagation delay for monitor functions (Section 4.12) • Added description of digital output code calculation (Section 5.2)
A4 SEP 2025	<ul style="list-style-type: none"> • Updated electrical specifications (Section 3) • Updated guidance when using common supply for sensor and VDD_IO (Section 4.1.3.3) • Updated definition for functions linked to pixel counter (Section 4.4.3, Section 4.4.10, Section 4.5.1, Section 4.8.2.1, Section 4.8.4) • Updated definition of LVDS_BIT_ORDER control field (Section 4.5.2) • Updated definition of clock output enable and invert functions (Section 4.8.5) • Updated control port definition—mode is configured after power-up only, not after reset (Section 4.10) • Corrected output-code calculation and example (Section 5.2, Section 5.2.2) • Updated ordering information (Section 12)
A5 JAN 2026	<ul style="list-style-type: none"> • Electrical specifications updated (Table 3-3, Table 3-4, Table 3-7, Table 3-8, Table 3-10, Table 3-11, Table 3-12, Table 3-14, Table 3-15) • Described additional use cases for LDO_EN pin (Section 4.1.3.1) • Clarification of MCLK mask description (Section 4.3.3) • Updated guidance and control sequence for dual power-supply configuration (Section 4.1.3.1) • Added CHx_BLC_OFFSET field and updated definition of how to disable BLC (Section 4.4.10) • Added output latency specification for pattern generator (Section 4.4.11) • Added clarification of Flag Pixel timing/latency (Section 4.5.1) • Added output latency specification for TG Mode (Section 4.6.1) • Updated sequence-state illustrations, showing State 2 (example) as the initial state (Section 4.7.2, Section 4.7.3) • Updated TGSYNC and LEDSTART timing requirements (Section 4.7.3.1) • Updated definition of high-speed clock (C_CK) divider (Section 4.8.4.1) • Updated LED maximum-current specification, removed overcurrent status bits (Section 4.9) • Added 1 % tolerance specification for DSLCT pull-up resistor (Section 4.10.2) • Amended digital pin drive-strength options (Section 8.7)
A6 APR 2026	<ul style="list-style-type: none"> • Clarified the PLL/DLL lock time specifications (Table 3-8) • Removed overtemperature warning indication (Table 3-9, Section 4.2.1) • Updated output-code calculations (Section 5.2)

Important: Please check www.cirrus.com or with your Cirrus Logic sales representative to confirm that you are using the latest revision of this document and to determine whether there are errata associated with this device.

Contacting Cirrus Logic Support

For all product questions and inquiries, contact a Cirrus Logic Sales Representative.

To find one nearest you, go to www.cirrus.com.

IMPORTANT NOTICE

"Advance" product information describes products that are in development and subject to substantial development changes. For the purposes of our terms and conditions of sale, "Preliminary" or "Advance" datasheets are nonfinal datasheets that include, but are not limited to, datasheets marked as "Target", "Advance", "Product Preview", "Preliminary Technical Data" and/or "Preproduction." Products provided with any such datasheet are therefore subject to relevant terms and conditions associated with "Preliminary" or "Advance" designations, as set out in our terms and conditions of sale, including but not limited to that Cirrus Logic expressly disclaims any warranties with respect to such products. The products and services of Cirrus Logic International (UK) Limited; Cirrus Logic, Inc.; and other companies in the Cirrus Logic group (collectively either "Cirrus Logic" or "Cirrus") are sold subject to Cirrus Logic's terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. Software is provided pursuant to applicable license terms. Cirrus Logic reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Cirrus Logic to verify that the information is current and complete. Testing and other quality control techniques are utilized to the extent Cirrus Logic deems necessary. Specific testing of all parameters of each device is not necessarily performed. In order to minimize risks associated with customer applications, the customer must use adequate design and operating safeguards to minimize inherent or procedural hazards. Cirrus Logic is not liable for applications assistance or customer product design. The customer is solely responsible for its overall product design, end-use applications, and system security, including the specific manner in which it uses Cirrus Logic components. Certain uses or product designs may require an intellectual property license from a third party. Features and operations described herein are for illustrative purposes only and do not constitute a suggestion or instruction to adopt a particular product design or a particular mode of operation for a Cirrus Logic component.

CIRRUS LOGIC PRODUCTS ARE NOT DESIGNED, TESTED, INTENDED OR WARRANTED FOR USE (1) WITH OR IN IMPLANTABLE PRODUCTS OR FDA/ MHRA CLASS III (OR EQUIVALENT CLASSIFICATION) MEDICAL DEVICES, OR (2) IN ANY PRODUCTS, APPLICATIONS OR SYSTEMS, INCLUDING WITHOUT LIMITATION LIFE-CRITICAL MEDICAL EQUIPMENT OR SAFETY OR SECURITY EQUIPMENT, WHERE MALFUNCTION OF THE PRODUCT COULD CAUSE PERSONAL INJURY, DEATH, SEVERE PROPERTY DAMAGE OR SEVERE ENVIRONMENTAL HARM. INCLUSION OF CIRRUS LOGIC PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK AND CIRRUS LOGIC DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUS LOGIC PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER'S CUSTOMER USES OR PERMITS THE USE OF CIRRUS LOGIC PRODUCTS IN SUCH A MANNER, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUS LOGIC, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS' FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

This document is the property of Cirrus Logic, and you may not use this document in connection with any legal analysis concerning Cirrus Logic products described herein. No license to any technology or intellectual property right of Cirrus Logic or any third party is granted herein, including but not limited to any patent right, copyright, mask work right, or other intellectual property rights. Any provision or publication of any third party's products or services does not constitute Cirrus Logic's approval, license, warranty or endorsement thereof. Cirrus Logic gives consent for copies to be made of the information contained herein only for use within your organization with respect to Cirrus Logic integrated circuits or other products of Cirrus Logic, and only if the reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices and conditions (including this notice). This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale. This document and its information is provided "AS IS" without warranty of any kind (express or implied). All statutory warranties and conditions are excluded to the fullest extent possible. No responsibility is assumed by Cirrus Logic for the use of information herein, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. Cirrus Logic, Cirrus, the Cirrus Logic logo design, and SoundClear are among the trademarks of Cirrus Logic. Other brand and product names may be trademarks or service marks of their respective owners.

Copyright © 2023–2026 Cirrus Logic, Inc. and Cirrus Logic International Semiconductor Ltd. All rights reserved.