



DOC TYPE:	SCHEMATIC AND LAYOUT
BOARD REFERENCE:	6220-EV1-REV1
BOARD TYPE:	Customer Main
WOLFSON DEVICE(S):	WM8993
DATE:	May 2009
DOC REVISION:	Rev 1.0

SCHEMATIC






Sheet 1: Functional Diagram

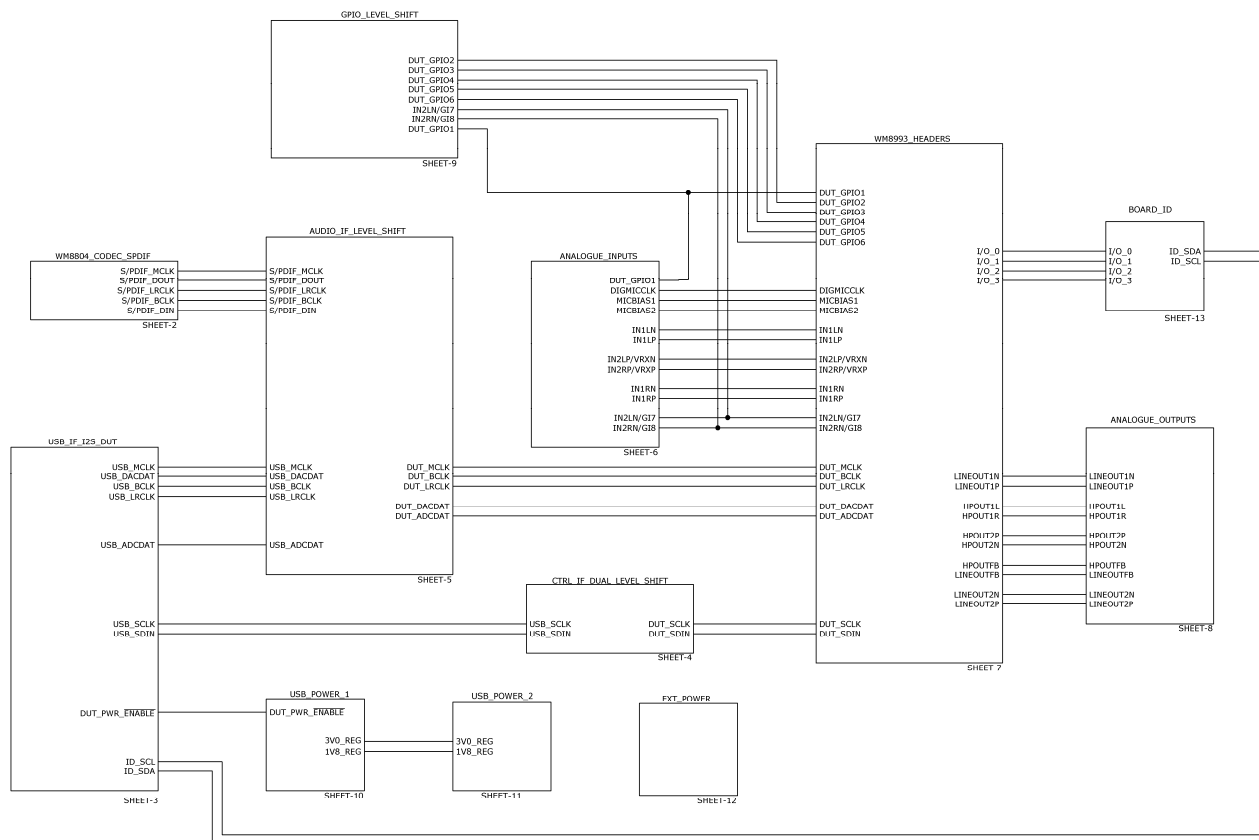

Sheet 2: S/PDIF Interface

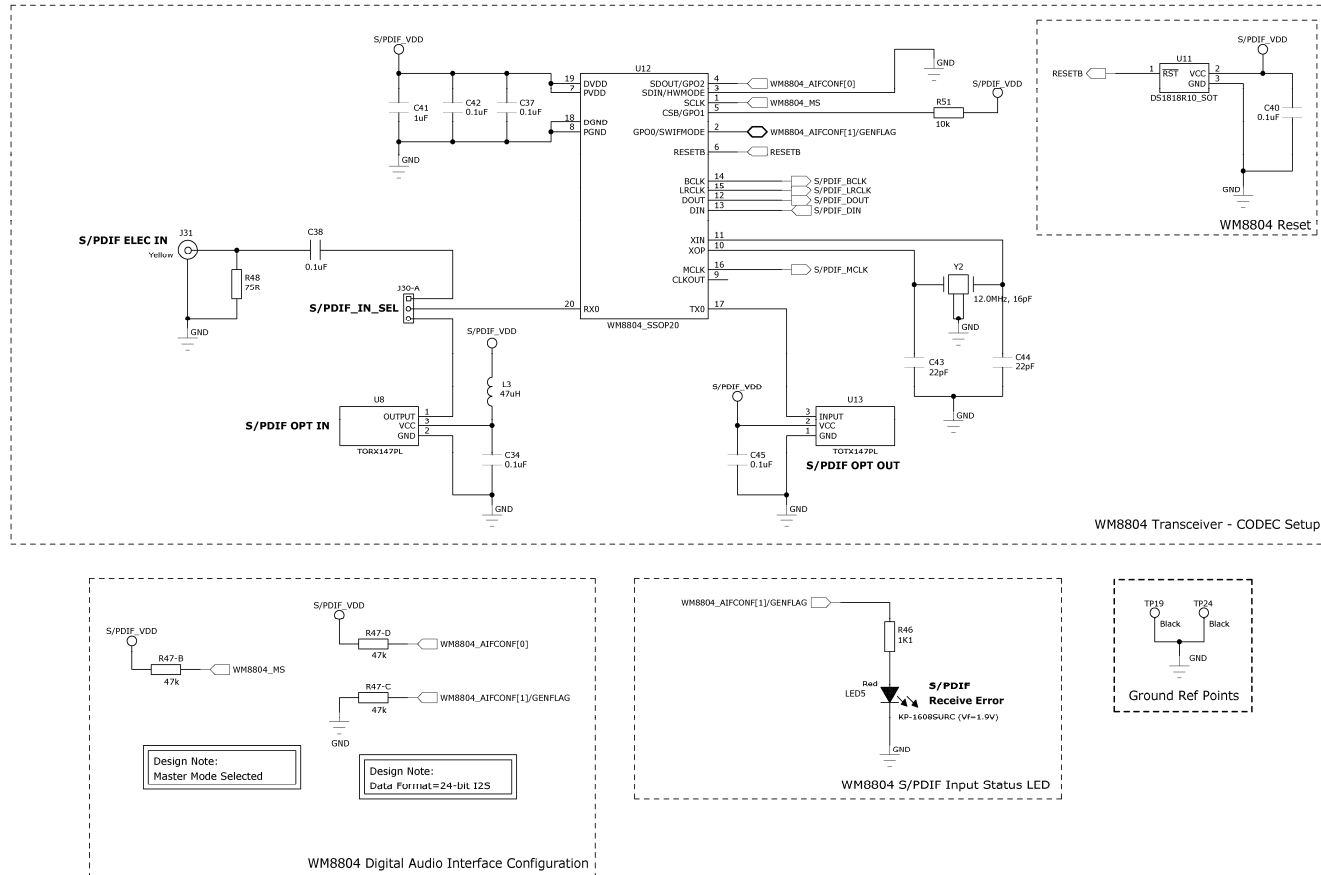


Sheet 4: Control I/F Level Shift

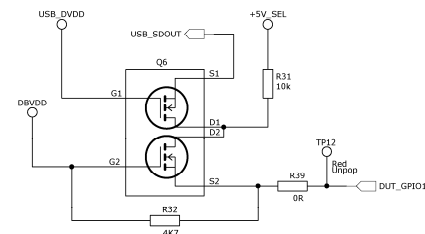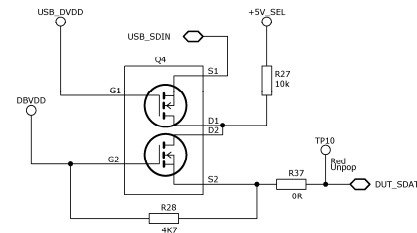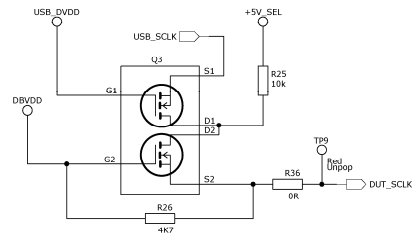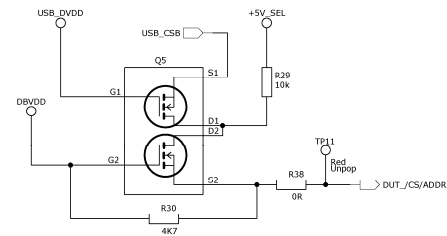
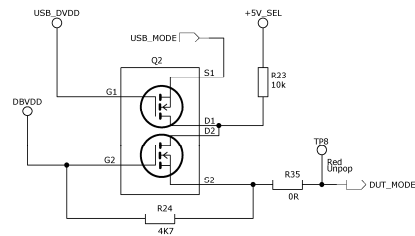


DESIGN NOTE



In 4-wire mode SDOUT from the DUT should be configured on GPI01.






Sheet 5: Audio I/F Level Shift

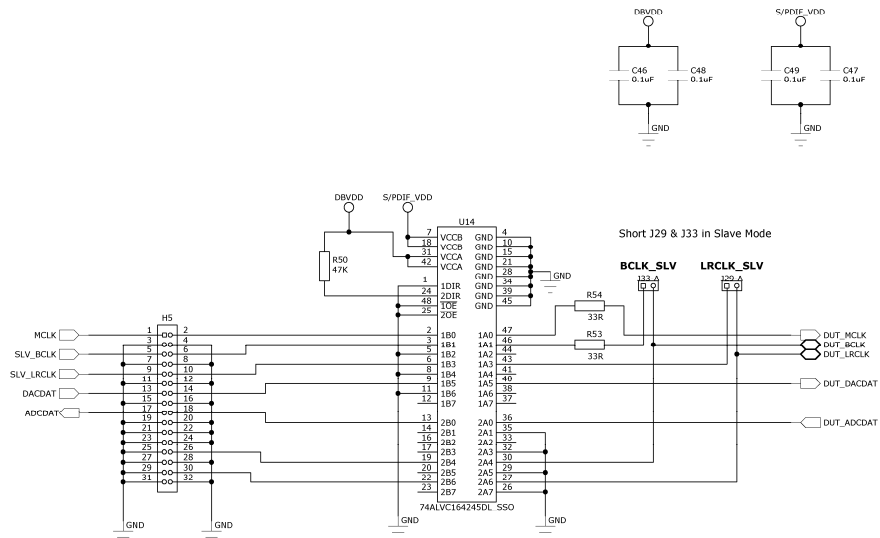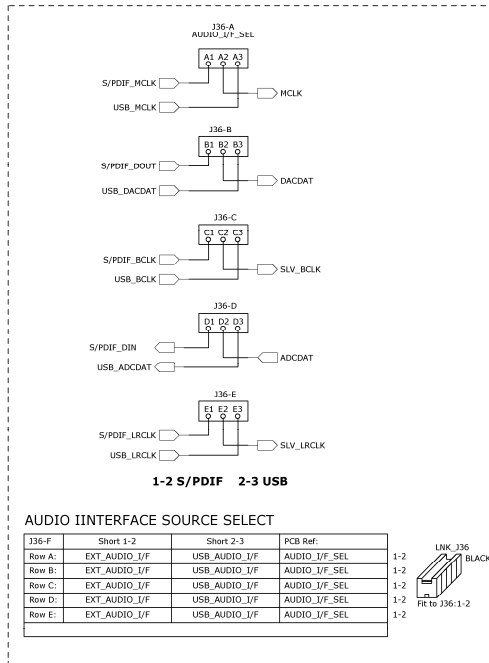




Sheet 6: Audio Inputs

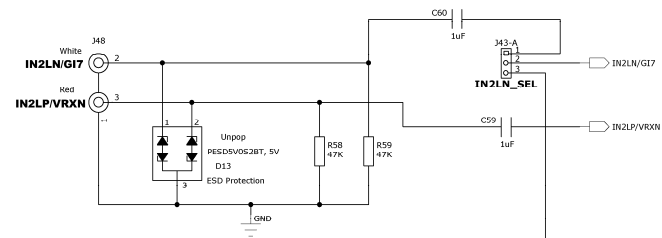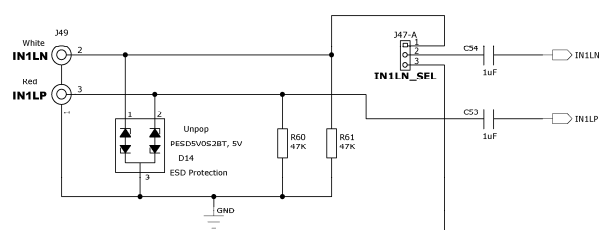


User Note:
 When MIC is not in use MICBIAS should be disabled in the register settings

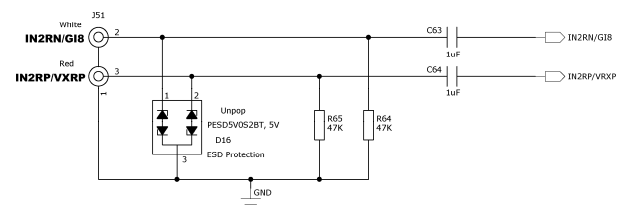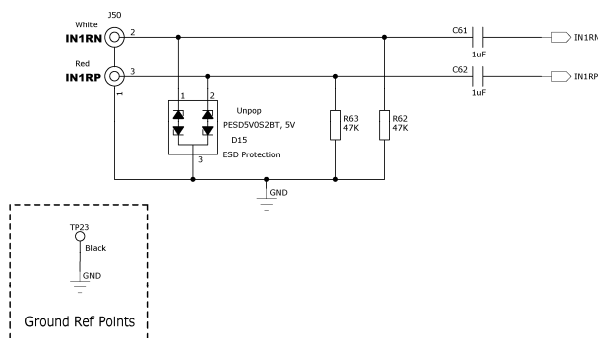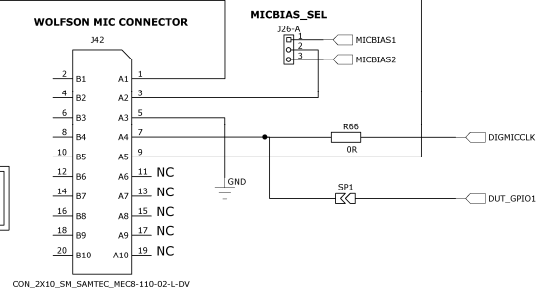




Sheet 7: DUT Headers

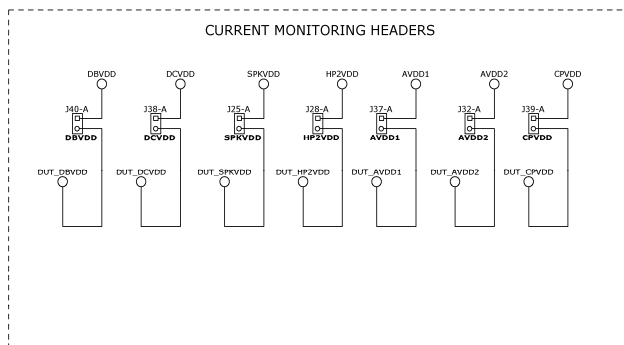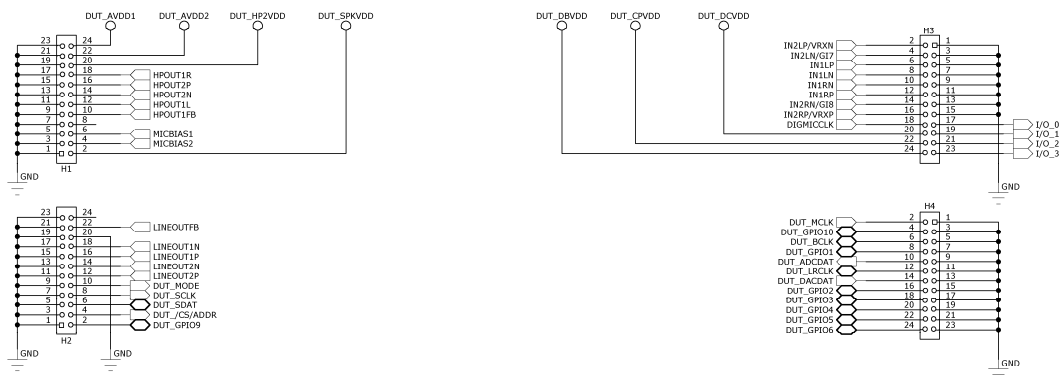

Sheet 8: Audio Outputs

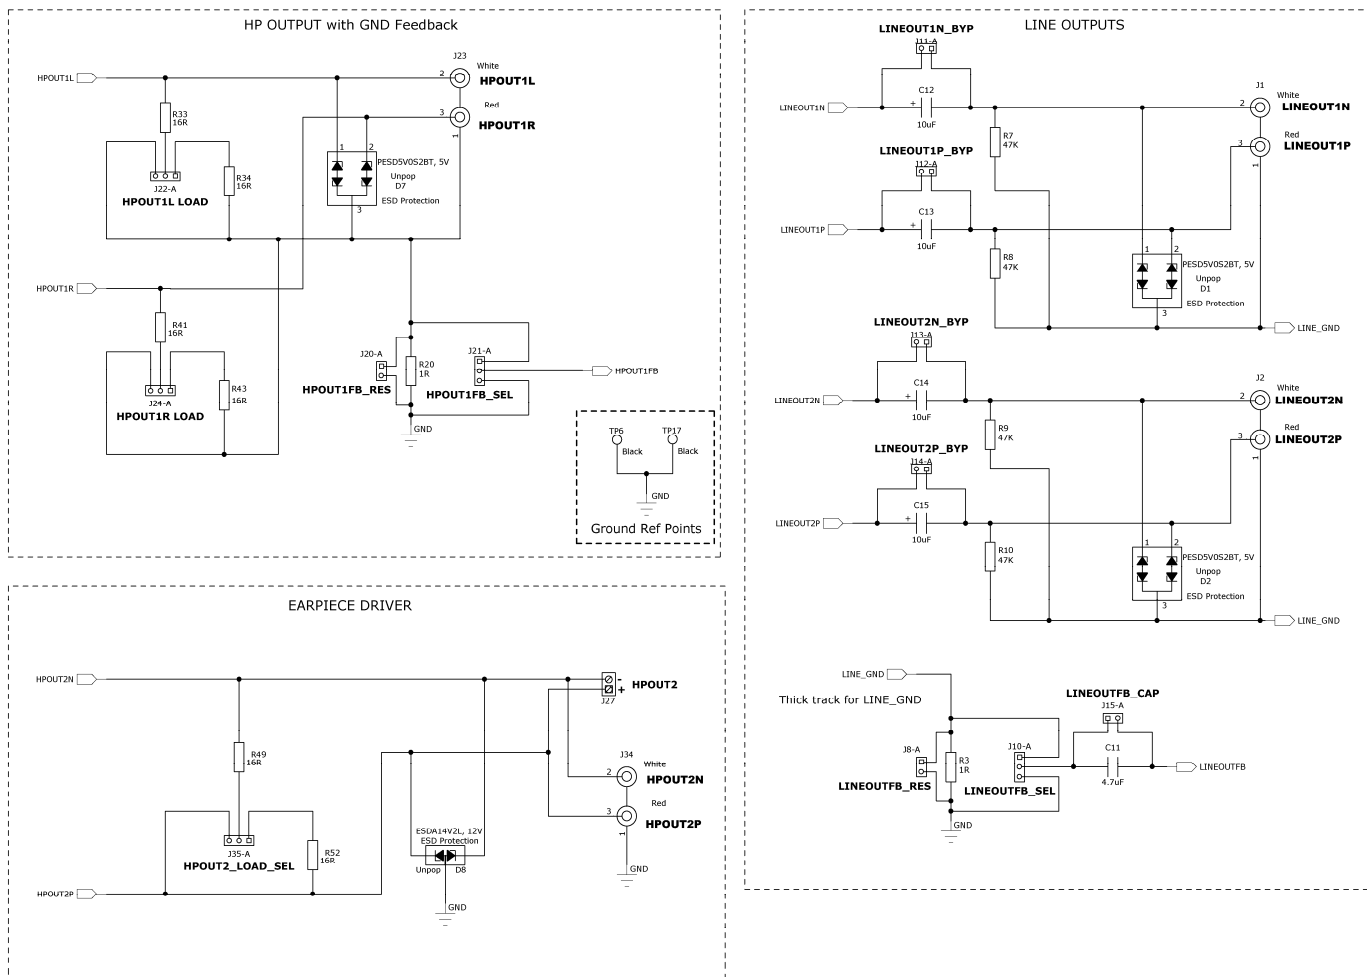


Sheet 9: GPIO Interface

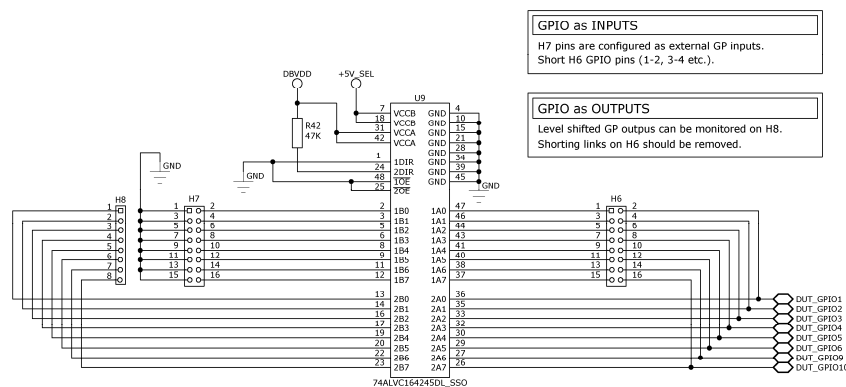



The schematic diagram illustrates the power regulation and status indicators for the USB to UART bridge circuit. It includes the following components and sections:

- USB Power Input:** USB_VBUS and USB_DVDD are connected to the circuit. A 1R50 resistor (R1) is connected to USB_VBUS.
- Design Note:** U1218 is TAS1020B +3V3 PSU.
- SPKVDD Section:**
 - U2 (REG_KF33BD_SO) is a 3.3V LDO. Its VIN is connected to USB_DVDD through a 10uF capacitor (C3). Its VOUT is connected to SPKVDD.
 - Design Note: SPKVDD is connected to the 5.0V USB supply by default. In this configuration current drive is limited to 500mA. To provide higher current drive use the external supply.
- Low-Voltage Indicator:**
 - U1 (XC61CN4402NRN) is a low-voltage detector. Its IN is connected to SPKVDD. Its OUT is connected to LED1 (Red).
 - Design Note: USB PWR LOW!
- 3.0V ANALOGUE SUPPLIES:**
 - U5 (REG_LM1117MP-ADJ) is a 3.0V LDO. Its IN is connected to EXT +5V. Its OUT is connected to 3V0_REG.
 - Design Note: 3.0V ANALOGUE SUPPLIES LM1117 Adjustable LDO $V_{out} = 1.25(1 + 470/330) = 3.03V$
- 3.6V S/PDIF SUPPLY:**
 - U7 (REG_LM1117MP-ADJ) is a 3.6V LDO. Its IN is connected to EXT +5V. Its OUT is connected to S/PDIF_VDD.
 - Design Note: 3.6V S/PDIF SUPPLY LM1117 Adjustable LDO $V_{out} = 1.25(1 + 620/330) = 3.6V$
- S/PDIF POWER OK:**
 - U4 (KP-1608BMC) is a PNP transistor. Its emitter is connected to S/PDIF_VDD. Its collector is connected to LED4 (Green).
 - Design Note: S/PDIF POWER OK
- 1.8V SUPPLIES:**
 - U15 (REG_LM1117MP-ADJ) is a 1.8V LDO. Its IN is connected to EXT +5V. Its OUT is connected to 1V8_REG.
 - Design Note: 1.8V SUPPLIES LM1117 Adjustable LDO $V_{out} = 1.25(1 + 150/330) = 1.818V$
- Ground Ref Points:**
 - TP25 (Black) and TP27 (Black) are ground reference points.
- Other Components:**
 - U3 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U6 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U8 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U9 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U10 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U11 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U12 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U13 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U14 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U16 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U17 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U18 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U19 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U20 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U21 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U22 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U23 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U24 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U25 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U26 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U27 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U28 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U29 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U30 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U31 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U32 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U33 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U34 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U35 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U36 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U37 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U38 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U39 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U40 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U41 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U42 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U43 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U44 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U45 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U46 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U47 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U48 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U49 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U50 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U51 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U52 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U53 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U54 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U55 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U56 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U57 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U58 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U59 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U60 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U61 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U62 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U63 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U64 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U65 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U66 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U67 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U68 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U69 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U70 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U71 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U72 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U73 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U74 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U75 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U76 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U77 (TAS1020B) is a USB-to-UART bridge IC. Its VDD is connected to SPKVDD. Its GND is connected to GND.
 - U


Sheet 11: USB Power 2

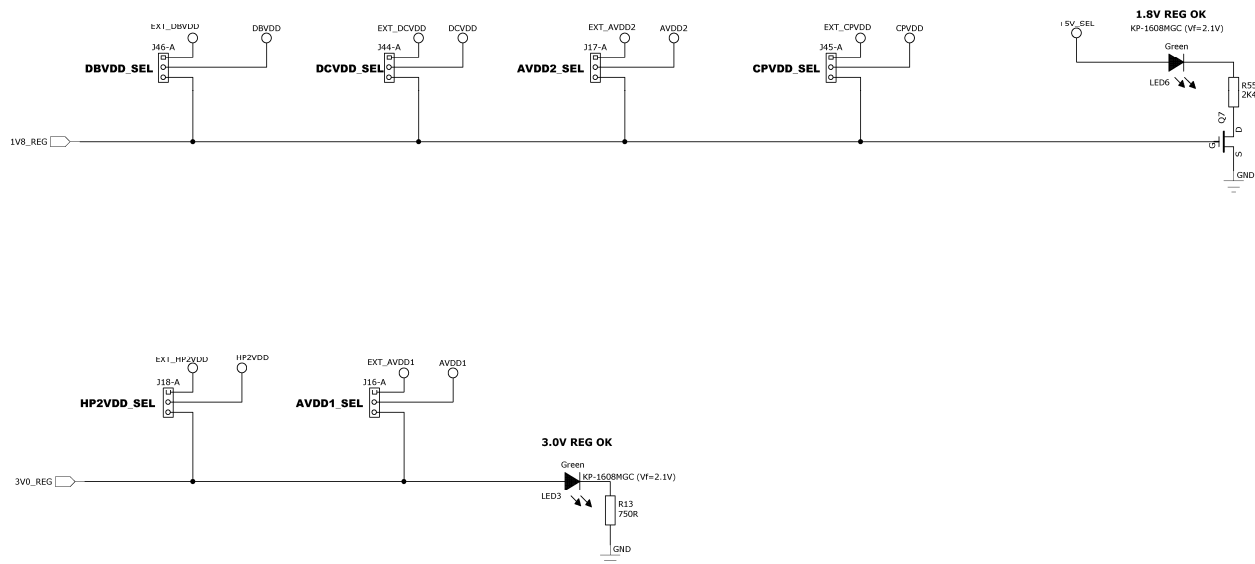

Sheet 12: External Power

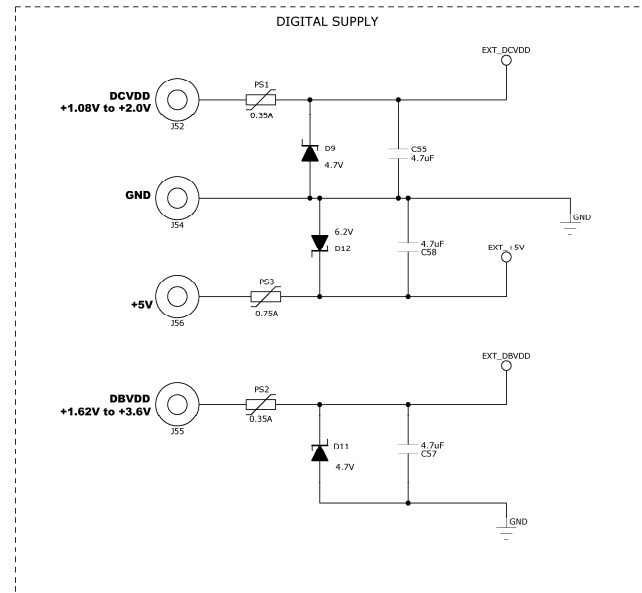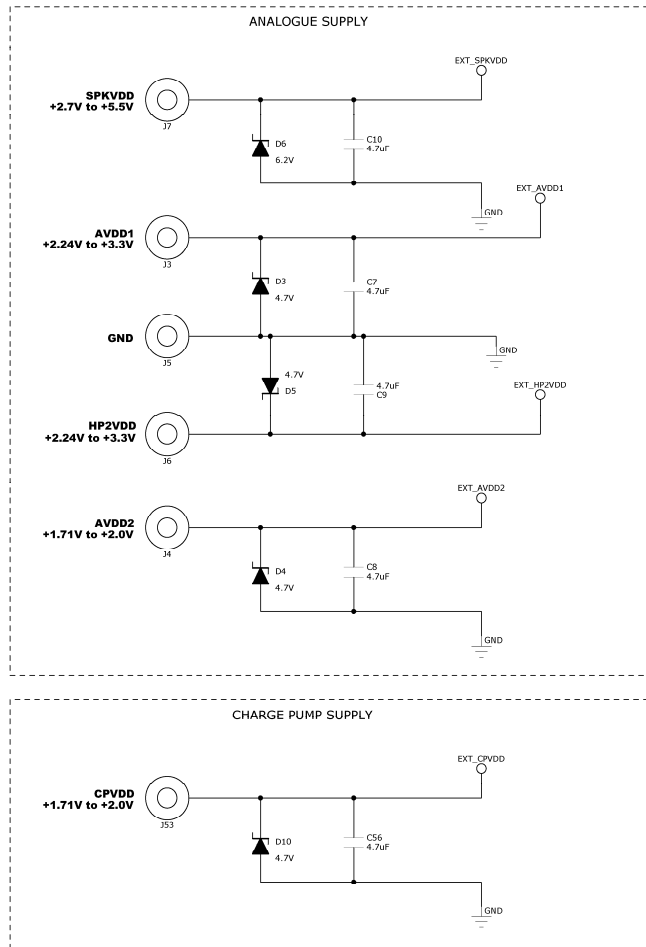

Note:
PS = Poly Switch for over-current protection
D = Diodes for reverse polarity protection

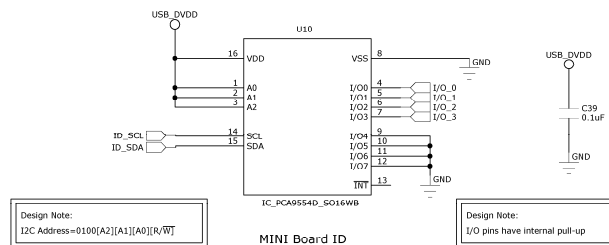

Sheet 14: Mechanical Information

TABLES & TEXT TO GO ON PCB

H6 & H7
2 GPI01
4 GPI02
6 GPI03
8 GPI04
10 GPI05
12 GPI06
14 GPI09
16 GPI010

To go next to H6

H5
2 MCLK
6 SILV_BCLK
10 SILV_LRCLK
14 DACDAT
18 ADCDAT
26 MSTR_BCLK
30 MSTR_LRCLK

To go next to H5



LINK_HS-1
YELLOW
Fit to: HS:1-2



LINK_HS-2
YELLOW
Fit to: HS:5-6



LINK_HS-3
YELLOW
Fit to: HS:9-10



LINK_HS-4
YELLOW
Fit to: HS:13-14



LINK_HS-5
YELLOW
Fit to: HS:17-18




LINK_HS-6
YELLOW
Fit to: HS:25-26




LINK_HS-7
YELLOW
Fit to: HS:29-30

STANDARD MECHANICAL REQUIREMENTS

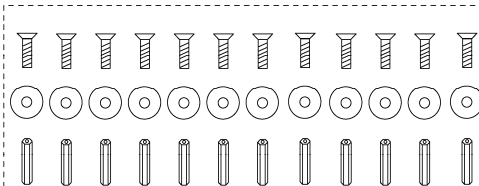

FD1 FIDUCIAL
FD2 FIDUCIAL
FD3 FIDUCIAL



Sheet 15: Reference Tables

TABLES FOR REFERENCE

AUDIO_IF_LEVEL_SHIFT

133-B	Short	Open	UNK_133
	Slave	Master	YELLOW
PCB Ref:	BCLK_SLV		Short
129-B	Short	Open	UNK_129
	Slave	Master	YELLOW
PCB Ref:	LKCLK_SLV		Short

Note:
1. Short J25 & J28 in Slave Mode

WM8804 S/PDIF

130-B	Short 1-2	Short 2-3	UNK_130
	Electrical Input	Optical Input	YELLOW
PCB Ref:	S/PDIF_IN_SEL		1-2

ANALOGUE OUTPUTS: HPOUT1

122-B	Short 1-2	Short 2-3	UNK_122
	32K load	16K load	YELLOW
PCB Ref:	HPOUT1L_LOAD		2-3
124-B	Short 1-2	Short 2-3	UNK_124
	32K load	16K load	YELLOW
PCB Ref:	HPOUT1R_LOAD		2-3
120-B	Short	Open	UNK_120
	No resistor in circuit	Resistor in circuit	YELLOW
PCB Ref:	HPOUT1FB_RES		Short
121-B	Short 1-2	Short 2-3	UNK_121
	Pre Resistor	Post Resistor	YELLOW
PCB Ref:	HPOUT1FB_SEL		2-3

ANALOGUE OUTPUTS: HPOUT2

135-B	Short 1-2	Short 2-3	UNK_135
	32K load	16K load	YELLOW
PCB Ref:	HPOUT2_LOAD_SEL		2-3

ANALOGUE_INPUTS

147-B	Short 1-2	Short 2-3	UNK_147
	IN1LN Phono	ANA MIC	YELLOW
PCB Ref:	IN1LN_SEL		1-2
143-B	Short 1-2	Short 2-3	UNK_143
	IN2LN Phono	DIG MIC	YELLOW
PCB Ref:	IN2LN_SEL		1-2
126-B	Short 1-2	Short 2-3	UNK_126
	MICBIAS1	MICBIAS2	YELLOW
PCB Ref:	MICBIAS_SEL		1-2

ANALOGUE_OUTPUTS: LINEOUT

111-B	Short	Open	UNK_111
	Capacitor Bypass	AC Coupled	YELLOW
PCB Ref:	LINEOUT1N_BYP		Open
112-B	Short	Open	UNK_112
	Capacitor Bypass	AC Coupled	YELLOW
PCB Ref:	LINEOUT1P_BYP		Open
113-B	Short	Open	UNK_113
	Capacitor Bypass	AC Coupled	YELLOW
PCB Ref:	LINEOUT2N_BYP		Open
114-B	Short	Open	UNK_114
	Capacitor Bypass	AC Coupled	YELLOW
PCB Ref:	LINEOUT2P_BYP		Open
108-B	Short	Open	UNK_108
	No resistor in circuit	Resistor in circuit	YELLOW
PCB Ref:	LINEOUTFB_RES		Short
110-B	Short 1-2	Short 2-3	UNK_110
	Pre Resistor	Post Resistor	YELLOW
PCB Ref:	LINEOUTFB_SEL		2-3
115-B	Short	Open	UNK_115
	Cap bypassed	Cap in circuit	YELLOW
PCB Ref:	LINEOUTFB_CAP		Open

USB_POWER

141-B	Short 1-2	Short 2-3	UNK_141
	DXT_+5V	USB +5V	RED
PCB Ref:	+5V_SEL		2-3
118-B	Short 1-2	Short 2-3	UNK_118
	EXT_HP2VDD	USB HP2VDD	RED
PCB Ref:	HP2VDD_SEL		2-3
116-B	Short 1-2	Short 2-3	UNK_116
	EXT_AVDD1	USB_AVDD1	RED
PCB Ref:	AVDD1_SEL		2-3
146-B	Short 1-2	Short 2-3	UNK_146
	EXT_DBVDD	USB DBVDD	RED
PCB Ref:	DBVDD_SEL		2-3
144-B	Short 1-2	Short 2-3	UNK_144
	EXT_DCVDD	USB DCVDD	RED
PCB Ref:	DCVDD_SEL		2-3
119-B	Short 1-2	Short 2-3	UNK_119
	EXT_SPKVD	USB SPKVD	RED
PCB Ref:	SPKVD_SEL		2-3
117-B	Short 1-2	Short 2-3	UNK_117
	EXT_AVDD2	USB AVDD2	RED
PCB Ref:	AVDD2_SEL		2-3
145-B	Short 1-2	Short 2-3	UNK_145
	EXT_CPVDD	USB CPVDD	RED
PCB Ref:	CPVDD_SEL		2-3

POWER SUPPLY CONNECTORS

140-B	Short	Open	UNK_140
	DUT_DBVDD	Current measurement	RED
PCB Ref:	DBVDD		Short
138-B	Short	Open	UNK_138
	DUT_DCVDD	Current measurement	RED
PCB Ref:	DCVDD		Short
125-B	Short	Open	UNK_125
	DUT_SPKVD	Current measurement	RED
PCB Ref:	SPKVD		Short
128-B	Short	Open	UNK_128
	DUT_HP2VDD	Current measurement	RED
PCB Ref:	HP2VDD		Short
137-B	Short	Open	UNK_137
	DUT_AVDD1	Current measurement	RED
PCB Ref:	AVDD1		Short
132-B	Short	Open	UNK_132
	DUT_AVDD2	Current measurement	RED
PCB Ref:	AVDD2		Short
139-B	Short	Open	UNK_139
	DUT_CPVDD	Current measurement	RED
PCB Ref:	CPVDD		Short

BILL OF MATERIALS (BOM)


<i>Item</i>	<i>RefDes</i>	<i>Description</i>	<i>Manufacturer</i>	<i>Manufacturer's Part Number</i>
1	MSC3	Grip Seal Bag, 90x115mm	CPC	PA123
2	U9 U14	74ALVC164245 16 Bit Dual Supply Bus Transceiver SSO	Philips	74ALVC164245DL
3	U4	USB Streaming Controller	Texas Instruments	TAS1020BPFB
4	C3	10uF 0805 SMD Ceramic Capacitor 6.3V X5R	MuRata	GRM21BR60J106KE19L
5	C7 C8 C9 C10 C11 C52 C55 C56 C57 C58	4.7uF 0603 SMD Ceramic Capacitor 6.3V X5R	MuRata	GRM188R60J475KE19D
6	C21 C22	27pF 0603 SMD Ceramic Capacitor 50V NPO	Panasonic	ECJ-1VC1H270J
7	J31	Phono Socket PCB mount YELLOW	Dragon City	RS109 - Yellow
8	MSC2	Lead-free label, 15mm round	Brady	805794
9	H6 H7	2x8 2.54mm pitch PCB Pin Header VERTICAL	Harwin	M20-9980845
10	J8 J11 J12 J13 J14 J15 J20 J25 J28 J29 J32 J33 J37 J38 J39 J40	1x2 PCB Pin Header 0.1" VERTICAL	Harwin	M20-9990245
11	J10 J16 J17 J18 J19 J21 J22 J24 J26 J30 J35 J41 J43 J44 J45 J46 J47	1x3 2.54mm Header Vertical	Harwin	M20-9990345
12	H8	1x8 2.54mm pitch PCB Pin Header VERTICAL	Harwin	M20-9990845
13	Q1	BC847BS NPN Dual Bipolar Transistor SOT363	Philips	BC847BS
14	J9	USB receptacle Type B	FCI	61729-0010BLF
15	R49 R52	16R 1206 SMD chip resistor 2% 0.25W	Welwyn	WCR 1206 16R 2%
16	MECH1	IC Socket DIL 8 WAY	Multicomp	2227MC-08-03-F1
17	C12 C13 C14 C15 C27 C33 C51	10uF 10V SMD Tantalum Capacitor case A	Kemet	T491A106K010AT
18	R3 R20	1R 0805 SMD chip resistor 2% 0.1W	Meggitt	CRL1220 1R0
19	PS1 PS2	0.35A Poly Switch 1210	Tyco	MICROSMD035F-2
20	J27	PCB mount 1X2 terminal block for 2.5mm wire guage	LUMBERG	KRM 02
21	L1 L2	300R 0805 BMB2A Ferrite Bead	Meggitt	BMB2A0300AN1
22	L3	47uH 1210 Surface Mount Inductor 'PA series'	Panasonic	ELJPA470KF
23	U8	TORX147PL Digital Audio Fiber Optic Receiver	Toshiba	TORX147PL
24	U13	Fiber Optic Transmitting Module for Digital Audio Interface	Toshiba	TOTX147PL
25	PS3	0.75A Poly Switch 1210	Raychem	MICROSMD075F-2
26	SC1 SC2 SC3 SC4 SC5 SC6 SC7 SC8 SC9 SC10 SC11 SC12	Slotted Panhead Screw - M3 thread; 12mm long	TR Fasteners	M312 PSSTM CZ100-
27	W1 W2 W3 W4 W5 W6 W7 W8 W9 W10 W11 W12	Plain M3 size washer	TR Fasteners	M3-FABRWAN100-
28	Q2 Q3 Q4 Q5 Q6	Si1902DL N- Channel Dual MOSFET SC-70	Vishay	SI1902DL-T1-E3
29	C26 C32 C50	47uF 10V SMD Tantalum Capacitor case C	AVX	TAJC476K010R
30	R1	1R50 1206 SMD chip resistor 5% 0.25W	Vishay	2312 1551 1508

Item	RefDes	Description	Manufacturer	Manufacturer's Part Number
31	C1 C2 C16 C17 C18 C23 C24 C25 C30 C31 C34 C35 C36 C37 C38 C39 C40 C42 C45 C46 C47 C48 C49	0.1uF 0603 SMD Ceramic Capacitor 16V X7R	Phycomp	2238 786 15649
32	C5 C6	47pF 0603 SMD Ceramic Capacitor 50V NPO	AVX	06035A470JAT2A
33	C28 C29	220pF 0603 SMD Ceramic Capacitor 50V NPO	AVX	06035A221JAT2A
34	P1 P2 P3 P4 P5 P6 P7 P8 P9 P10 P11 P12	Hexagonal brass M3 size spacer 20mm length	Harwin	R6379-02
35	C43 C44	22pF 0603 SMD Ceramic Capacitor 50V NPO	Phycomp	2238 867 15229
36	C4	0.01uF 0603 SMD Ceramic Capacitor 50V X7R	Phycomp	2238 586 15636
37	LED2 LED3 LED4 LED6	KP-1608MGC 0603 SMD Chip LED GREEN	Kingbright	KP-1608MGC
38	LED1 LED5	KP-1608SURC 0603 SMD Chip LED RED	Kingbright	KP-1608SURC
39	TP1 TP2 TP5 TP6 TP7 TP13 TP14 TP15 TP17 TP18 TP19 TP20 TP21 TP23 TP24 TP25	1.32mm PCB Test Terminal BLACK	Vero	20-2136
40	TP3 TP4 TP16 TP22	1.32mm PCB Test Terminal RED	Vero	20-313141
41	R18	10K 1206 SMD chip 4 resistor array 5% 0.063W	Phycomp	2350 03510 103
42	R47	47k 1206 SMD chip 4 resistor array 5% 0.063W	Phycomp	2350 035 10473
43	R14 R16 R23 R25 R27 R29 R31 R51	10k 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 10K
44	R15 R19	100K 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 100K
45	R17 R40 R46	1K1 0603 SMD chip resistor 1% 0.1W	Multicomp	MC 0.063W 0603 1% 1K1
46	R56	150R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 150R
47	R6	1k5 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 1K5
48	R33 R34 R41 R43	16R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 16R
49	R2 R55	2K4 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 2K4
50	R4 R5	27R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 27R
51	R12	3K0 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 3K
52	R22 R45 R57	330R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 330R
53	R53 R54	33R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 33R
54	R24 R26 R28 R30 R32	4K7 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 4K7
55	R7 R8 R9 R10 R11 R42 R50 R58 R59 R60 R61 R62 R63 R64 R65	47K 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 47K
56	R44	620R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 620R
57	R13	750R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 750R
58	R48	75R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 1% 75R
59	R35 R36 R37 R38 R39 R66	0R 0603 SMD chip resistor 1% 0.063W	Multicomp	MC 0.063W 0603 0R
60	C19	100pF 0603 SMD Ceramic Capacitor 50V NPO	Multicomp	U0603C101JCT
61	C20	1000pF 0603 SMD Ceramic Capacitor 50V NPO	Multicomp	U0603C102JCT


Item	RefDes	Description	Manufacturer	Manufacturer's Part Number
62	C53 C54 C59 C60 C61 C62 C63 C64	1uF 0805 SMD Ceramic Capacitor 10V X7R	Multicomp	N0805R105KCT
63	T1	P-Channel MOSFET 60v, R _{ds(on)} = 0.17R - SOT23	Vishay	SI2309DS
64	D3 D4 D5 D9 D10 D11	1N5337B 4.7V 5W Zener Diode PTH	ON Semiconductor	1N5337BG
65	D6 D12	1N5341B 6.2V 5W Zener Diode PTH	ON Semiconductor	1N5341BG
66	U3 U11	DS1818 3.3V active-low Power-On-Reset chip SOT	Dallas Semiconductor	DS1818R-10+
67	U2	KF33BD Very Low Drop +3.3V Voltage Regulator SO	ST Microelectronics	KF33BD
68	U6	EEPROM 8x8 i2c interface - with Wolfson "Standard" code	Microchip Technology	24LC64-I/P
69	Q7	BSS138 N-Channel enhancement Mode FET	Fairchild Semiconductor	BSS138
70	Y2	XTAL 12MHz 16pF SM GSX-433 Series	Golledge	GSX-433/111DF 12MHz
71	Y1	6.0MHz GSX-752A/351JF SM Crystal 30pF	Golledge	GSX-752A/351JF 6.0MHz
72	J3 J4 J5 J6 J7 J52 J53 J54 J55 J56	4mm Non-Insulated Panel Socket 16A	PJP	3110I
73	J1 J2 J23 J34 J48 J49 J50 J51	Phono Socket PCB mount Pair Red/White	Rapid	20-1290
74	LNK_J16 LNK_J17 LNK_J18 LNK_J19 LNK_J25 LNK_J28 LNK_J32 LNK_J37 LNK_J38 LNK_J39 LNK_J40 LNK_J41 LNK_J44 LNK_J45 LNK_J46	0.1" OPEN JUMPER LINK RED	Protech	22-3565
75	LNK_H5-7 LNK_H5-6 LNK_H5-5 LNK_H5-4 LNK_H5-3 LNK_H5-2 LNK_H5-1 LNK_J8 LNK_J10 LNK_J20 LNK_J21 LNK_J22 LNK_J24 LNK_J26 LNK_J29 LNK_J30 LNK_J33 LNK_J35 LNK_J43 LNK_J47	0.1" OPEN JUMPER LINK YELLOW	Protech	22-3570
76	R21	470R 0603 SMD chip resistor 1% 0.063W	Tyco	01622949-1
77	U10	PCA9554D I2C I/O Expander	Philips	PCA9554D
78	U5 U7 U15	REG LM1117 1.25 - 13.8V 0.8A ADJUSTABLE	National Semiconductor	LM1117MP-ADJ
79	C41	1uF 0603 SMD Ceramic Capacitor 6.3V X5R	MuRata	GRM188R60J105KA01D
80	LNK_J36	5way, 0.1" Pitch, Open, Black, Jumper Link - Block	Toby	C33-GAG1-2x5-G
81	J42	2x10 way socket, mates with edge connector on 0.062" thick PCB	Samtec	MEC8-110-02-L-DV
82	H1 H2 H3 H4	2x12 2.54mm pitch PCB Pin Header VERTICAL	Toby	THD-12-R
83	H5	2x16 2.54mm pitch PCB Pin Header VERTICAL	Toby	THD-16-R
84	J36	3x5 2.54mm Header Vertical	Toby	THT-5-R
85	U1	XC61C Low Power Consumption Voltage Detector	Torex	XC61CN4402NRN
86	PCB1	PCB	Kelan Circuits Ltd	6220-EV1-REV1
87	U12	WM8804 1:1 Digital Interface Transceiver with PLL	Wolfson Microelectronics	WM8804GEDS

<i>Item</i>	<i>RefDes</i>	<i>Description</i>	<i>Manufacturer</i>	<i>Manufacturer's Part Number</i>
Unpop				
88	TP8 TP9 TP10 TP11 TP12	1.32mm PCB Test Terminal RED	Vero	20-313141
89	D1 D2 D7 D13 D14 D15 D16	TVS Diode PESD5V0S2BT V _{rw} m=5V dual ESD Protection SOT23	Philips	PESD5V0S2BT
90	D8	TVS Diode ESDA14V2L V _{rw} m=12V dual ESD Protection SOT23	ST Microelectronics	ESDA14V2L
91	SP1	Surface mount shorting point	N/A	N/A


Top Layer: Overview

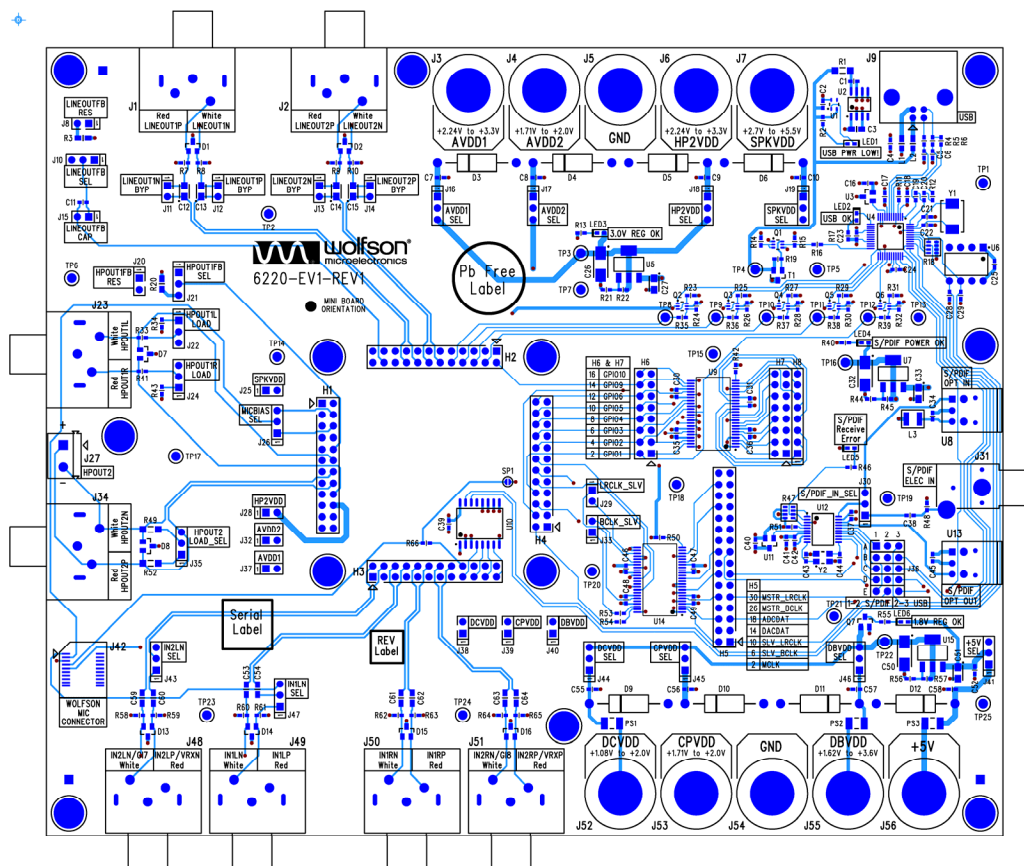


Top Layer: Silkscreen + Copper

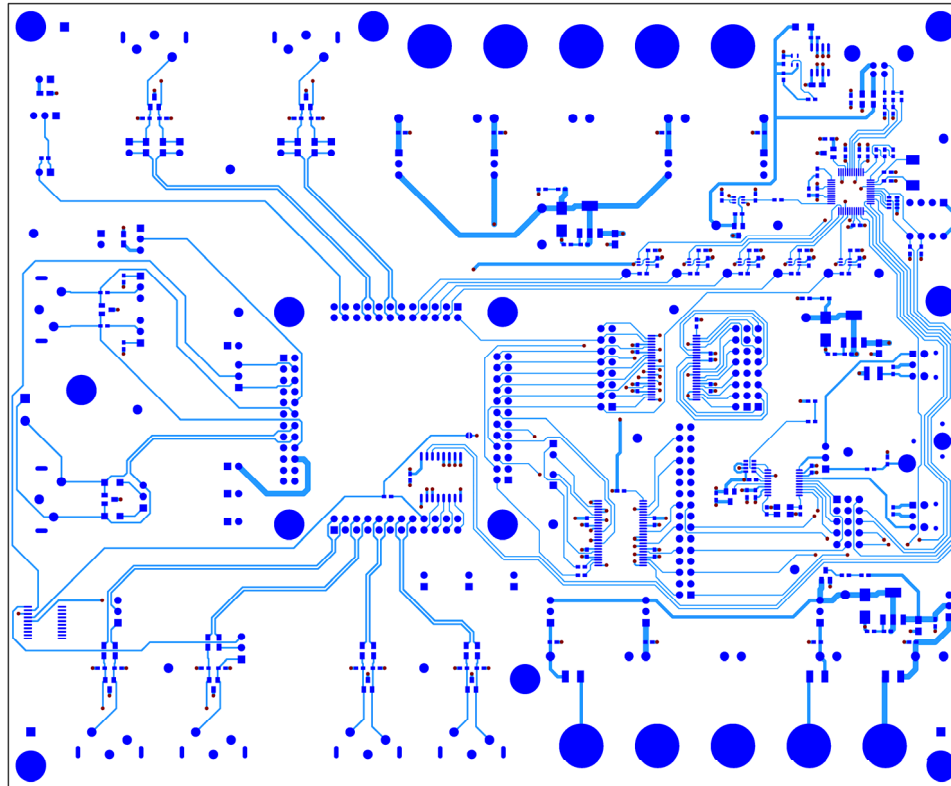


Top Layer: Copper

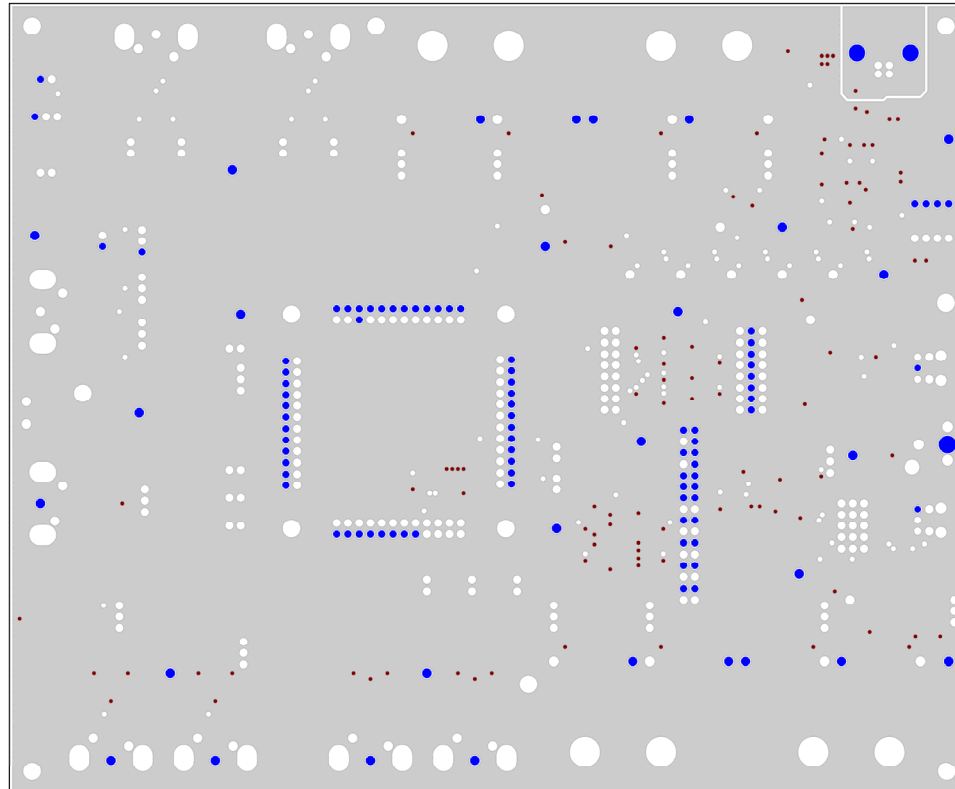

Layer 2: Copper

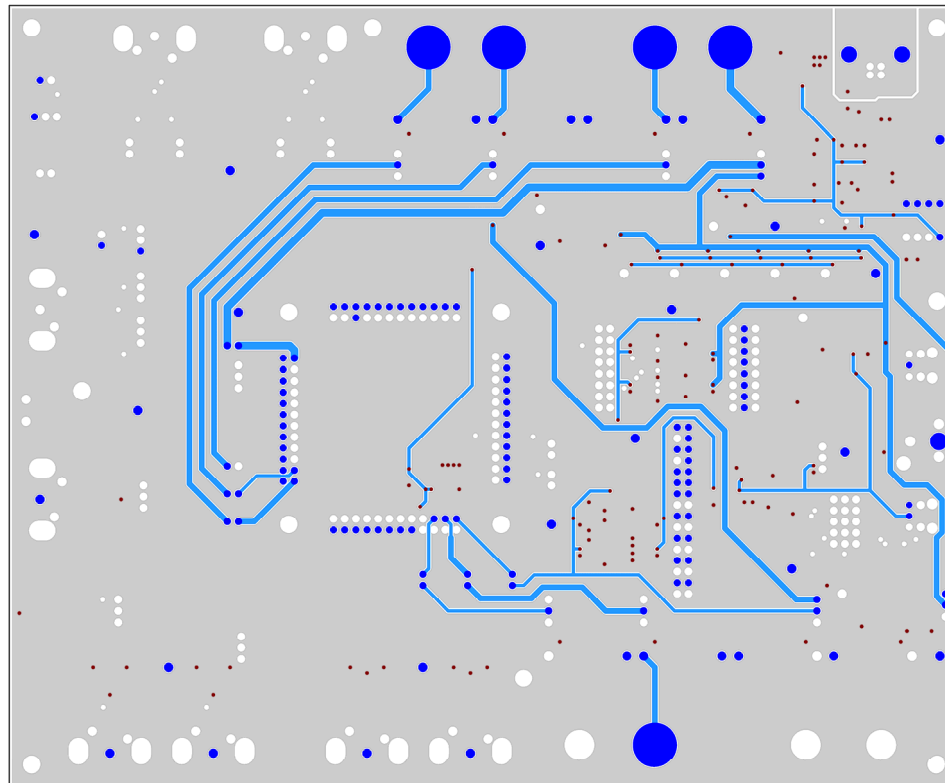


Layer 3: Copper

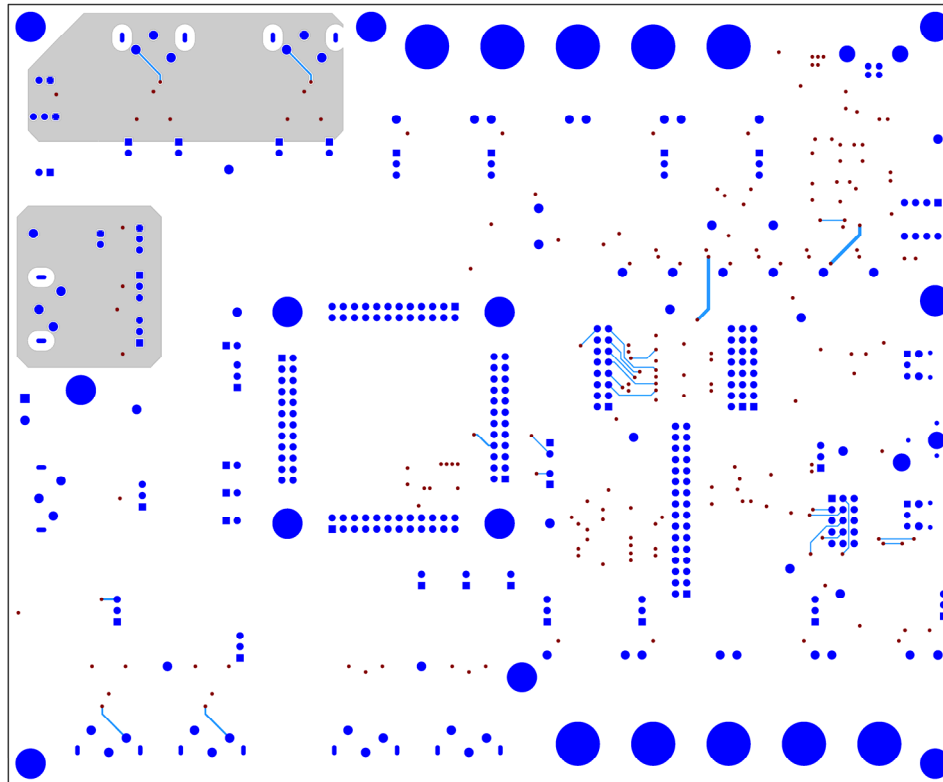

Bottom Layer: Copper

GENERIC BOARD CONFIGURATION

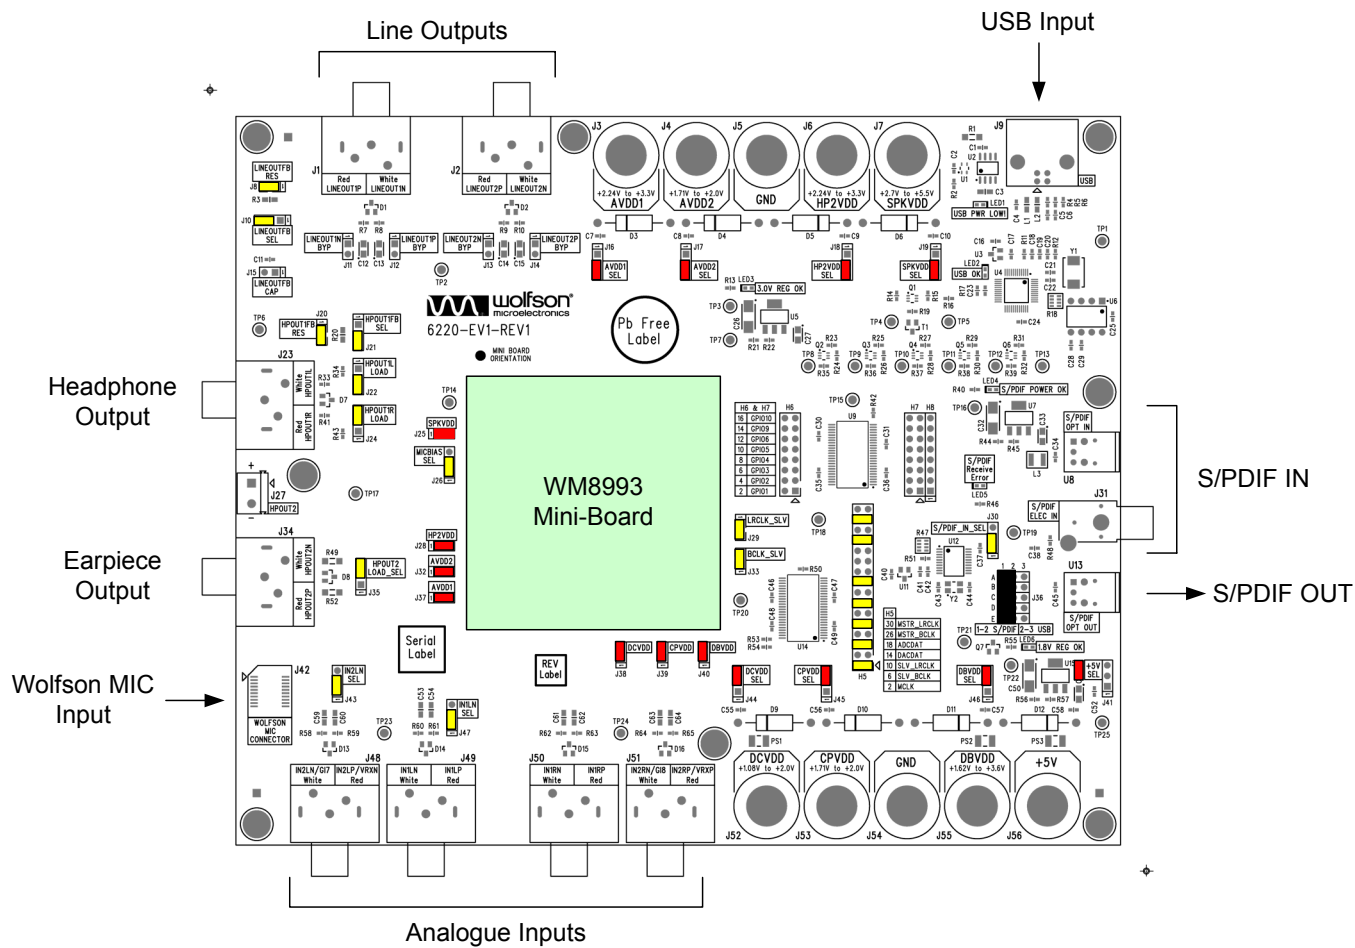

APPLICATION SUPPORT

If you require more information or require technical support, please contact the Wolfson Microelectronics Applications group through the following channels:

Email: apps@wolfsonmicro.com
Telephone Apps: +44 (0) 131 272 7070
Fax: +44 (0) 131 272 7001
Mail: Applications Engineering at the address on the last page

or contact your local Wolfson representative.

Additional information may be made available on our web site at: <http://www.wolfsonmicro.com>

IMPORTANT NOTICE

Wolfson Microelectronics plc ("Wolfson") products and services are sold subject to Wolfson's terms and conditions of sale, delivery and payment supplied at the time of order acknowledgement.

Wolfson warrants performance of its products to the specifications in effect at the date of shipment. Wolfson reserves the right to make changes to its products and specifications or to discontinue any product or service without notice. Customers should therefore obtain the latest version of relevant information from Wolfson to verify that the information is current.

Testing and other quality control techniques are utilised to the extent Wolfson deems necessary to support its warranty. Specific testing of all parameters of each device is not necessarily performed unless required by law or regulation.

In order to minimise risks associated with customer applications, the customer must use adequate design and operating safeguards to minimise inherent or procedural hazards. Wolfson is not liable for applications assistance or customer product design. The customer is solely responsible for its selection and use of Wolfson products. Wolfson is not liable for such selection or use nor for use of any circuitry other than circuitry entirely embodied in a Wolfson product.

Wolfson's products are not intended for use in life support systems, appliances, nuclear systems or systems where malfunction can reasonably be expected to result in personal injury, death or severe property or environmental damage. Any use of products by the customer for such purposes is at the customer's own risk.

Wolfson does not grant any licence (express or implied) under any patent right, copyright, mask work right or other intellectual property right of Wolfson covering or relating to any combination, machine, or process in which its products or services might be or are used. Any provision or publication of any third party's products or services does not constitute Wolfson's approval, licence, warranty or endorsement thereof. Any third party trade marks contained in this document belong to the respective third party owner.

Reproduction of information from Wolfson datasheets is permissible only if reproduction is without alteration and is accompanied by all associated copyright, proprietary and other notices (including this notice) and conditions. Wolfson is not liable for any unauthorised alteration of such information or for any reliance placed thereon.

Any representations made, warranties given, and/or liabilities accepted by any person which differ from those contained in this datasheet or in Wolfson's standard terms and conditions of sale, delivery and payment are made, given and/or accepted at that person's own risk. Wolfson is not liable for any such representations, warranties or liabilities or for any reliance placed thereon by any person.

ADDRESS:

Wolfson Microelectronics plc
Westfield House
26 Westfield Road
Edinburgh
EH11 2QB
United Kingdom
Tel :: +44 (0)131 272 7000
Fax :: +44 (0)131 272 7001
Email :: apps@wolfsonmicro.com